



PRODUCTS CATALOG

Professional Circular Connector Manufacturer
Cable Assembly Solutions Experts



RAYMO ELECTRONICS TECHNOLOGY LIMITED

About "RAYMO"

RAYMO ELECTRONICSTECHNOLOGY LIMITED, here in after referred to as the "RAYMO", as a **Creative customer-oriented** manufacturer located in Shenzhen, focusing on manufacturing connectors and cable assemblies to serve over 75 countries and regions since 2010.

With professional R&D and excellent craftsmanship, our factory has the ability of providing customer with much more precision connectors and cable harness solutions to meet customer's demand in this fields.

RAYMO has already established an integrated quality control system from R&D, Supply Chain, Marketing, Sales, after-sales service to meet customer deeper demand, and expect to achieve Raymo's globalization strategy.

More than 3,000 types connectors

Aimed on providing customer with suitable higher-qualified connectors and cable assemblies, our factory has already designed and developed over 3,000 types of connectors and 1,000 kinds of OEM cable assemblies based on customer real needs since the establishment.

Applications

RAYMO connectors and cable assemblies have been found to be widely used in the areas of telecommunication, electronics, medical equipments, Aviation, Audio-video, Petroleum, motor and power industries, electrical signal connection, IC control systems, test and measurement instruments, etc.

Our Missions

Design and develop more precision and suitable push pull connectors and cable assemblies for all humanity and the world
Provide better living conditions for employees

Certificates

CE, RoHS ,ISO:9001-2015, SGS, REACH



Building



Office



R&D



Production Department



Cable Warehouse



Warehouse



CNC Department



Over-Mold Department

CONTENTS TABLE

RM-F Series

Part Numbering System	5
Metal Housing Models	7
Insulator Configuration	13

RM-T Series

Part Numbering System	19
Metal Housing Models	21
Insulator Configuration	23

RM-L Series

Part Numbering System	27
Metal Housing Models	29
Insulator Configuration	30
Cable Collet (F, T, L)	33

RM-U Series

Part Numbering System	37
Metal Housing Models	39
Insulator Configuration	40

RM-AMC C Series

Part Numbering System	45
Metal Housing Models	47
Insulator Configuration	48

RM-AMC G Series

Part Numbering System	53
Metal Housing Models	55
Insulator Configuration	56

RM-B Series

Part Numbering System	59
Metal Housing Models	61
Cable Collet	68

RM-K Series

Part Numbering System	73
Metal Housing Models	75
Cable Collet	78

RM-W Series

Part Numbering System	83
Metal Housing Models	85
Insulator Configuration(B, K, W, L)	86

RM-S Series

Part Numbering System	93
Metal Housing Models	95
Insulator Configuration	97
Cable Collet	101

RM-P Series

Part Numbering System 105

Plastic Housing Models 107

Insulator Configuration 109

Cable Collet 110

RM-H Series

Part Numbering System 113

Metal Housing Models 115

Insulator Configuration 117

Accessories 119

PCB Drilling Pattern 125

Cable Datasheet 129

Product Safety Notice 138



RM-F Series

Metal Waterproof Push Pull Self-locking Connector

- *Secure high performance push pull self-locking system*
- *Sealed up to IP68 and hermetic*
- *3 codes alignment key and polarized keying system to avoid cross-interface*
- *360° EMC shielded*
- *High pin density contributing to equipment miniaturization*
- *Robust and shock resistant designs*
- *Functional in a wide temperature range from -50°C to +250°C*
- *Available solder, PCB and right angle PCB contact*



RM-F series


Plugs



S/SC



SS/SSC

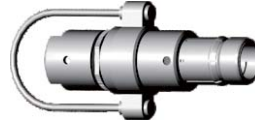

FS7



WSO



SFE/SFU

Receptacles



D



DEE/DEU



DBP



DBPC



DBPE/DBPU



DBPLE/DBPLU



DBEE/DBEU



FG8



FGX



FGD



FGS



KE/K




KSE/KS



PGX

Part Numbering System

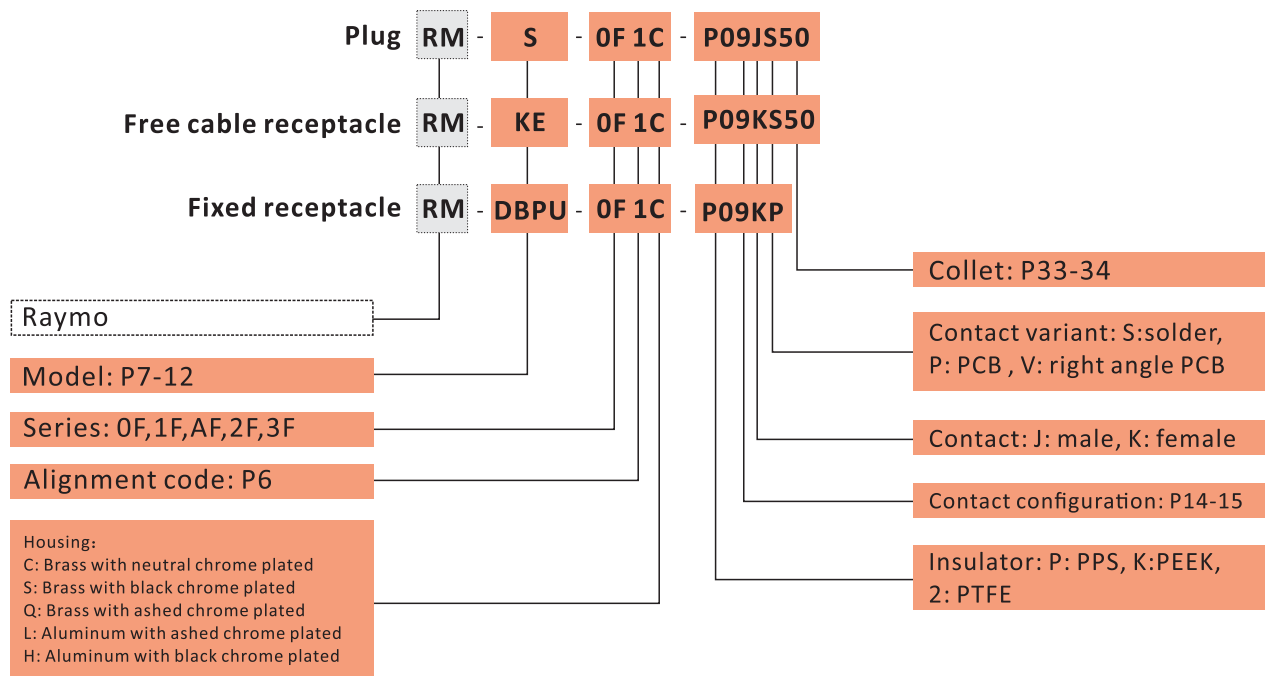

Part No.Example

Straight plug with cable collet

RM-S-0F1C-P09JS50Z straight plug, 0F series, code 1, multipole 9 contacts, outer shell in natural chrome-plated brass, PPS insulator, male solder contacts, collet for 4.2-5.2 mm diameter cable with a black colour bend relief, IP68.

Free cable mount receptacle

RM-KE-0F1C-P09KS50 free cable receptacle ,0F series, code 1 multipole 9 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, collet for 4.2-5.2 mm diameter cable ,IP68.


Fixed receptacle

RM-DBPU-0F1C-P09KP fixed receptacle, nut fixing, 0F series, code 1, multipole 9 contacts,outer shell in natural chrome-plated brass, PPS insulator, female PCB contacts,IP68.

Part Section Showing Internal Components


Cable Mount Plug

- ① Conical Sleeve
- ② Male contact
- ③ Insulator
- ④ Fixed spacer
- ⑤ Latch sleeve
- ⑥ Outer shell
- ⑦ Split insert carrier A/B
- ⑧ Snap spring
- ⑨ EMI ring
- ⑩ O-ring

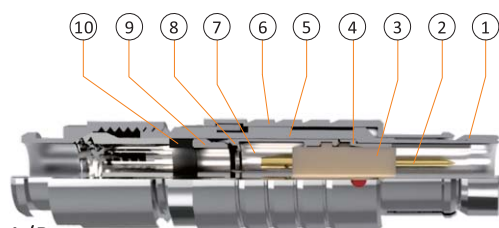

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inner o-ring
- ⑤ Fixed spacer
- ⑥ Insulator
- ⑦ Female contact

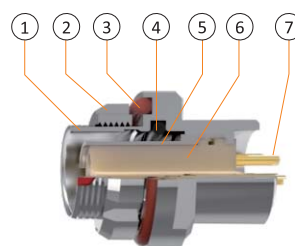

Technical Characteristics

Mechanical and Climatical




Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHZ	>95 dB	IEC 60619-1-3
	at 1 GHz	>80 dB	IEC 60619-1-3

Code Options


Code 1 is standard, if for other codes, please specify.



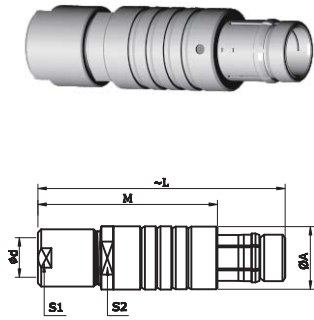


RM-S/SC Cable Mount Plug

Reference		Dimensions(mm)						
Model	Series	A	M	L	d max		S1	S2
					shielded clamp	sealed clamp		
RM-S/SC	0F	9.4	26	37.2	4.7	4.3	8	8
RM-S/SC	1F	12	34	45	6.7	6.2	9	10
RM-S/SC	AF	13	36	46	7.2	6.7	12	11
RM-S/SC	2F	15	36	48	8.7	8.7	13	13

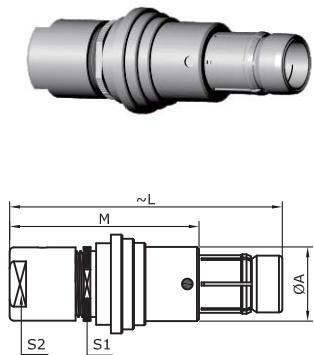


RM-SS/SSC Cable Mount Short Plug

Reference		Dimensions(mm)						
Model	Series	A	L	M	d max		S1	S2
					shielded clamp	sealed clamp		
RM-SS/SSC	0F	9	33	23	4.7	4.3	8	7
RM-SS/SSC	1F	12	37	26	6.7	6.2	11	12
RM-SS/SSC	AF	12.3	40	30	7.2	6.7	11.5	12
RM-SS/SSC	2F	15	43	31	8.7	8.7	13	13

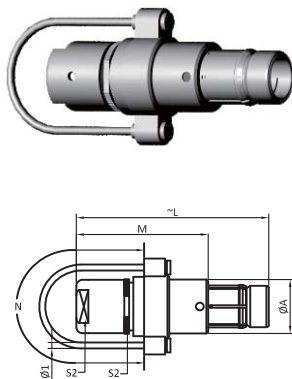


RM-FS7 Cable Mount Plug with lanyard

Reference		Dimensions(mm)							
Model	Series	A	L	M	N	d max		S1	S2
						shielded clamp	sealed clamp		
RM-FS7	0F	9	33	23	60	4.7	4.3	8	8
RM-FS7	1F	12	37	26	80	6.7	6.2	11	12
RM-FS7	AF	12.3	40	30	80	7.2	6.7	11.5	12
RM-FS7	2F	15	43	31	100	8.7	8.7	13	13

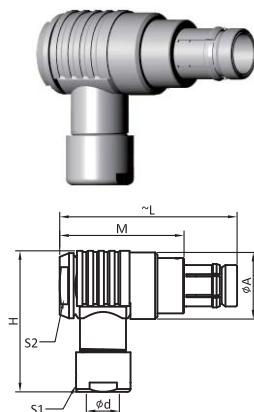


RM-WSO Elbow Right-angle Cable Mount Plug

Reference		Dimensions(mm)							
Model	Series	A	L	M	H	d max		S1	S2
						shielded clamp	sealed clamp		
RM-WSO	0F	12	33	23	25	4.7	4.3	7	8
RM-WSO	1F	15	38	28.7	31	6.7	6.2	10	11
RM-WSO	AF	17	40	30	33	7.2	6.7	12	12
RM-WSO	2F	19	45	33	37	8.7	8.7	13	14

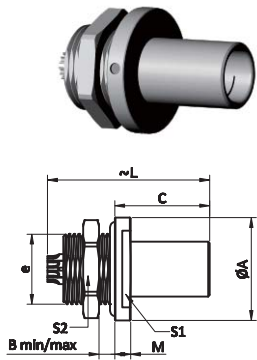


RM-SFE/SFU Fixed Sealed Panel Mount Plug

Reference		Dimensions(mm)								
Model	Series	A	B	C	e	L	M	S1	S2	
RM-SFE/SFU	0F	13	0/2.5	13.0	M9*0.5	21	3.0	11	11	
RM-SFE/SFU	1F	17	0/5.0	14.0	M12*1.0	26	3.0	14	14	
RM-SFE/SFU	AF	19	0/4.0	13.7	M14*1.0	26.5	3.7	17	14	
RM-SFE/SFU	2F	22	0/7.5	15.0	M16*1.0	28	3.0	19	19	

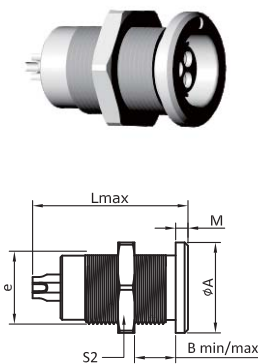


RM-D Panel Mount Receptacle

Reference		Dimensions(mm)						
Model	Series	A	B	e	L	M	S2	
RM-D	0F	11	0/9	M9*0.5	18.9	1.5	11	
RM-D	1F	14	0/8	M12*1.0	23.9	1.5	14	
RM-D	AF	16	0/10	M14*1.0	23.3	2	17	
RM-D	2F	19	0/11	M15*1.0	25.8	2.2	17	

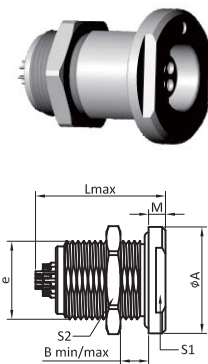

RM-DEE Hermetic Panel Mount Receptacle, Nut fixing

Reference		Dimensions(mm)							
Model	Series	A	B	e	L	M	S1	S2	
RM-DEE	0F	14	8/10	M9*0.5	20	2.5	11	11	
RM-DEE	1F	18	0/12	M14*1.0	23.9	3.0	14	17	
RM-DEE	AF	19	0/12	M14*1.0	23.3	3.0	15	17	
RM-DEE	2F	20	0/13	M16*1.0	25.8	4.0	17	19	

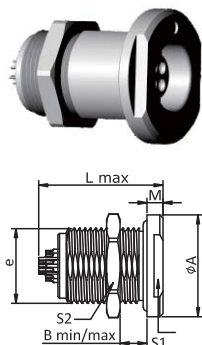


RM-DEU Sealed Panel Mount Receptacle, Nut fixing

Reference		Dimensions(mm)							
Model	Series	A	B	e	L	M	S1	S2	
RM-DEU	0F	14	8/10	M9*0.5	20	2.5	11	11	
RM-DEU	1F	18	0/12	M14*1.0	23.9	3.0	14	17	
RM-DEU	AF	19	0/12	M14*1.0	23.3	3.0	15	17	
RM-DEU	2F	20	0/13	M16*1.0	25.8	4.0	17	19	




RM-DBP Fixed Panel Mount Receptacle



Reference		Dimensions(mm)						
Model	Series	A	B	P	E	e	L	S1
RM-DBP	0F	12	0/3.5	6.5	10	M9*0.5	20	10
RM-DBP	1F	15	0/4.0	8.0	12	M12*1.0	23	-
RM-DBP	AF	18	0/3.0	7.0	13	M14*1.0	23	-
RM-DBP	2F	16	0/5.0	9.0	11.5	M15*1.0	26	-




RM-DBPC Panel Mount Receptacle, in elbow 90° pcb type



Reference		Dimensions(mm)							
Model	Series	A	B	e	L	P	S1	S2	
RM-DBPC	0F	12	14	M9*0.5	19.2	6.5	8.2	11	
RM-DBPC	1F	18	18	M14*1.0	24.8	8	12.5	15	
RM-DBPC	AF	18	19	M14*1.0	23.1	7	12	15	
RM-DBPC	2F	20.8	21	M16*1.0	24.2	8	14.3	16	




RM-DBPE Hermetic Panel Mount Receptacle




Reference		Dimensions(mm)							
Model	Series	A	B	e	L	P	S1	S2	
RM-DBPE	0F	12	14	M9*0.5	19.2	6.5	8.2	11	
RM-DBPE	1F	18	18	M14*1.0	24.8	8	12.5	15	
RM-DBPE	AF	18	19	M14*1.0	23.1	7	12	15	
RM-DBPE	2F	20.8	21	M14*1.0	24.2	8	14.3	16	



RM-DBPU Sealed Panel Mount Receptacle




Reference		Dimensions(mm)							
Model	Series	A	B	e	L	P	S1	S2	
RM-DBPU	0F	12	14	M9*0.5	19.2	6.5	8.2	11	
RM-DBPU	1F	18	18	M14*1.0	24.8	8	12.5	15	
RM-DBPU	AF	18	19	M14*1.0	23.1	7	12	15	
RM-DBPU	2F	20.8	21	M14*1.0	24.2	8	14.3	16	




RM-DBPLE Fixed Front Hermetic Mount Receptacle

Reference		Dimensions(mm)									
Model	Series	A	B	C	e	L	D	M	S1	S2	
RM-DBPLE	0F	13	0/4.5	10	M10*0.5	17	14	3.5	11	11	
RM-DBPLE	1F	28	0.5.0	17.5	M14*1.0	24	18	4.5	15	15	
RM-DBPLE	AF	20	0/5.5	16.5	M15*1.0	23	19	4.5	17	15	
RM-DBPLE	2F	20	0/6.5	17	M16*1.0	27	22	5.0	17	17	




RM-DBPLU Fixed Sealed Front Mount Receptacle

Reference		Dimensions(mm)									
Model	Series	A	B	C	e	L	D	M	S1	S2	
RM-DBPLU	0F	13	0/4.5	10	M10*0.5	17	14	3.5	11	11	
RM-DBPLU	1F	28	0.5.0	17.5	M14*1.0	24	18	4.5	15	15	
RM-DBPLU	AF	20	0/5.5	16.5	M15*1.0	23	19	4.5	17	15	
RM-DBPLU	2F	20	0/6.5	17	M16*1.0	27	22	5.0	17	17	



RM-DBEE Front Hermetic Panel Mount Receptacle

Reference		Dimensions(mm)								
Model	Series	A	B	C	e	L	M	S1	S2	
RM-DBEE	0F	11	0/3.5	10.2	M9*0.5	20	2.5	11	11	
RM-DBEE	1F	14	0/4.0	13.0	M14*1.0	23.9	3.0	14	14	
RM-DBEE	AF	19	0/4.0	12.0	M14*1.0	23.3	3.0	15	14	
RM-DBEE	2F	21.8	0/3.5	16.0	M16*1.0	25.8	4.0	17	19	




RM-DBEU Sealed Front Panel Mount Receptacle

Reference		Dimensions(mm)								
Model	Series	A	B	C	e	L	M	S1	S2	
RM-DBEU	0F	11	0/3.5	10.2	M9*0.5	20	2.5	11	11	
RM-DBEU	1F	14	0/4.0	13.0	M14*1.0	23.9	3.0	14	14	
RM-DBEU	AF	19	0/4.0	12.0	M14*1.0	23.3	3.0	15	14	
RM-DBEU	2F	21.8	0/3.5	16.0	M16*1.0	25.8	4.0	17	19	




RM-FG8 Sealed Panel Mount Receptacle



Reference		Dimensions(mm)							
Model	Series	A	B	e	L	P	S1	S2	
RM-FG8	0F	12	14	M9*0.5	19.2	6.5	8.2	11	




RM-FGX Sealed Panel Mount Receptacle only for 0F series



Reference		Dimensions(mm)							
Model	Series	A	B	e	L	P	S1	S2	
RM-FGX	0F	12	13	M9*0.5	15.7	6.5	8.2	11	




RM-FGD Panel Mount Receptacle, nut fixing




Reference		Dimensions(mm)							
Model	Series	A	B	e	L	M	S1	S2	
RM-FGD	0F	11	12	M9*0.5	15.7	6.5	8.2	11	



RM-KE Sealed Cable Mount Receptacle

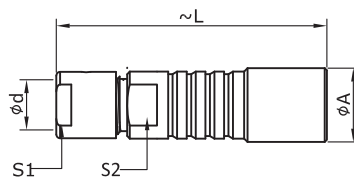


Reference		Dimensions(mm)							
Model	Series	A	L	d max		S1	S2		
				shielded clamp	sealed clamp				
RM-KE	0F	10	36	4.7	4.3	7	7		
RM-KE	1F	13	43	6.7	6.2	10	10		
RM-KE	AF	13.5	45	7.2	6.7	12	11		
RM-KE	2F	16	48	8.7	8.7	13	12		

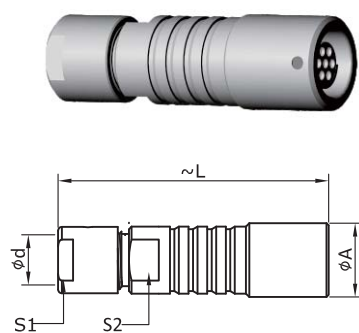


RM-K Cable Mount Receptacle

Reference		Dimensions(mm)					
Model	Series	A	L	d max		S1	S2
				shielded clamp	sealed clamp		
RM-K	0F	10	36	4.7	4.3	7	7
RM-K	1F	13	43	6.7	6.2	10	10
RM-K	AF	13.5	45	7.2	6.7	12	11
RM-K	2F	16	48	8.7	8.7	13	12

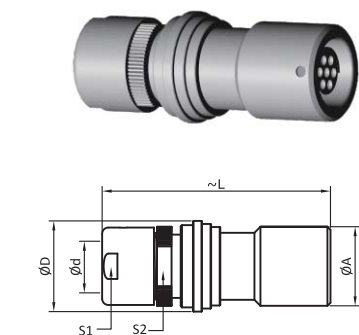


RM-KSE Short Sealed Cable Mount Receptacle

Reference		Dimensions(mm)					
Model	Series	A	L	M	d max	S1	S2
RM-KSE	0F	10	32	23	3.8	8	8
RM-KSE	1F	13	37	26	6.0	11	12
RM-KSE	AF	13.5	36	30	6.2	11.5	12
RM-KSE	2F	16	45	31	8.0	13	13

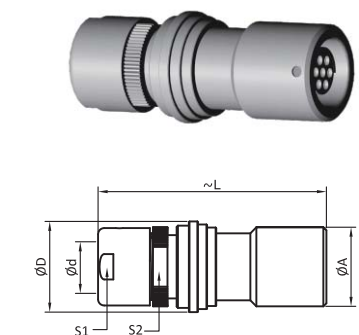

RM-KS Short Cable Mount Receptacle




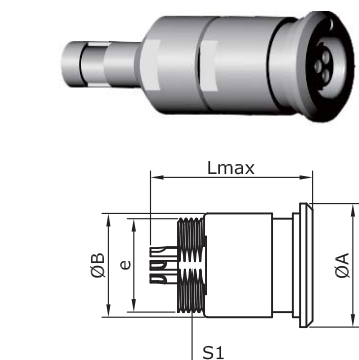







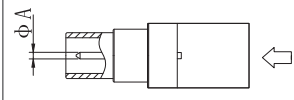

Reference		Dimensions(mm)					
Model	Series	A	L	M	d max	S1	S2
RM-KS	0F	10	32	23	3.8	8	8
RM-KS	1F	13	37	26	6.0	11	12
RM-KS	AF	13.5	36	30	6.2	11.5	12
RM-KS	2F	16	45	31	8.0	13	13



RM-PGX Cable Mount Receptacle only used by overmoulding

Reference		Dimensions(mm)				
Model	Series	A	B	e	L	S1
RM-PGX	0F	12	10	M9*0.5	15.5	8.2
RM-PGX	1F	16	14	M12*0.6	24.8	9.0
RM-PGX	AF	16	14	M12*0.6	23.1	10
RM-PGX	2F	18	16	M14*0.6	24.2	12

Insulator Configuration

											
		Code	Ohm(Ω)	Contact diameter	Contact No.	Contact max. diameter	Insert max. diameter	Voltage standing-wave ratio VSWR(F=GHz)	Test voltage(kv/rms)	Current rate (A)	
0F			250	50	0.9	50	0.95	2.95	1.09 +0.11f	3.0	6
			275	75	0.7	75	1.05	3.95	1.02 +0.25f	2.4	3
1F			250	50	1.6	50	1.35	3.95	1.01 +0.23f	3.0	12
			275	75	1.3	75	1.05	3.95	1.02 +0.08f	2.4	10
2F			250	50	2.0	50	1.75	5.95	1.01 +0.95f	3.0	15
			275	75	1.6	75	1.35	5.95	1.02 +0.03f	1.5	12

- First choice alternative
- Special order alternative

Insulator Configuration

			Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell)/v AC-rms	Test voltage(contact -contact)/k/v AC-rms	Rated current /A
0F			P02	2	0.9	●	●	●	1.30	1.05	9.2
			P03	3	0.9	●	●	●	1.20	0.90	8.2
			P04	4	0.7	●	●	●	0.85	0.70	5.5
			P05	5	0.7	●	●	●	1.00	0.70	5.2
			P07	7	0.5	●	●	●	0.80	0.70	2.0
			P09	9	0.5	●	●	●	0.60	0.50	1.7
1F			P02	2	1.3	●	●	●	1.50	1.35	13.0
			P03	3	1.3	●	●	●	1.30	1.55	12.0
			P04	4	0.9	●	●	●	1.35	1.45	7.0
			P05	5	0.9	●	●	●	1.25	1.15	6.8
			P06	6	0.7	●	●	●	1.05	1.2	5.2
			P07	7	0.7	●	●	●	0.95	1.05	5.0
			P08	8	0.7	●	●	●	0.95	1.15	3.8
			P10	10	0.5	●	●	●	0.90	1.50	2.5
			P12	12	0.5	●	●	●	0.80	1.2	2.0
			P14	14	0.5	●	●	●	0.80	1.20	2.0
			P16	16	0.5	●	●	●	0.80	1.25	1.5

● First choice alternative
○ Special order alternative

Insulator Configuration

				Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell)/v AC-rms	Test voltage(contact -contact)/v AC-rms	Rated current /A
AF				P10	10	0.7	●	●	●	1.40	1.50	4.5
				P12	12	0.5	●	●	●	1.40	1.50	4.2
				P15	2 13	1.3 0.5	●	●	●	1.50 1.20	1.35 0.90	12 2.5
				P19	19	0.5	●	●	●	1.20	0.90	2.5
2F				P02	2	1.6	●	○	○	1.80	2.20	20
				P03	3	1.6	●	○	○	1.6	2.0	18.0
				P04	4	1.3	●	○	○	1.80	2.20	12.0
				P06	6	0.9	●	○	○	1.7	2.0	6.5
				P08	8	0.9	●	○	○	1.50	1.50	6.20
				P09	1 8	1.3 0.9	● ●	○ ○	○ ○	2.40 1.40	2.20 1.50	12.0 6.0
				P16	16	0.7	●	○	○	1.0	1.50	4.0
				P19	19	0.7	●	○	○	0.80	1.20	3.50

- First choice alternative
- Special order alternative





RM-T Series

Metal Waterproof Push pull Self-Locking Connector

T series has same insulator and contact configuration to F series:

- *Secure high performance push pull Self-locking system*
- *Unique design with inside 1 code , 2 alignment Keys and polarized keying system to avoid cross-interface*
- *Sealed up to IP68 and Hermetic*
- *360° EMC shielded*
- *High pin density contributing to equipment miniaturization*
- *Robust and shock resistant designs*
- *Functional in a wide temperature range from -50°C to +250°C*
- *Available solder , PCB and right angle PCB contact*



RM-T series

Plugs



FSX



FS7

Receptacles



FGX



FG8




FGD



FGK

Part Numbering System

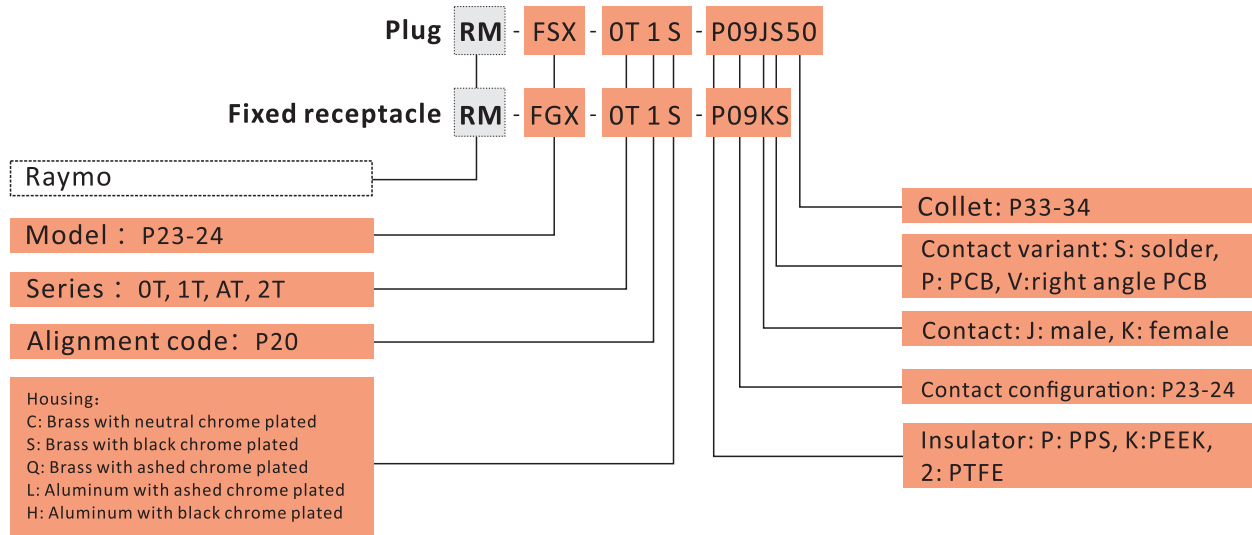

Part No. Example

Plug

RM-FSX-OT1S-P12JS50 straight plug, OT series, code 1, multipole 12 contacts, outshell in black chrome -plated brass, PPS insulator, male solder contacts, collet for 4.2-5.2mm diameter cable, IP68.


Fixed receptacle

RM-FGX-OT2C-P08KS fixed receptacle, OT series, code 2, multipole 8pin, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68.

Part Section Showing Internal Components


Cable Mount Plug

- ① Conical Sleeve
- ② Male contact
- ③ Insulator
- ④ Fixed spacer
- ⑤ Latch sleeve
- ⑥ Outer shell
- ⑦ Snap Spring
- ⑧ Split insert carrier A/B
- ⑨ Cable collet
- ⑩ Collet nut

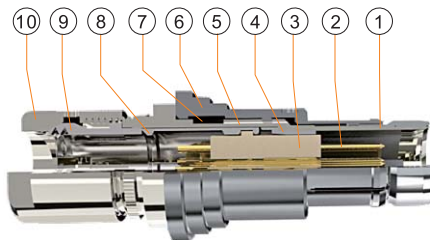

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inner o-ring
- ⑤ Fixed spacer
- ⑥ Insulator
- ⑦ Female contact

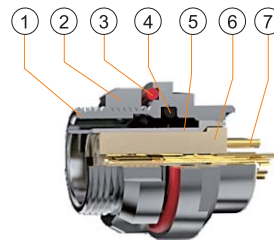

Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10MHZ	>95 dB	IEC 60619-1-3
	at 1GHZ	>80 dB	IEC 60619-1-3

Alignment Key and Polarized Keying System (T series)

Code 1 is standard, if for other codes, please specify.


Front view of receptacle



Code	Keys No.	Angles	Series				Contact Type	
			0T	1T	AT	2T	Plug	Receptacle
1	1	α	-	0°	0°	0°	Male	Female
2	2		-	30°	30°	30°	Male	Female
3	2		60°	45°	45°	45°	Male	Female
4	2		-	60°	60°	60°	Male	Female
5	2		90°	90°	90°	90°	Male	Female
1	1	γ	0°	-	-	-	Male	Female
2	2		30°	-	-	-	Male	Female
4	2		45°	-	-	-	Male	Female
6	2	δ	155°	-	-	-	Male	Female
6	2	β		155°	155°	155°	Male	Female




RM-FSX Cable Mount Plug

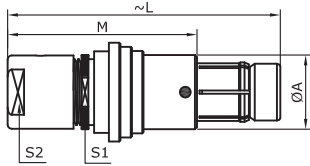

Reference		Dimensions(mm)					
Model	Series	A	L	M	S1	S2	
RM-FSX	0T	9	33	23	8	8	
RM-FSX	1T	12	37	26	11	12	
RM-FSX	AT	12.3	40	30	11.5	12	
RM-FSX	2T	15	43	31	13	13	




FS7 Cable Mount Plug, with layard

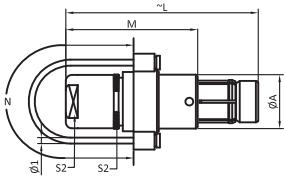

Reference		Dimensions(mm)							
Model	Series	A	L	M	N	d max		S1	S2
						shielded clamp	sealed clamp		
FS7	0T	9	33	23	60	4.7	4.3	8	8
FS7	1T	12	37	26	80	6.7	6.2	11	12
FS7	AT	12.3	40	30	80	7.2	6.7	11.5	12
FS7	2T	15	43	31	100	8.7	8.7	13	13




FGX Sealed Panel Mount Receptacle



Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
FGX	0T	12	13	M9*0.5	15.7	6.5	8.2	11




FG8 Panel Mount Receptacle, long shell body type



Reference		Dimensions(mm)							
Model	Series	A	B	e	L	P	S1	S2	
FG8	0T	12	14	M9*0.5	19.2	6.5	8.2	11	
FG8	1T	18	18	M14*1.0	24.8	8	12	15	
FG8	AT	18	19	M14*1.0	23.1	7	12	15	
FG8	2T	20.8	21	M14*1.0	24.2	8	14.2	16	




FGD Sealed Panel Mount Receptacle

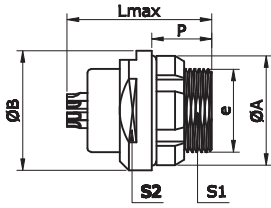

Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
FGD	0T	12	13	M9*0.5	15.7	6.5	8.2	11



FGK Sealed Panel Mount Receptacle















Reference		Dimensions(mm)								
Model	Series	A	B	C	e	L	D	M	S1	S2
FGK	0T	13	0/4.5	10	M10*0.5	17	14	3.5	11	11
FGK	1T	28	0/5.0	17.5	M14*1.0	24	18	4.5	15	15
FGK	AT	20	0/5.5	16.5	M15*1.0	23	19	4.5	17	15
FGK	2T	20	0/6.5	17	M16*1.0	27	22	5.0	17	17

Insulator Configuration

				Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell)/v AC-rms	Test voltage(contact -contact)/v AC-rms	Rated current /A
0T			P02	2	0.9	●	●	●	1.30	1.05	10.0	
			P03	3	0.9	●	●	●	1.20	0.90	8.0	
			P04	4	0.7	●	●	●	0.85	0.70	7.0	
			P05	5	0.7	●	●	●	1.00	0.70	6.5	
			P07	7	0.5	●	●	●	0.80	0.70	2.5	
			P09	9	0.5	●	●	●	0.60	0.50	2.0	
1T			P02	2	1.3	●	●	●	1.50	1.35	15.0	
			P03	3	1.3	●	●	●	1.30	1.55	12.0	
			P04	4	0.9	●	●	●	1.35	1.45	10.0	
			P05	5	0.9	●	●	●	1.25	1.15	9.0	
			P06	6	0.7	●	●	●	1.05	1.2	7.0	
			P07	7	0.7	●	●	●	0.95	1.05	7.0	
			P08	8	0.7	●	●	●	0.95	1.15	5.0	
			P10	10	0.5	●	●	●	0.90	1.50	2.5	
			P12	12	0.5	●	●	●	0.80	1.2	2.0	
			P16	16	0.5	●	●	●	0.80	1.25	1.5	

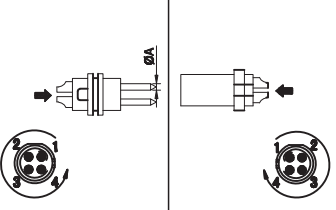- First choice alternative
- Special order alternative

Insulator Configuration

		Code	Contact No.	ØA (MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage (contact -shell)/v AC-rms	Test voltage (contact -contact)/v AC-rms	Rated current /A
AT		P10	10	0.7	●	●	●	1.40	1.05	4.5
		P12	12	0.5	●	●	●	1.40	1.50	4.2
		P15	2 13	1.3 0.5	● ●	● ●	● ●	1.50 1.20	1.35 0.90	12 2.5
		P19	19	0.5	●	●	●	1.20	0.90	2.5
2T		P02	2	1.6	●	○	○	1.80	2.20	20.0
		P03	3	1.6	●	○	○	1.60	2.0	18.0
		P04	4	1.3	●	○	○	1.80	2.20	12.0
		P06	6	0.9	●	○	○	1.70	2.0	6.50
		P08	8	0.9	●	○	○	1.50	1.50	6.20
		P16	16	0.7	●	○	○	1.0	1.50	4.0
		P19	19	0.7	●	○	○	0.80	1.20	3.50

● First choice alternative
○ Special order alternative



L Series

Metal Waterproof Push Pull Self-locking Connector

- *Secure high performance push pull self-locking system*
- *Sealed up to IP68 and hermetic*
- *Alignment keys and polarized keying system to avoid cross-interface*
- *360° EMC shielded*
- *High pin density contributing to equipment miniaturization*
- *Robust and shock resistant designs*
- *Functional in a wide temperature range from -50°C to +250°C*
- *Available solder , PCB and right angle PCB contact*



RM-L series

Plugs




FS2

Receptacles



FG8

Part Numbering System

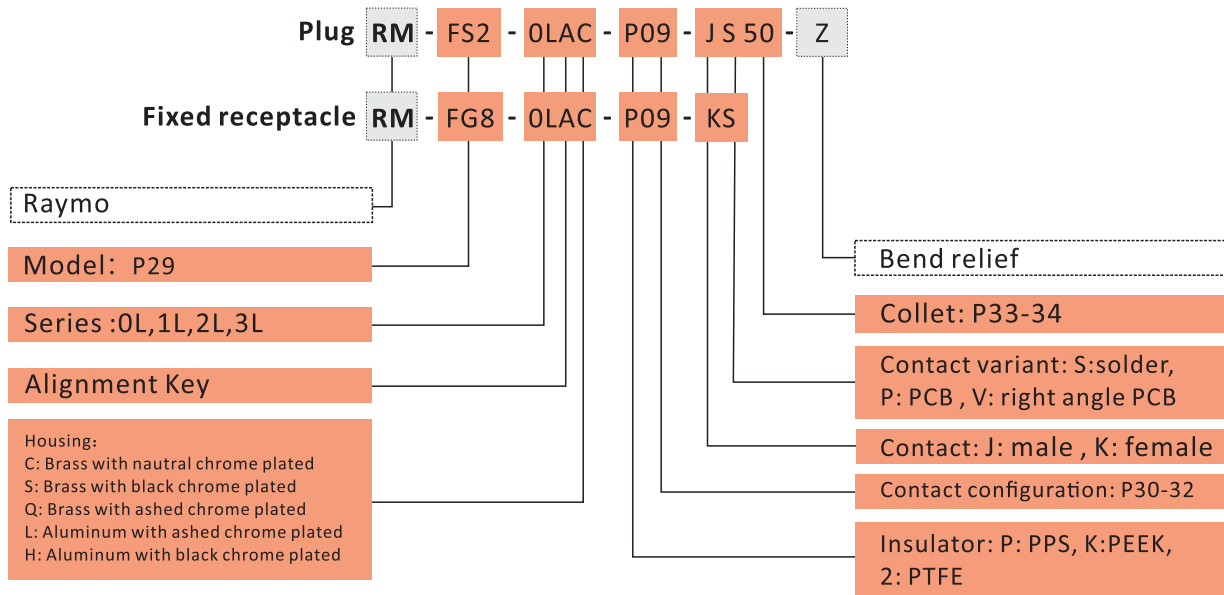

Part No.Example

Straight plug with cable collet

RM-FS2.0LAC.P09JS50Z straight plug, 0L series, key 2, 30 degree, multipole 9 contacts, outshell in natural chrome -plated brass, PPS insulator, male solder contacts, collet for 4.2-5.2mm diameter cable, IP68.


Fixed receptacle

RM-FG8-0LAC-P08KS fixed receptacle, 0L series, key 2, 30 degree, , multipole 8pin, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68.

Part Section Showing Internal Components


Cable Mount Plug

- ① Conial Sleeve
- ② Male contact
- ③ Insulator
- ④ Latch sleeve
- ⑤ Outer shell
- ⑥ Split insert carrier A/B
- ⑦ Snap Spring
- ⑧ Earthing ring
- ⑨ Cable collet
- ⑩ Collet nut

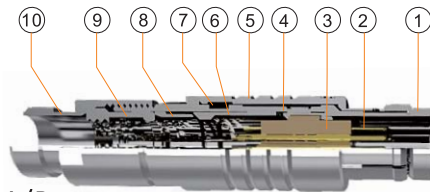

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inner o-ring
- ⑤ Retaining ring
- ⑥ Insulator
- ⑦ Female contact

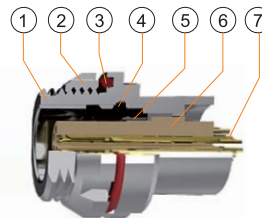

Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics	Value	Standard
Shielding efficiency	at 10MHZ	>95 dB
	at 1GHZ	>80 dB


Alignment key and Polarized Keys(RM-L series)

RM-L series connector model type are composed of five letters
The last letter indicated the key position and the contact type(male or female)

Front view of receptacle




Code	Keys No.	Angles	Series			Contact Type	
			0L	1L	2L	Plug	Receptacle
O	1	α	0°	0°	0°	Male	Female
A	2		30°	30°	30°	Male	Female
B	2		-	-	37.5°	Male	Female
C	2		-	-	45°	Male	Female
F	2		60°	60°	60°	Male	Female
H	2		-	-	75°	Male	Female
J	2		90°	90°	-	Male	Female
C	2	∞	45°	45°	-	Male	Female
M	2		-	-	100°	Male	Female
T	2		-	-	125°	Male	Female
V	2	δ	-	135°	-	Male	Female
Q	2		-	120°	120°		
W	2		-	-	145°		
Y	2	β	155°	155°	-		

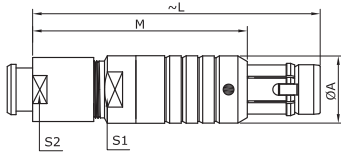

RM-FS2 Cable mount plug







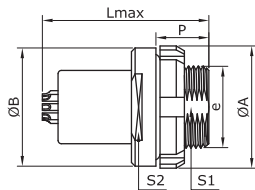

















Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FS2	0L	9.4	40	30	8	8
RM-FS2	1L	12	49	38	10	10
RM-FS2	2L	15	53	40	16	15



RM-FG8 Fixed receptacle, back panel mounting

Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FG8	0L	15	14.5	M14*1.0	20.5	6.5	6.5	6.5
RM-FG8	1L	18	18	M14*1.0	26	8	8	8
RM-FG8	2L	21	21	M16*1.0	29	6	6	6

Insulator Configuration

	solder male contact		solder female contact		Insulator	Contact No.	ϕ A (MM)	Contact type			Test voltage (contact -contact)k/v rms	Test voltage (contact -shell)k/v rms	Rated current /A
			Solder contact	PCB straight contact				PCB elbow contact					
0L			P02	2	0.9	●	●	●	1.30	1.05	10.0		
			P03	3	0.9	●	●	●	1.20	0.90	8.0		
			P04	4	0.7	●	●	●	0.85	0.70	7.0		
			P05	5	0.7	●	●	●	1.00	0.70	6.5		
			P06	6	0.5	●	●	●	0.85	0.65	2.5		
			P07	7	0.5	●	●	●	0.80	0.70	2.5		
			P09	9	0.5	●	●	○	0.60	0.50	2.0		
1L			P02	2	1.3	●	●	●	1.50	1.35	15.0		
			P03	3	1.3	●	●	●	1.30	1.55	12.0		
			P04	4	0.9	●	●	●	1.35	1.45	10.0		
			P05	5	0.9	●	●	●	1.25	1.15	9.0		





















- First choice alternative
- Special order alternative

Insulator Configuration

		solder male contact		solder female contact		Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A	
		Insulator	Contact No.	ϕ A (MM)	Solder contact	PCB straight contact	PCB elbow contact					
1L				P06	6	0.7	●	●	●	1.05	1.20	7.0
				P07	7	0.7	●	●	●	0.95	1.05	7.0
				P08	8	0.7	●	●	●	0.95	1.15	5.0
				P10	10	0.5	●	●	●	0.90	1.50	2.5
				P14	14	0.5	●	●	●	0.80	1.20	2.0
				P16	16	0.5	●	●	○	0.80	1.25	1.5
2L				P02	2	2.0	●	●	●	2.10	1.75	30.0
				P03	3	1.6	●	●	●	2.40	1.85	17.0
				P04	4	1.3	●	●	●	1.85	1.85	15.0
				P05	5	1.3	●	●	●	1.75	1.60	14.0
				P06	6	1.3	●	●	●	1.35	1.45	12.0
				P07	7	1.3	●	●	●	1.75	1.60	11.0

- First choice alternative
- Special order alternative

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ϕ A (MM)	Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
2L			P08	8	0.9	●	●	●	1.50	1.25	10.0
			P10	10	0.9	●	●	●	1.45	1.30	8.0
			P12	12	0.7	●	●	●	1.25	1.35	7.0
			P14	14	0.7	●	●	●	1.15	1.35	6.5
			P16	16	0.7	●	●	●	0.95	1.25	6.0
			P18	18	0.7	●	●	●	0.85	1.20	5.5
			P19	19	0.7	●	●	●	0.95	1.25	5.0
			P26	26	0.5	●	●	○	0.95	1.30	2.0
			P32	32	0.5	●	●	○	0.80	1.20	1.5

- First choice alternative
- Special order alternative

RM-L series Cable collet (Collet are same with RM-F series)

RM-0F-S



Shielded Cable Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
1.5 - 2.1	2.1	RM-0F-S-021	3.6 - 4.1	4.1	RM-0F-S-041
2.1 - 2.6	2.6	RM-0F-S-026	4.1 - 4.3	4.3	RM-0F-S-043
2.6 - 3.1	3.1	RM-0F-S-031	4.3 - 4.7	4.7	RM-0F-S-047
3.1 - 3.6	3.6	RM-0F-S-036			

RM-0F-E



Environmentally Sealed Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
1.5 - 2.1	2.1	RM-0F-S-021	3.6 - 3.6	3.6	RM-0F-S-036
2.1 - 2.6	2.6	RM-0F-S-026	3.6-4.1	4.1	RM-0F-S-041
2.6 - 3.1	3.1	RM-0F-S-031	4.1-4.3	4.3	RM-0F-S-043

RM-1F-S



Shielded Cable Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator	Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator
1.7-2.2	2.2	RM-1F-S-022	4.2-4.7	4.7	RM-1F-S-047
2.2-2.7	2.7	RM-1F-S-027	4.7-5.2	5.2	RM-1F-S-052
2.7-3.2	3.2	RM-1F-S-032	5.2-5.7	5.7	RM-1F-S-057
3.2-3.7	3.7	RM-1F-S-037	5.7-6.2	6.2	RM-1F-S-062
3.7-4.2	4.2	RM-1F-S-042	6.2-6.7	6.7	RM-1F-S-067


RM-1F-E



Environmentally Sealed Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator	Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator
1.7-2.2	2.2	RM-1F-E-022	4.2-4.7	4.7	RM-1F-E-047
2.2-2.7	2.7	RM-1F-E-027	4.7-5.2	5.2	RM-1F-E-052
2.7-3.2	3.2	RM-1F-E-032	5.2-5.7	5.7	RM-1F-E-057
3.2-3.7	3.7	RM-1F-E-037	5.7-6.2	6.2	RM-1F-E-062
3.7-4.2	4.2	RM-1F-E-042			


RM-L series Cable collet (Collet are same with RM-F series)

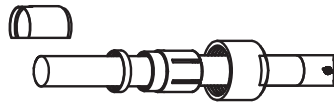

RM-AF-S

Shielded Cable Clamp Set


Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
2.2-2.7	2.7	RM-AF-S-027	4.7-5.2	4.7	RM-AF-S-052
2.7-3.2	3.2	RM-AF-S-032	5.2-5.7	5.7	RM-AF-S-057
3.2-3.7	3.7	RM-AF-S-037	5.7-6.2	6.2	RM-AF-S-062
3.7-4.2	4.2	RM-AF-S-042	6.2-6.7	6.7	RM-AF-S-067
4.2-4.7	4.7	RM-AF-S-047	6.7-7.2	7.2	RM-AF-S-072

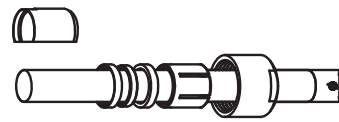

RM-AF-E

Environmentally Sealed Clamp Set


Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
2.2-2.7	2.7	RM-AF-E-027	4.7-5.2	4.7	RM-AF-E-052
2.7-3.2	3.2	RM-AF-E-032	5.2-5.7	5.7	RM-AF-E-057
3.2-3.7	3.7	RM-AF-E-037	5.7-6.2	6.2	RM-AF-E-062
3.7-4.2	4.2	RM-AF-E-042	6.2-6.7	6.7	RM-AF-E-067
4.2-4.7	4.7	RM-AF-E-047			

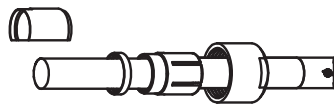

RM-2F-S

Shielded Cable Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
2.9-4.0	4.0	RM-2F-S-040	6.7-7.7	7.7	RM-2F-S-077
4.0-4.7	4.7	RM-2F-S-047	7.7-8.7	8.7	RM-2F-S-087
4.7-5.7	5.7	RM-2F-S-057	8.7-9.1	9.1	RM-2F-S-091
5.7-6.7	6.7	RM-2F-S-067			

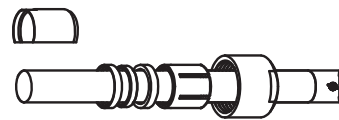

RM-2F-E

Environmentally Sealed Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator	Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator
2.9-4.0	4.0	RM-2F-E-040	5.7-6.7	6.7	RM-2F-E-067
4.0-4.7	4.7	RM-2F-E-047	6.7-7.7	7.7	RM-2F-E-077
4.7-5.7	5.7	RM-2F-E-057	7.7-8.7	8.7	RM-2F-E-087



RM-U Series

Metal Waterproof Push Pull Self-locking Connector

U series has same insulator and contact configuration as F series:

- *Secure high performance push pull self-locking system*
- *Compact design and light weight construction*
- *Sealed up to IP68 and hermetic*
- *3 codes alignment keys system to avoid cross-interface*
- *360° EMC shielded*
- *High pin density contributing to equipment miniaturization*
- *Robust and shock resistant designs*
- *Available solder, PCB and right angle PCB contact*



RM-U series

Plugs



FSX

Receptacles



FG2




FGK



FGX

Part Numbering System

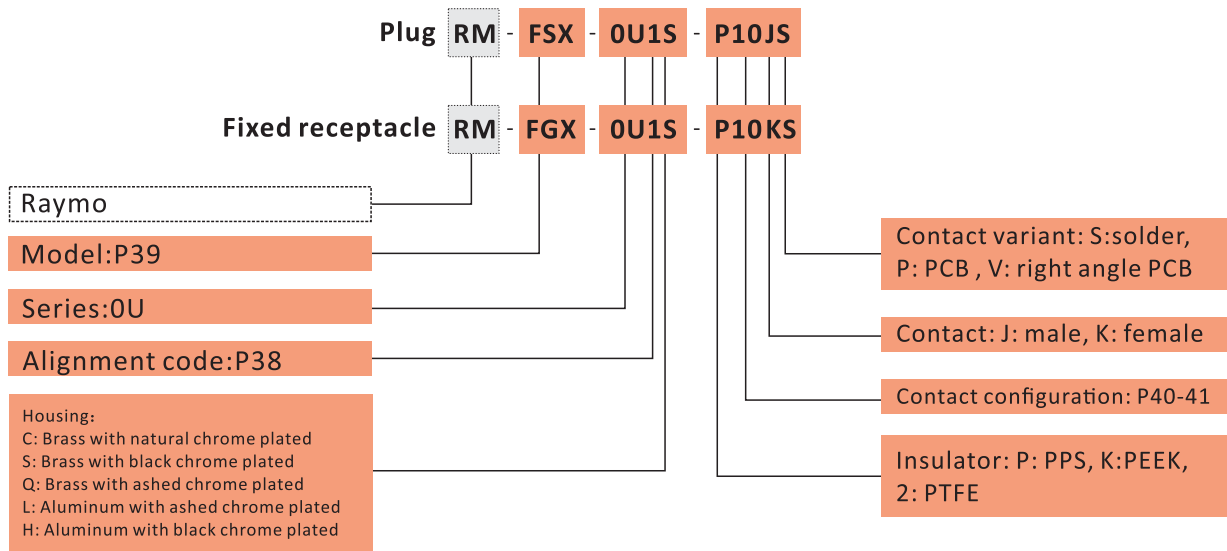

Part No.Example

Straight plug with cable collet

RM-FSX-0U1S-P10JS straight plug, 0U series, code 1, multipole 10 contacts, outer shell in black chrome -plated brass, PPS insulator, male solder contacts, IP68.


Fixed receptacle

RM-FGX-0U2C-P10KS fixed receptacle, 0U series, code 2, mulitpole 10 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68.

Part Section Showing Internal Components


Cable Mount Plug

- ① Inner shell
- ② Male contact
- ③ Insulator
- ④ Latch sleeve
- ⑤ Fixed spacer
- ⑥ Outer shell
- ⑦ Cable collet
- ⑧ EMI spacer
- ⑨ Collet nut

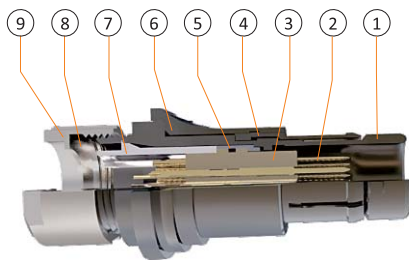

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inner o-ring
- ⑤ Fixed spacer
- ⑥ Insulator
- ⑦ Female contact

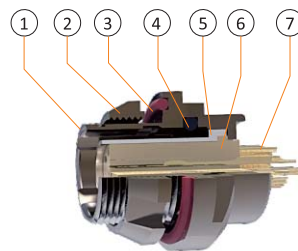

Technical Characteristics






Mechanical and Climatical





Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics	Value	Standard	
Shielding efficiency	at 10MHZ	>95 dB	IEC 60619-1-3
	at 1GHZ	>80 dB	IEC 60619-1-3

Alignment key

0U	Code	1	2	3	4	5
	Guide mark	•	▼	■	*	*
	Plug front view					

1U	Code	1	2	3	4
	Guide mark	•	▼	■	*
	Plug front view				

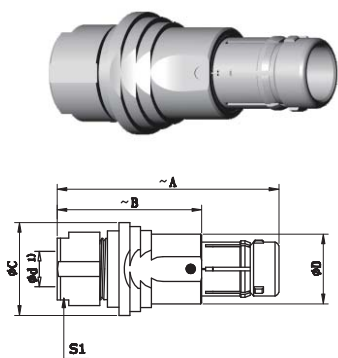


RM-FSX straight plug

Reference		Dimensions(mm)					
Model	Series	A	B	C	D	ϕd_{max}	S1
RM-FSX	0U	28.7	18.7	12	9	4.5	8
RM-FSX	1U	37.7	26.6	15	11	7	12




RM-FG2 Sealed Panel Mount Receptacle with ground tag

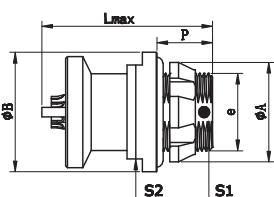

Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
F-FG2	0U	13	14	M9 *0.5	20	6.5	11	8




RM-FGK Sealed Panel Mount Receptacle, Straight PCB contacts

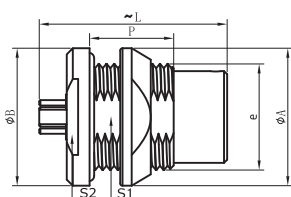

Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FGK	1U	18	18	M14 *1.5	24.6	11	12	15

































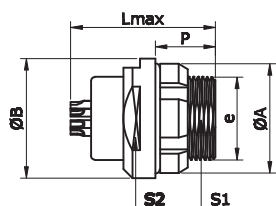RM-FGX Sealed Panel Mount Receptacle



















Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FGX	0U	12	13	M9*9.5	15.7	6.5	7.9	11

Insulator Configuration

				Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage (contact -shell)/k/v AC-rms	Test voltage (contact -contact)/k/v AC-rms	Rated current /A
00U			302	2	0.5	●	●	●	1.00	0.95	5.0	
			303	3	0.5	●	●	●	0.80	0.95	3.0	
			304	4	0.5	●	●	●	0.80	0.65	2.0	
0U			P02	2	0.9	●	●	●	1.70	1.30	9.2	
			P03	3	0.9	●	●	●	1.30	1.30	8.2	
			P04	4	0.7	●	●	●	1.20	1.20	5.5	
			P05	5	0.7	●	●	●	1.00	0.80	5.2	
			P07	7	0.5	●	●	●	1.00	0.80	2.0	
			P09	9	0.5	●	●	●	1.10	0.80	1.7	
			P10	10	0.5	●	●	●	0.90	0.80	1.3	
			P13	13	0.4	●	●	●	0.40	0.40	1.5	
	1U			P02	2	1.3	●	●	●	1.50	1.35	15.0
				P03	3	1.3	●	●	●	1.30	1.55	12.0
			P04	4	0.9	●	●	●	1.35	1.45	10.0	

- First choice alternative
- Special order alternative

Insulator Configuration

				Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell)/v AC-rms	Test voltage(contact -contact)/v AC-rms	Rated current /A
1U			P05	5	0.9	●	●	●	1.25	1.15	9.0	
			P06	6	0.7	●	●	●	1.05	1.2	7.0	
			P07	7	0.7	●	●	●	0.95	1.05	7.0	
			P08	8	0.7	●	●	●	0.95	1.15	5.0	
			P10	10	0.7	●	●	●	0.90	1.50	2.5	
			P12	12	0.5	●	●	●	0.80	1.2	2.0	
			P16	16	0.5	●	●	●	0.80	1.25	1.5	

- First choice alternative
- Special order alternative

Applications





RM-C Series

Advanced Miniature Small and Light Weight Connector

- *Secure high performance push pull self-locking system*
- *Compact design and light weight construction*
- *Sealed up to IP68 and hermetic*
- *The unique design of the contact core makes it safe and reliable in all environments*
- *5 different alignment keys and Polarized Keying System to avoid cross-interface*
- *Hermetic receptacle structure can be suitable for equipment requiring airtightness*
- *Robust and shock resistant designs*
- *360° EMC shielded*
- *Available solder, PCB and right angle PCB contact*



RM-AMC series

Plugs



FSX



FSE

Receptacles




FGK



FG8

Part Numbering System

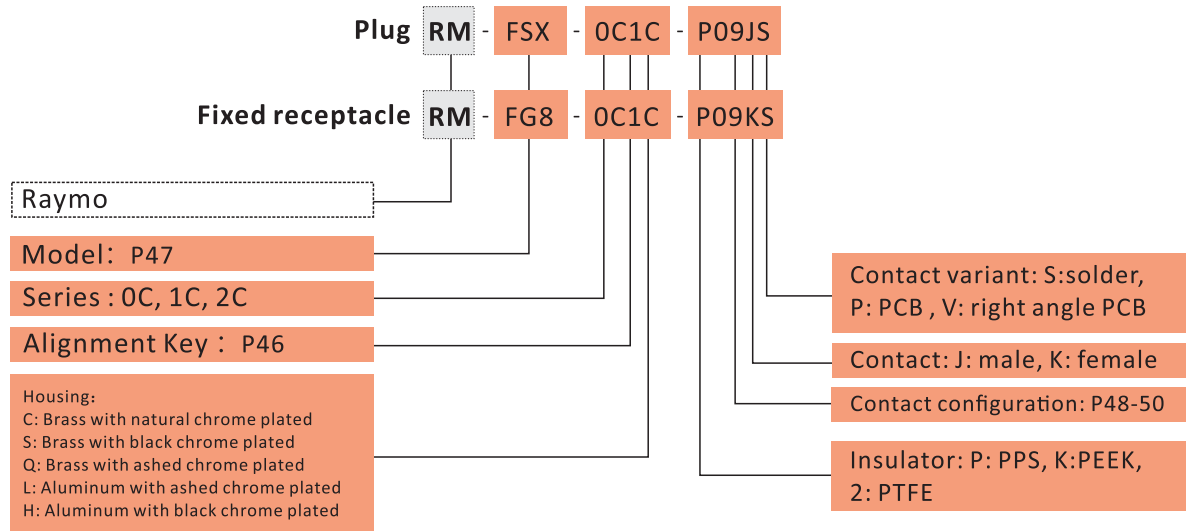

Part No.Example

Straight plug with cable collet

RM-FSX-0C1C-P09JS straight plug, 0C series, key 1, multipole 9 contacts, outer shell in black chrome -plated brass, PPS insulator, male solder contacts, IP68.


Fixed receptacle

RM-FG8-0C1C-P09KS fixed receptacle, 0C series, key 1, mulitpole 9 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68.

Part Section Showing Internal Components


Cable Mount Plug

- ① Inner shell
- ② Male contact
- ③ Insulator
- ④ Latch sleeve
- ⑤ Outer shell
- ⑥ O-ring
- ⑦ Collet nut
- ⑧ EMI ring

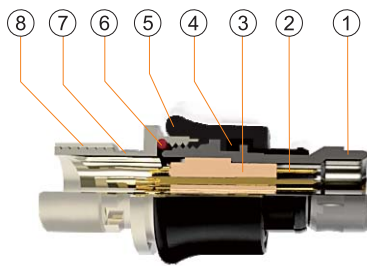

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inside o-ring
- ⑤ Fixed spacer
- ⑥ Insulator
- ⑦ Female contact

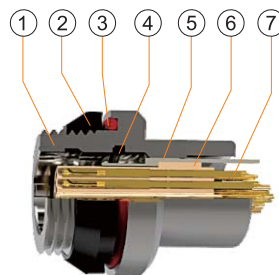

Technical Characteristics

Mechanical and Climatical


Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics	Value	Standard
Shielding efficiency	at 10MHZ	>95 dB
	at 1GHZ	>80 dB

Alignment Key


Key 1 is standard,if you need other keys,please indicated

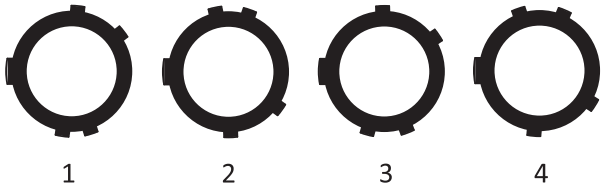

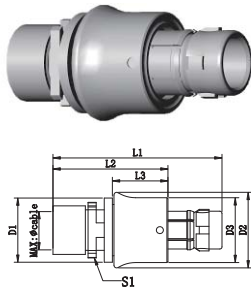


RM-FSX Cable mount plug

Reference		Dimensions(mm)								
Model	Series	L1	L2	L3	D1	D2	D3	S1	max cable diameter	
RM-FSX	0C	31.4	21.4	23	11.9	14	12	6.5	5.0	
RM-FSX	1C	33.2	22.4	26	13.9	15.9	13.9	8	6.5	
RM-FSX	AC	32.7	22.7	30	14.5	16.5	14.5	10	8.0	
RM-FSX	2C	35.2	23.2	31	17.6	19.6	17.6	12	10.0	

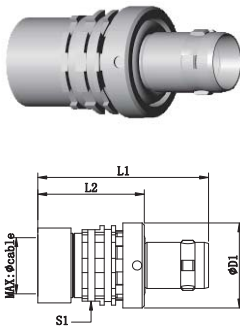


RM-FSE Cable mount plug

Reference		Dimensions(mm)					
Model	Series	L1	L2	D1	S1	max cable diameter	
RM-FSE	0C	9	33	23	8	5.0	
RM-FSE	1C	12	36	26	11	6.5	
RM-FSE	AC	12.3	33	23	11	8.0	
RM-FSE	2C	15	39	27	13	10.0	

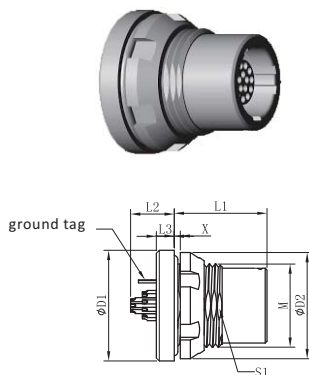

RM-FGK Sealed Panel Mount Receptacle
























Reference		Dimensions(mm)									
Model	Series	L1	L2	L3	X	D1	D2	D3	M	S1	
RM-FGK	0C	13.0	7.5	5.0	5	15.5	15.0	10.0	M11*0.5	10.1	
RM-FGK	1C	15.5	8.5	4.0	4	18.5	17.9	13.0	M14*1.0	13.1	
RM-FGK	AC	14.2	8.5	4.0	4	18.9	17.9	13.0	M14*1.0	13.1	
RM-FGK	2C	17.5	9.5	4.0	4	20.8	21.9	15.0	M16*1.0	15.1	

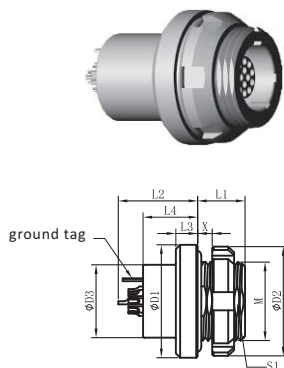

RM-FG8 Sealed Panel Mount Receptacle



























Reference		Dimensions(mm)									
Model	Series	L1	L2	L3	L4	X	D1	D2	D3	M	S1
RM-FG8	0C	6.5	15.5	3.0	11.5	8	15.5	15.0	10.0	M11*0.75	10.1
RM-FG8	1C	8.0	19.0	4.0	14.5	9	18.5	17.9	12.0	M14*1.0	13.1
RM-FG8	AC	7.0	17.7	2.5	12.5	11	18.9	17.9	14.0	M14*1.0	13.1
RM-FG8	2C	7.0	21.5	4.0	15.0	12	20.8	21.9	14.0	M16*1.0	15.1

Insulator Configuration

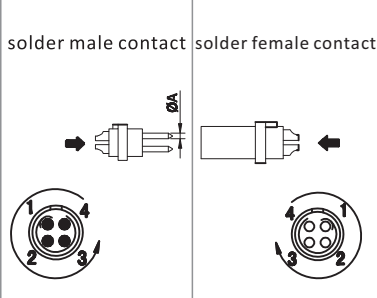					Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A		
solder male contact		solder female contact			Solder contact	PCB straight contact	PCB elbow contact					
		Insulator	Contact No.	ϕ A (MM)								
0C			P02	2	0.9	●	●	●	1.30	1.05	10.0	
			P03	3	0.9	●	●	●	1.20	0.90	8.0	
			P04	4	0.7	●	●	●	0.85	0.70	7.0	
			P05	5	0.7	●	●	●	1.00	0.70	6.5	
			P06	6	0.5	●	●	●	0.85	0.65	2.5	
			P07	7	0.5	●	●	●	0.80	0.70	2.5	
			P09	9	0.5	●	●	○	0.60	0.50	2.0	
	1C			P02	2	1.3	●	●	●	1.50	1.35	15.0
				P03	3	1.3	●	●	●	1.30	1.55	12.0
			P04	4	0.9	●	●	●	1.35	1.45	10.0	
			P05	5	0.9	●	●	●	1.25	1.15	9.0	





















- First choice alternative
- Special order alternative

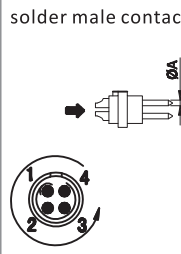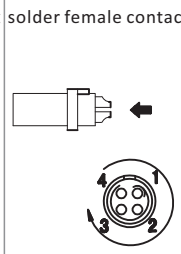Insulator Configuration

					Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A	
solder male contact	solder female contact	Insulator	Contact No.	ϕ A (MM)	Solder contact	PCB straight contact	PCB elbow contact				
											
1C			P06	6	0.7	●	●	●	1.05	1.20	7.0
			P07	7	0.7	●	●	●	0.95	1.05	7.0
			P08	8	0.7	●	●	●	0.95	1.15	5.0
			P10	10	0.5	●	●	●	0.90	1.50	2.5
			P14	14	0.5	●	●	●	0.80	1.20	2.0
			P16	16	0.5	●	●	○	0.80	1.25	1.5
2C			P02	2	2.0	●	●	●	2.10	1.75	30.0
			P03	3	1.6	●	●	●	2.40	1.85	17.0
			P04	4	1.3	●	●	●	1.85	1.85	15.0
			P05	5	1.3	●	●	●	1.75	1.60	14.0
			P06	6	1.3	●	●	●	1.35	1.45	12.0
			P07	7	1.3	●	●	●	1.75	1.60	11.0

- First choice alternative
- Special order alternative

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	φ A (MM)	Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
2C			P08	8	0.9	●	●	●	1.50	1.25	10.0
			P10	10	0.9	●	●	●	1.45	1.30	8.0
			P12	12	0.7	●	●	●	1.25	1.35	7.0
			P14	14	0.7	●	●	●	1.15	1.35	6.5
			P16	16	0.7	●	●	●	0.95	1.25	6.0
			P18	18	0.7	●	●	●	0.85	1.20	5.5
			P19	19	0.7	●	●	●	0.95	1.25	5.0
			P26	26	0.5	●	●	○	0.95	1.30	2.0
			P32	32	0.5	●	●	○	0.80	1.20	1.5

- First choice alternative
- Special order alternative



RM- G Series

Advanced Miniature Small and Light Weight Connector

- *Secure high performance in quick release system*
- *Compact design and light weight construction*
- *Sealed up to IP68 and hermetic*
- *The unique design of the contact core makes it safe and reliable in all environments*
- *5 different alignment keys and Polarized Keying System to avoid cross-interface*
- *Hermetic receptacle structure can be suitable for equipment requiring airtightness*
- *Robust and shock resistant designs*
- *360° EMC shielded*
- *Available solder, PCB and right angle PCB contact*



RM-AMC series

Plugs



FSE

Receptacles




FGK



PGX

Part Numbering System

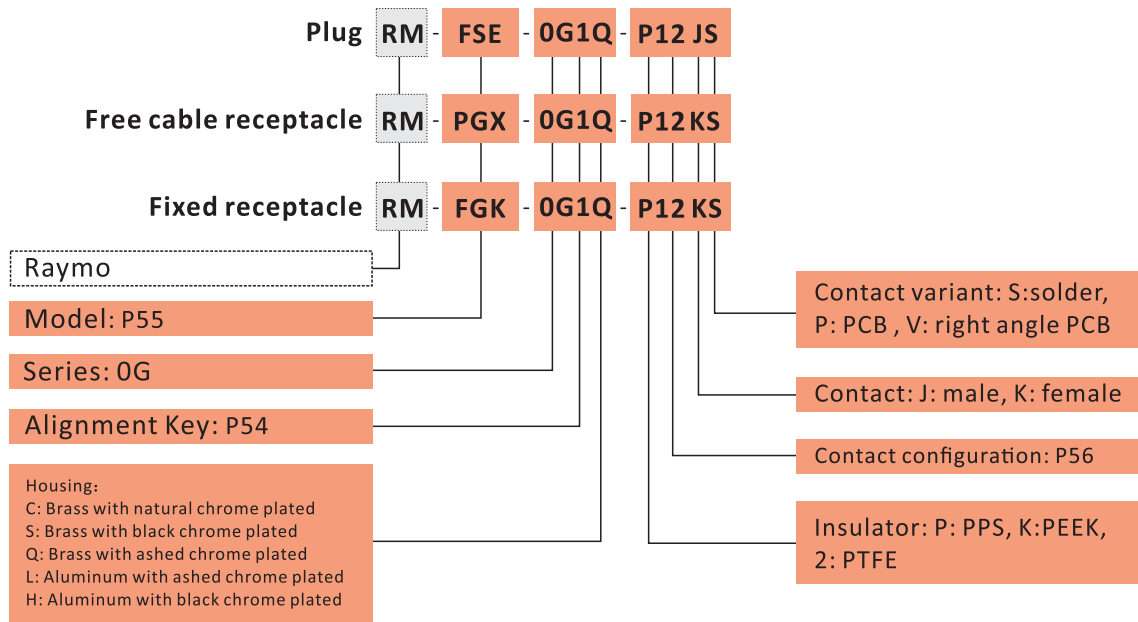

Part No.Example

Straight plug

RM-FSE-0G1Q-P12JS straight plug, 0G series, key 1, multipole 12 contacts, outer shell in gun chrome -plated brass, PPS insulator, male solder contacts, IP68.

Free receptacle

RM-PGX-0G1Q-P12KS free cable receptacle, 0G series, key 1, multipole 12 contacts, outer shell in gun chrome-plated brass, PPS insulator, female solder contacts, IP68.


Fixed receptacle

RM-FGK-0G1Q-P12KS fixed receptacle, 0G series, key 1, outer shell in gun chrome-plated brass, PPS insulator, female solder contacts, IP68.

Part Section Showing Internal Components


Straight Plug

- ① Outer shell
- ② Male contact
- ③ O-ring
- ④ Insulator
- ⑤ Retaining ring
- ⑥ Collet nut
- ⑦ EMI ring

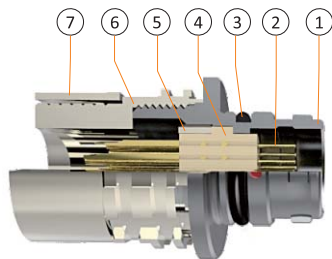

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Fixed spacer
- ④ O-ring
- ⑤ Insulator
- ⑥ Female contact
- ⑦ Ground tag

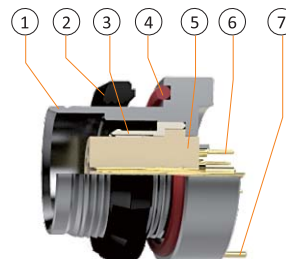

Technical Characteristics

Mechanical and Climatical


Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics	Value	Standard
Shielding efficiency	at 10MHZ	>95 dB
	at 1GHZ	>80 dB

Alignment Key


Key 1 is standard,if you need other keys,please indicated

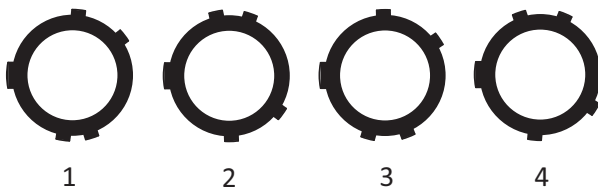

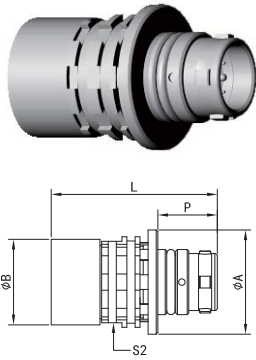


RM-FSE straight plug

Reference		Dimensions(mm)				
Model	Series	A	B	P	L	S2
RM-FSE	OG	12.8	10.5	7.3	20.4	10.0

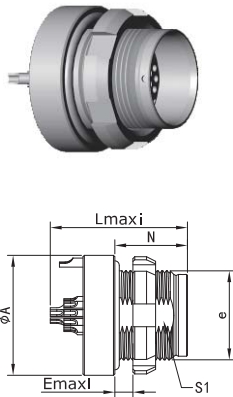


RM-FGK Sealed Back Panel Mount Receptacle with ground tag

Reference		Dimensions(mm)				
Model	Series	A	e	E	L	S1
RM-FGK	OG	12.8	M10 * 0.5	3.5	15.1	9.0

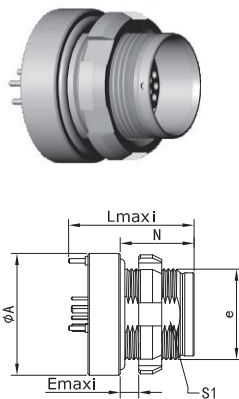

RM-FGK Sealed Back Panel Mount Receptacle straight PCB contacts, back panel mounting, with ground tag







Reference		Dimensions(mm)					
Model	Series	A	N	e	E	L	S1
RM-FGK	OG	12.8	8.0	M10 * 0.5	3.5	13.6	9.0

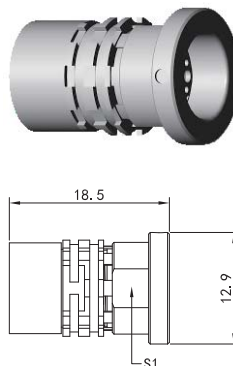

RM-PGX free cable receptacle

Reference		Dimensions(mm)		
Model	Series	A	N	S1
RM-PGX	OG	12.9	18.5	9.6

Insulator Configuration

		solder male contact	solder female contact									
				Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell)/v AC-rms	Test voltage(contact -contact)/v AC-rms	Rated current /A
0G			P12	2	0.7	●	●	●	1.00	0.95	5.0	
				P16	10	0.3	●	●	●	0.8	0.65	1.0

- First choice alternative
- Special order alternative



RM-B series

Metal Push Pull Self-locking Connector

- *Secure high performance push pull self-locking system*
- *High pin density contributing to equipment miniaturization*
- *Alignment Key and Polarized Keying System to avoid cross-interface*
- *360° EMC shielded*
- *Robust and shock resistant designs*
- *Functional in a wide temperature range from -50°C to +250°C*
- *Available solder , PCB and right angle PCB contact*



RM-B series

Plugs



FGG



FEG



FFG



FNG



FHG



FAG

Receptacles



EGG



ECG



ECG



EEG



EFG



EHG



HGG



HHG



HEG



RGG



PFG



PHG




EPG



EXG

Part Numbering System

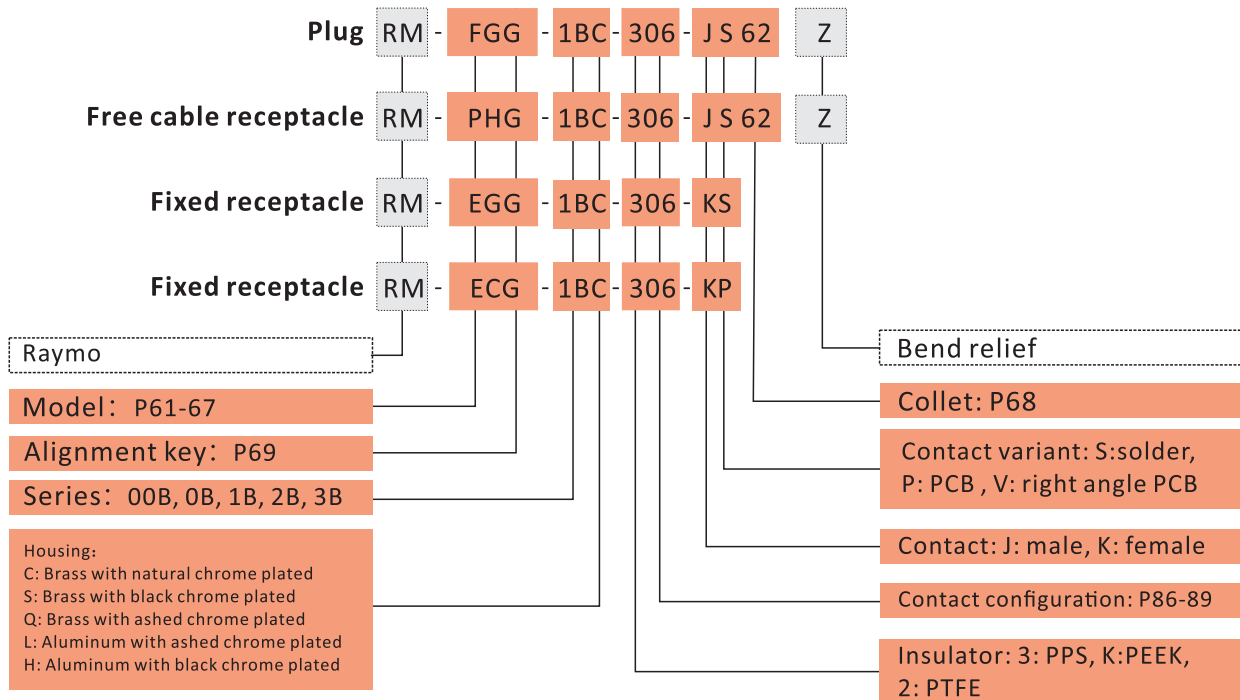

Part No.Example

Straight plug with cable collet

RM-FGG-1BC-306-JS62Z straight plug with key (G) and cable collet, 1B series, multipole 6 contacts, outer shell in natural chrome-plated brass, PPS insulator, male solder contacts, collet for 5.2-6.2mm diameter cable, nut for fitting a bend relief.

Free cable mount receptacle

RM-PHG-1BC-306-KS62 free cable receptacle with key (G) and cable collet, 1B series, multipole 6 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, collet for 5.2-6.2 mm diameter cable.


Fixed receptacle

RM-ECG-1BC-306-KP fixed receptacle with two screw nuts, nut fixing, with key (G), 1B series, multipole 6 contacts, outer shell in natural chrome natural-plated brass, PPS insulator, female PCB contacts.

Part Section Showing Internal Components


Cable Mount Plug

- ① Outer shell
- ② Latch sleeve
- ③ Insulator
- ④ Male contact
- ⑤ Split insert carrier A/B
- ⑥ Cable collet
- ⑦ Collet nut

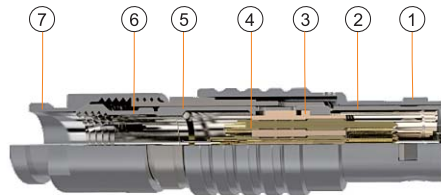

Fixed Receptacle

- ① Outer shell
- ② Retaining ring
- ③ Hexagonal nut
- ④ Locking washer
- ⑤ Insulator
- ⑥ Female contacts



Technical Characteristics


Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP50	IEC 60529
Climatical category	55/175/21	IEC 60068-1

Electrical


Characteristics		Value	Standard
Shielding efficiency	at 10MHZ	>75 dB	IEC 60619-1-3
	at 1GHZ	>40 dB	IEC 60619-1-3

RM-FGG Cable Mount Straight Plug, nut for fitting a bend relief

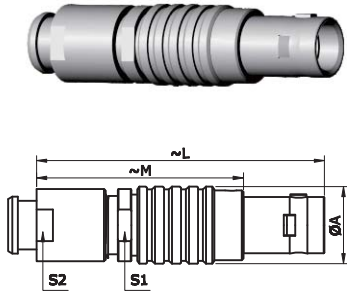


Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FGG	00	6.4	28.5	20	5.5	6.0
RM-FGG	0B	9.5	35.0	25.0	8.0	8.0
RM-FGG	1B	12.0	42.0	31.0	10.0	9.0
RM-FGG	2B	15.0	49.0	37.0	13.0	12.0
RM-FGG	3B	18.0	58.5	43.5	15.0	15.0

RM-FGG Cable Mount Straight Plug

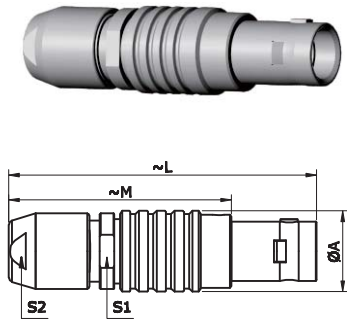


Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FGG	00	6.4	28.5	20.5	5.5	5.0
RM-FGG	0B	9.5	36.0	26.0	8.0	7.0
RM-FGG	1B	12.0	43.0	32.0	10.0	9.0
RM-FGG	2B	15.0	50.0	38.0	13.0	12.0
RM-FGG	3B	18.0	58.0	43.0	15.0	14.0

RM-FEG Cable Mount Straight Plug, front sealed, nut for fitting a bend relief

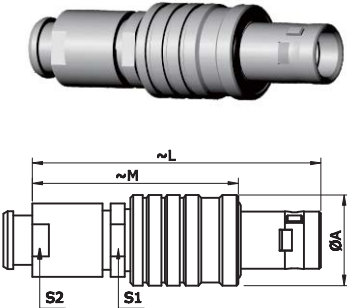


Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FEG	0B	11.0	35.0	25.0	8.0	8.0
RM-FEG	1B	13.5	42.0	33.0	10.0	9.0
RM-FEG	2B	16.5	48.0	36.0	13.0	12.0
RM-FEG	3B	19.0	56.0	41.5	15.0	15.0

RM-FNG Cable Mount Straight Plug, lanyard release

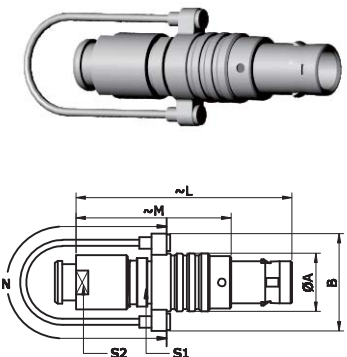


Reference		Dimensions(mm)						
Model	Series	A	B	L	M	N	S1	S2
RM-FNG	0B	9.5	15.95	34.62	24.3	140	8.0	8.0
RM-FNG	1B	12.0	18.0	43.0	32.0	140	10.0	9.0
RM-FNG	2B	15.0	21.0	49.0	37.0	160	13.0	12.0
RM-FNG	3B	18.0	25.0	58.0	43.0	190	15.0	14.0




RM-FHG Cable Mounted Elbow Plug, 90°

Reference		Dimensions(mm)							
Model	Series	A	D	H	L	M	S1	S2	S3
RM-FHG	0B	11.0	6.5	23.5	26.5	16.5	10.0	7.0	8.0
RM-FHG	1B	13.5	8.0	30.5	36.0	25.0	11.0	9.0	10.0
RM-FHG	2B	16.5	9.0	40.0	37.7	25.6	14.0	12.0	13.0
RM-FHG	3B	19.0	10.0	37.0	50.0	35.0	17.0	14.0	15.0




RM-FAG Panel Mount Fixed Plug, non-latching

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	N	S1	S3
RM-FAG	0B	10.0	12.4	M9*0.6	4.2	20.8	11.5	18.9	8.2	11.0
RM-FAG	1B	14.0	15.8	M12*1.0	5.4	25.2	12.5	21.6	10.5	14.0
RM-FAG	2B	18.0	19.2	M15*1.0	6.0	28.7	13.8	23.9	13.5	17.0
RM-FAG	3B	22.0	25.0	M18*1.0	5.8	32.1	17.0	30.2	16.5	22.0




RM-EGG Panel Mount Fixed Receptacle

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	N	S1	S3
RM-EGG	00B	8.0	10.2	M7*0.5	6.0	15.5	1.0	13.7	6.3	9.0
RM-EGG	0B	10.0	12.4	M9*0.6	7.0	20.7	1.2	19.1	8.2	11.0
RM-EGG	1B	14.0	15.8	M12*1.0	7.5	23.0	1.5	21.1	10.5	14.0
RM-EGG	2B	18.0	19.2	M15*1.0	8.5	26.7	1.8	24.6	13.5	17.0
RM-EGG	3B	21.8	25.0	M18*1.0	11.5	37.1	2.0	24.6	16.5	22.0




RM-ECG Panel Mount Receptacle with two screw nuts

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	N	S1	S3
RM-ECG	00B	10.0	10.2	M7*0.5	4.3	13.7	2.5	13.7	6.3	9.0
RM-ECG	0B	12.0	12.4	M9*0.6	5.5	20.7	2.5	16.4	8.2	11.0
RM-ECG	1B	16.0	15.8	M12*1.0	6.0	23.0	3.5	19.8	10.5	14.0
RM-ECG	2B	20.0	19.2	M15*1.0	6.5	26.7	3.5	20.2	13.5	17.0
RM-ECG	3B	24.0	25.0	M18*1.0	9.0	30.7	4.5	25.8	16.5	22.0

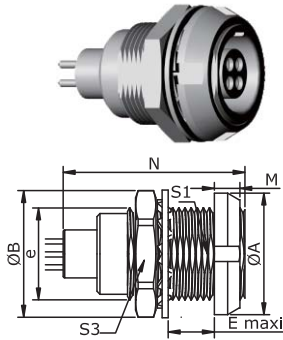


RM-ECG Panel Mount Receptacle with two screw nuts, straight contact for printed circuit

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	M	N	S1	S3	
RM-ECG	00B	10.0	10.2	M7*0.5	4.3	2.5	13.7	6.3	9.0	
RM-ECG	0B	12.0	12.4	M9*0.6	5.5	2.5	16.4	8.2	11.0	
RM-ECG	1B	16.0	15.8	M12*1.0	6.0	3.5	19.8	10.5	14.0	
RM-ECG	2B	20.0	19.2	M15*1.0	6.5	3.5	21.8	13.5	17.0	
RM-ECG	3B	24.0	25.0	M18*1.0	9.0	4.5	25.8	16.5	22.0	

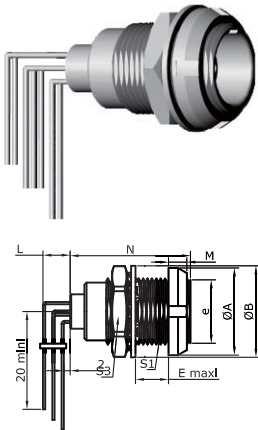


RM-ECG Panel Mount Fixed Receptacle with two screw nuts, elbow 90° contact for printed circuit

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	M	N	S1	S3	
RM-ECG	0B	12.0	12.4	M9*0.6	5.5	2.5	18.3	8.2	11.0	
RM-ECG	1B	16.0	15.8	M12*1.0	6.0	3.5	20.3	10.5	14.0	
RM-ECG	2B	20.0	19.2	M15*1.0	6.5	3.5	22.3	13.5	17.0	
RM-ECG	3B	24.0	25.0	M18*1.0	9.0	4.5	25.8	16.5	22.0	

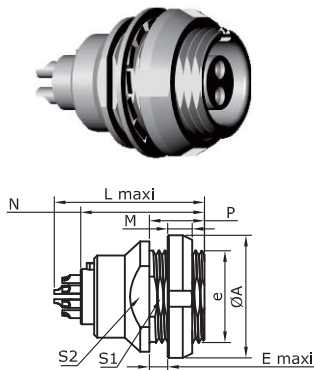


RM-EEG Panel Mount Fixed Receptacle, back panel mounting

Reference		Dimensions(mm)										
Model	Series	A	B	e	E	L	M	N	P	S1	S2	
RM-EEG	00B	10.0	9.5	M7*0.5	2.3	15.5	2.5	13.7	6.0	6.3	7.5	
RM-EEG	0B	12.0	12.5	M9*0.6	2.4	20.7	2.5	19.1	6.3	8.2	9.0	
RM-EEG	1B	16.0	16.0	M12*1.0	6.5	23.0	3.5	21.1	11.0	10.5	13.0	
RM-EEG	2B	20.0	20.0	M15*1.0	3.0	26.7	3.5	24.6	9.0	13.5	15.0	

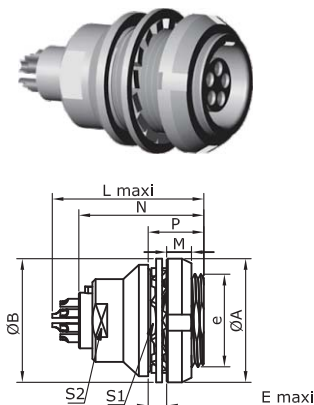


RM-EFG Panel Mount Fixed Receptacle, back panel mounting

Reference		Dimensions(mm)									
Model	Series	A	B	e	E	L	M	N	P	S2	
RM-EFG	0B	12.0	12.5	M9*0.6	5.5	20.7	2.5	19.1	9.0	8.0	




RM-EHG Panel Mount Fixed Receptacles, protruding shell

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	N	S1	S3
RM-EHG	0B	10.0	12.4	M9*0.6	2.0	19.5	12.5	19.1	8.2	11.0
RM-EHG	1B	14.0	15.8	M12*1.0	4.0	21.7	12.0	21.1	10.5	14.0
RM-EHG	2B	18.0	19.2	M15*1.0	5.1	22.7	12.5	24.6	13.5	17.0




RM-HGG Panel Mount Sealed Fixed Receptacle, front panel mounting

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	S1	S3	
RM-HGG	0B	13.0	12.4	M9*0.6	7.0	21.5	3.0	8.2	11.0	
RM-HGG	1B	18.0	15.8	M12*1.0	7.0	26.6	4.5	10.5	14.0	
RM-HGG	2B	20.0	19.2	M15*1.0	8.0	31.6	4.0	13.5	17.0	




RM-HHG Panel Mounted Sealed Fixed Receptacle, front panel mounting

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	S1	S3	
RM-HHG	0B	13.0	12.4	M9*0.6	7.0	23.2	4.8	8.2	11.0	
RM-HHG	1B	18.0	15.8	M12*1.0	7.0	30.3	5.2	10.5	14.0	
RM-HHG	2B	20.0	19.2	M15*1.0	8.0	35.6	6.0	13.5	17.0	




RM-HEG Panel Mount Sealed Fixed Receptacle, back panel mounting

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	P	S1	S3
RM-HEG	0B	12.0	13.0	M9*0.6	2.5	20.2	2.5	9.0	8.2	-
RM-HEG	1B	16.0	18.0	M12*1.0	5.5	26.6	3.5	11.0	10.5	-
RM-HEG	2B	20.0	20.0	M15*1.0	6.5	31.6	3.5	9.6	13.5	15.0

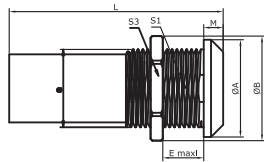


RM-RGG Fixed coupler, key (G) or kyes (A and J) at the flange and key (J,K or M) at the other end

Reference		Dimensions(mm)								
Model	Series	Contact	A	B	e	E	L	M	S1	S3
RM-RGG ¹⁾	0B	Female-Female	12.0	13.8	M10*0.75	8.0	34.0	2.0	9.0	12.0
RM-RGG ²⁾	0B	Female-Female	12.0	13.8	M10*0.75	8.0	43.0	2.0	9.0	12.0
RM-RJG	0B	Male-Female	12.0	13.8	M10*0.75	8.0	34.0	2.0	9.0	12.0
RM-RGJ		Female-Male								
RM-RAK		Female-Male								
RM-RGM		Female-Male								
RM-RGG ³⁾	1B	Female-Female	16.0	19.2	M14*1.00	8.5	47.0	2.5	12.5	17.0
RM-RJG	1B	Male-Female	16.0	19.2	M14*1.00	8.5	39.0	2.5	12.5	17.0
RM-RGJ		Female-Male								
RM-RJG	2B	Male-Female	20.0	21.5	M16*1.00	12.0	44.0	4.0	15.0	19.0
RM-RGJ		Female-Male								
RM-RGJ	3B	Female-Male	25.0	27.0	M20*1.00	32.0	53.0	4.0	18.5	24.0
RM-RGJ	4B	Female-Male	34.0	34.0	M25*1.00	50.0	65.0	4.0	23.5	30.0

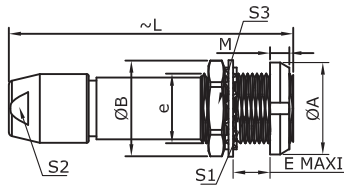


RM-PFG Panel Mount Cable Receptacle, back panel mounting

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	S1	S2	S3
RM-PFG	0B	12.0	12.4	M9*0.6	5.0	35.5	2.5	8.2	7.0	11.0
RM-PFG	1B	16.0	15.8	M12*1.0	5.0	40.7	3.5	10.5	9.0	14.0
RM-PFG	2B	20.0	19.2	M15*1.0	6.5	47.0	3.5	13.5	12.0	17.0
RM-PFG	3B	24.0	25.0	M18*1.0	9.0	56.0	4.5	16.5	14.0	22.0

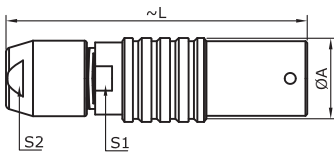

RM-PHG Cable Mount Receptacle


Reference		Dimensions(mm)			
Model	Series	A	L	S1	S2
RM-PHG	0B	9.5	35.5	8.0	7.0
RM-PHG	1B	12.5	40.5	10.0	9.0
RM-PHG	2B	16.5	47.0	13.0	12.0
RM-PHG	3B	19.0	56.0	15.0	14.0

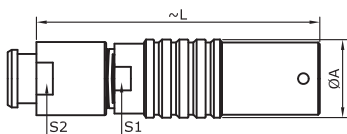

RM-PHG Cable Mount Receptacle, nut for fitting a bend relief

Reference		Dimensions(mm)			
Model	Series	A	L	S1	S2
RM-PHG	0B	9.5	35.5	8.0	8.0
RM-PHG	1B	12.5	40.5	10.0	9.0
RM-PHG	2B	16.5	47.0	13.0	12.0
RM-PHG	3B	19.0	56	15.0	14.0

Technical Characteristics

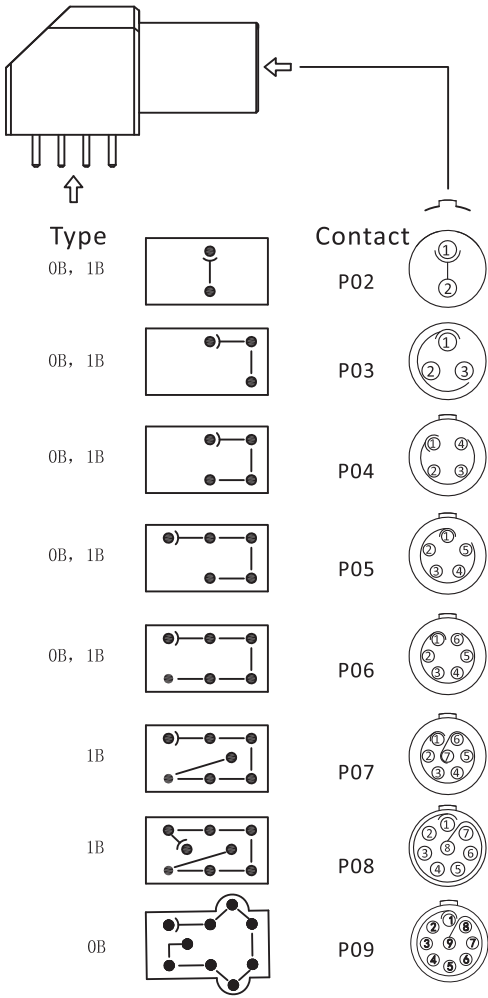


Electrical


Model	Shell Size	Contact No.	Test voltage (contact-shell)/k/v	Test voltage (contact-shell)/k/v	Rated current /A
RM-EPG-EXG	0B	302	1.45	1.20	4.5
RM-EPG-EXG	0B	303	1.70	1.60	4.5
RM-EPG-EXG	0B	304	1.30	1.10	4.5
RM-EPG-EXG	0B	305	1.25	1.20	4.5
RM-EPG-EXG	0B	306	1.25	1.20	2.5
RM-EPG-EXG	0B	307	1.00	1.20	2.0
RM-EPG-EXG	1B	302	1.70	1.45	4.5
RM-EPG-EXG	1B	303	1.60	1.85	4.5
RM-EPG-EXG	1B	304	1.70	1.80	4.5
RM-EPG-EXG	1B	305	1.30	1.55	4.5
RM-EPG-EXG	1B	306	1.35	1.45	4.5
RM-EPG-EXG	1B	307	1.45	1.45	2.0
RM-EPG-EXG	1B	308	1.30	1.30	2.0
RM-EPG	1B	314	1.00	1.30	1.0



RM-EPG Elbow (90°) Receptacle for printed circuit, key (G) or keys(A..F) (solder or screw fixing)

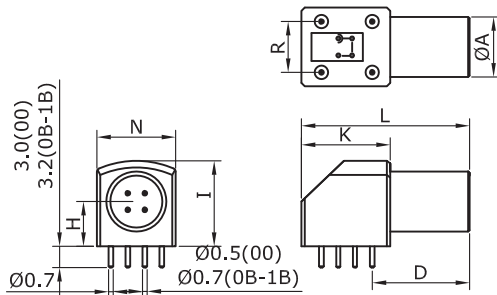


Model	Dimensions(mm)							
	A	D	H	I	K	L	N	R
RM-EPG-0BC-302KP	9.0	14.6	6.7	12.6	13.3	25.0	11.7	7.62
RM-EPG-0BC-303KP								
RM-EPG-0BC-304KP								
RM-EPG-0BC-305KP								
RM-EPG-0BC-306KP								
RM-EPG-0BC-307KP								
RM-EPG-1BC-302KP	11.0	16.6	7.5	14.0	13.3	27.0	12.6	7.62
RM-EPG-1BC-303KP								
RM-EPG-1BC-304KP								
RM-EPG-1BC-305KP								
RM-EPG-1BC-306KP								
RM-EPG-1BC-307KP								
RM-EPG-1BC-308KP								

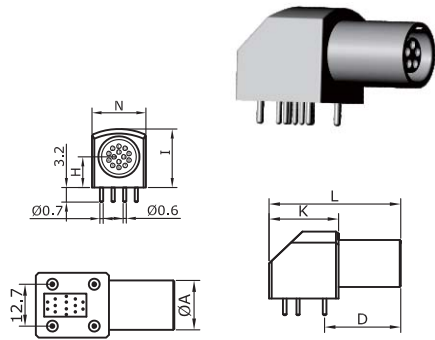

RM-EPG Elbow (90°) Receptacle for printed circuit (solder or screw fixing)


Model	Dimensions(mm)						
	A	D	H	I	K	L	N
RM-EPG-1BC-314KP	11	21	7.7	14.3	19	36	15.4

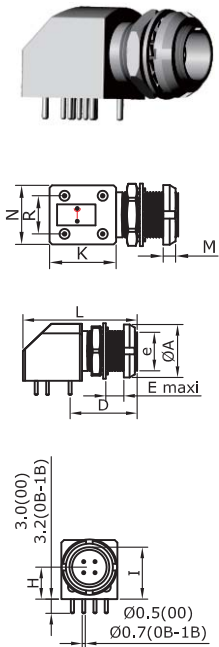

RM-EXG Elbow (90°) Receptacle for printed circuit, (solder or screw fixing) back panel mounting

Model	Dimensions(mm)												
	A	B	D	e	E	H	I	K	L	M	N	R	S3
RM-EXG-0BC-302KP	12	12.4	14.6	M9 * 0.6	6	6.7	12.6	13.3	25	2.5	11.7	7.62	11
RM-EXG-0BC-303KP													
RM-EXG-0BC-304KP													
RM-EXG-0BC-305KP													
RM-EXG-0BC-306KP													
RM-EXG-0BC-307KP													
RM-EXG-1BC-302KP	14	15	16.6	M11 * 0.5	7.5	7.5	14	13.3	27	3.5	12.6	7.62	13
RM-EXG-1BC-303KP													
RM-EXG-1BC-304KP													
RM-EXG-1BC-305KP													
RM-EXG-1BC-306KP													
RM-EXG-1BC-307KP													
RM-EXG-1BC-308KP													

RM-B series Cable collet



Cable Clamp Set		Cable collet (mm)	Cable dia Range	
type	code	φA	Max	Min
RM-CCT-00B-022	22	2.2	2.2	1.4
RM-CCT-00B-027	27	2.7	2.7	>2.2
RM-CCT-00B-035	35	3.5	3.5	>2.7

Cable Clamp Set		Cable collet (mm)	Cable dia Range	
type	code	φA	Max	Min
RM-CCT-0B-021	21	2.1	2.2	1.4
RM-CCT-0B-032	32	3.2	3.2	>2.2
RM-CCT-0B-042	42	4.2	4.2	>3.2
RM-CCT-0B-052	52	5.2	5.2	>4.2
RM-CCT-0B-056	56	5.6	5.6	>5.2 ①

Cable Clamp Set		Cable collet (mm)	Cable dia Range	
type	code	φA	Max	Min
RM-CCT-1B-042	42	4.2	4.2	2.5
RM-CCT-1B-052	52	5.2	5.2	>4.2
RM-CCT-1B-062	62	6.2	6.2	>5.2
RM-CCT-1B-072	72	7.2	7.2	>6.2
RM-CCT-1B-076	76	7.6	7.5	7.1 ①

Cable Clamp Set		Cable collet (mm)	Cable dia Range	
type	code	φA	Max	Min
RM-CCT-2B-042	42	4.2	4.2	>3.2
RM-CCT-2B-052	52	5.2	5.2	>4.2
RM-CCT-2B-062	62	6.2	6.2	>5.2
RM-CCT-2B-072	72	7.2	7.2	>6.2
RM-CCT-2B-082	82	8.2	8.2	>7.2
RM-CCT-2B-092	92	9.2	9.2	>8.2
RM-CCT-2B-099	99	9.9	9.7	9.1 ①

Cable Clamp Set		Cable collet (mm)	Cable dia Range	
type	code	φA	Max	Min
RM-CCT-3B-062	62	6.2	6.2	4.9
RM-CCT-3B-072	72	7.2	7.7	>6.2
RM-CCT-3B-082	82	8.2	8.0	7.1
RM-CCT-3B-092	92	9.2	9.2	>7.7
RM-CCT-3B-100	10	10.2	10.2	>9.2
RM-CCT-3B-110	11	11.2	11.0	10.2
RM-CCT-3B-120	12	11.9	11.7	11.1 ①


① This cable collet is only for crimping type cable collet, not fit for cable nut with bend relief type.

Alignment key and Polarized Keys(RM-B series)

RM-B series connector model type are composed of five letters.

The last letter indicates the key position and the contact type (male or female).

Front view of receptacle



Code	Keys No.	Angles	Series			Code	Keys No.	Angles	Series		Contact Type		
			00	0B	1B				2B	3B	Plug	Receptacle	
G	1		0°	0°	0°	G	1		0°	0°	Male	Female	
A	2	α	30°	30°	30°	A	2	α	30°	30°	Male	Female	
B	2		60°	60°	60°	B	2		45°	45°	Male	Female	
C	2		-	90°	90°	C	2		60°	60°	Male	Female	
D	2	β	-	135°	135°	D	2	γ	95°	95°	Male	Female	
E	2		-	145°	145°	E	2		β	120°	120°	Male	Female
F	2		-	155°	155°	F	2			145°	145°	Male	Female
J	2	γ	45°	45°	45°	J	2	α	37.5°	37.5°	Female	Male	
K	2		-	70°	70°	K	2		52.5°	52.5°	Female	Male	
L	2		-	80°	80°	L	2		γ	70°	70°	Female	Male
M	2	δ	-	110°	-	M	2	δ	-	-	Female	Male	

Applications





RM-K series

Metal Waterproof Push Pull Self-locking Connector

K series has same insulator and contact configuration as B series:

- *Secure high performance push pull self-locking system*
- *High pin density contributing to equipment miniaturization*
- *Alignment Key and Polarized Keying System to avoid cross-interface*
- *Sealed up to IP68*
- *360° EMC shielded*
- *Robust and shock resistant designs*
- *Functional in a wide temperature range from -50°C to +250°C*
- *Available solder , PCB and right angle PCB contact*



RM-K series

Plugs



FGG



FGG



FPG

Receptacles



EGG



EEG



EEG



HGG




PHG



PHG

Part Numbering System

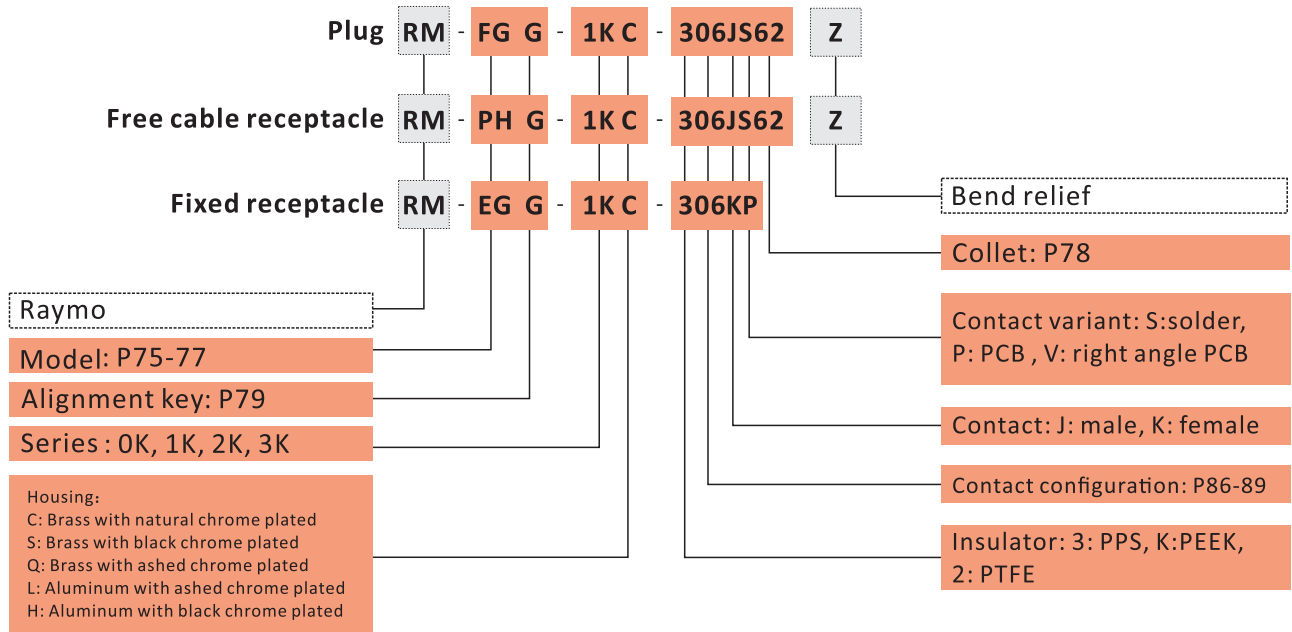

Part No.Example

Straight plug with cable collet

RM-FGG-1KC-303JS62Z straight plug with key (G) and cable collet, 1K series, multipole 3 contacts, outer shell in natural chrome-plated brass, PPS insulator, male solder contacts, collet for 5.2-6.2 mm diameter cable, with a black colour bend relief.

Free cable receptacle

RM-PHG-1KC-303KS62Z free cable receptacle (G) and cable collet, 1K series, multipole 3 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, collet for 5.2-6.2 mm diameter cable, with a black colour bend relief.


Fixed receptacle

RM-EGG-1KC-303KP fixed receptacle, nut fixing, with key (G), 1K series, multipole 3 contacts, outer shell in natural chrome plated brass, PPS insulator, female pcb contacts.

Part Section Showing Internal Components


Cable Mount Plug

- ① Outer shell
- ② Male contact
- ③ Latch sleeve
- ④ Insulator
- ⑤ Inner shell
- ⑥ Split insert carrier A/B
- ⑦ Retaining ring
- ⑧ Earthing cone
- ⑨ O-ring
- ⑩ Washer
- ⑪ Cable collet
- ⑫ Collet nut

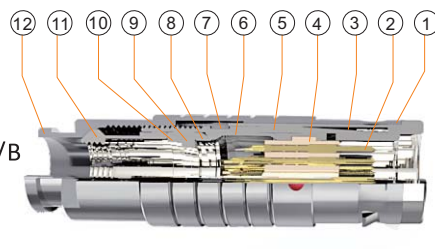

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inner o-ring
- ⑤ Retaining ring
- ⑥ Earthing crown
- ⑦ Insulator
- ⑧ Female contact

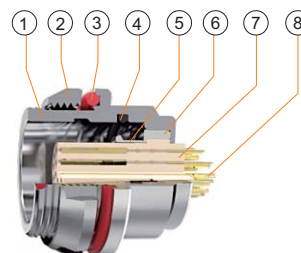


Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibrations	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP 68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHZ	>95 dB	IEC 60619-1-3
	at 1 GHZ	>80 dB	IEC 60619-1-3

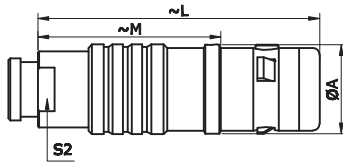


RM-FGG Cable Mount Straight Plug, nut for fitting a bend relief

Reference		Dimensions(mm)			
Model	Series	A	L	M	S2
RM-FGG	0K	11.0	34.0	23.0	7.0
RM-FGG	1K	13.0	42.0	28.0	9.0
RM-FGG	2K	16.0	52.0	36.0	12.0
RM-FGG	3K	19.0	60.0	40.0	15.0

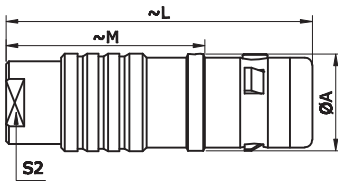


RM-FGG Cable Mount Straight Plug

Reference		Dimensions(mm)			
Model	Series	A	L	M	S2
RM-FGG	0K	11.0	34.0	23.0	7.0
RM-FGG	1K	13.0	42.0	28.0	9.0
RM-FGG	2K	16.0	52.0	36.0	12.0
RM-FGG	3K	19.0	60.0	40.0	15.0




RM-FPG Cable Mount Straight Plug

Reference		Dimensions(mm)							
Model	Series	A	D	H	L	M	S1	S2	S3
RM-FPG	0K	11.0	7.3	25.0	36.0	25.0	9.0	8.0	8.0
RM-FPG	1K	13.0	8.7	33.0	42.0	28.0	11.0	9.0	10.0
RM-FPG	2K	16.0	10.2	40.0	51.0	35.0	14.0	12.0	13.0




RM-EGG Panel Mount Fixed Receptacle

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	N	S1	S3
RM-EGG	0K	18.0	19.2	M14*1.0	6	21.7	4.0	20.0	12.5	17
RM-EGG	1K	20.0	21.5	M16*1.0	9	27.0	4.5	25.1	14.5	19
RM-EGG	2K	25.0	27.0	M20*1.0	9	30.7	5.0	28.6	18.5	24
RM-EGG	3K	31.0	34.0	M24*1.0	11	36.2	6.0	33.6	22.5	30




RM-EEG Panel Mount Fixed Receptacle, back panel mounting

Reference		Dimensions(mm)							
Model	Series	A	B	e	E	M	N	P	S1
RM-EEG	0K	18.0	18.0	M14*1.0	3.4	3.5	20.1	7.0	12.5
RM-EEG	1K	20.0	20.0	M16*1.0	6.2	3.5	25.1	10.0	14.5
RM-EEG	2K	25.0	25.0	M20*1.0	5.0	3.5	28.6	10.0	18.5
RM-EEG	3K	30.0	31.0	M24*1.0	7.5	4.5	33.6	12.0	22.5




RM-EEG Panel Mount Fixed Receptacle elbow 90° contact for printed circuit (back panel mounting)

Reference		Dimensions(mm)							
Model	Series	A	B	e	E	M	N	P	S1
RM-EEG	0K	18.0	18.0	M14*1.0	3.4	3.5	20.1	7.0	12.5
RM-EEG	1K	20.0	20.0	M16*1.0	6.2	3.5	25.1	10.0	14.5
RM-EEG	2K	25.0	25.0	M20*1.0	5.0	3.5	28.6	10.0	18.5
RM-EEG	3K	30.0	31.0	M24*1.0	7.5	4.5	33.6	12.0	22.5




RM-HEG Panel Mount Fixed Receptacle

Reference		Dimensions(mm)							
Model	Series	A	B	e	E	L	M	P	S1
RM-HEG	0K	18.0	18.0	M14*1.0	2.4	21.7	3.5	7.0	12.5
RM-HEG	1K	20.0	20.0	M16*1.0	6.2	30.0	3.5	10.0	14.5
RM-HEG	2K	25.0	25.0	M20*1.0	5.0	33.7	3.5	10.0	18.5




RM-HGG Panel Mount Fixed Receptacle,
Watertight or vacuumtight

Reference		Dimensions(mm)							
Model	Series	A	B	e	E	L	M	S1	S3
RM-HGG	0K	18.0	19.2	M14*1.0	5.5	21.7	4.0	12.5	17.0
RM-HGG	1K	20.0	21.5	M16*1.0	9.0	30.0	4.5	14.5	19.0
RM-HGG	2K	25.0	27.0	M20*1.0	13.0	33.7	5.0	18.5	24.0
RM-HGG	3K	31.0	34.0	M24*1.0	16.0	41.7	6.0	22.5	30.0

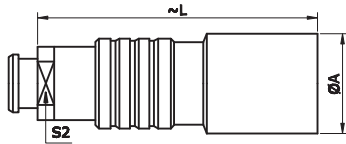

RM-PHG Cable Mounted Receptacles, nut
for fitting a bend relief


Reference		Dimensions(mm)		
Model	Series	A	L	S2
RM-PHG	0K	13.0	34.0	7.0
RM-PHG	1K	15.0	45.0	9.0
RM-PHG	2K	19.0	54.0	12.0
RM-PHG	3K	23.0	64.0	15.0

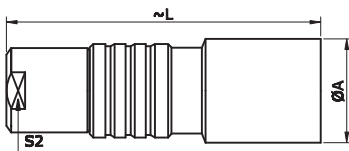

RM-PHG Cable Mounted Receptacles

Reference		Dimensions(mm)		
Model	Series	A	L	S2
RM-PHG	0K	13.0	34.0	8.0
RM-PHG	1K	15.0	45.0	9.0
RM-PHG	2K	19.0	54.0	12.0
RM-PHG	3K	23.0	65.0	15.0

RM-K series Cable collet

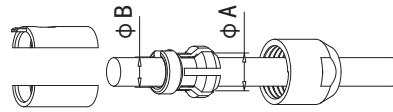

Cable Clamp Set		Cable collet (mm)	Cable dia Range	
type	code	φA	Max	Min
RM-CCT-0K-021	21	2.1	2.2	1.4
RM-CCT-0K-032	32	3.2	3.2	>2.2
RM-CCT-0K-042	42	4.2	4.2	>3.2
RM-CCT-0K-052	52	5.2	5.2	>4.2

Cable Clamp Set		Cable collet (mm)	Cable dia Range	
type	code	φA	Max	Min
RM-CCT-1K-042	42	4.2	4.2	2.5
RM-CCT-1K-052	52	5.2	5.2	>4.2
RM-CCT-1K-062	62	6.2	6.2	>5.2
RM-CCT-1K-072	72	7.2	7.2	>6.2
RM-CCT-1K-076	76	7.6	7.5	7.1 ①

Cable Clamp Set		Cable collet (mm)	Cable dia Range	
type	code	φA	Max	Min
RM-CCT-2K-042	42	4.2	4.2	>3.2
RM-CCT-2K-052	52	5.2	5.2	>4.2
RM-CCT-2K-062	62	6.2	6.2	>5.2
RM-CCT-2K-072	72	7.2	7.2	>6.2
RM-CCT-2K-082	82	8.2	8.2	>7.2
RM-CCT-2K-092	92	9.2	9.2	>8.2
RM-CCT-2K-099	99	9.9	9.7	9.1 ①

Cable Clamp Set		Cable collet (mm)	Cable dia Range	
type	code	φA	Max	Min
RM-CCT-3K-062	62	6.2	6.2	4.9
RM-CCT-3K-072	72	7.2	7.7	>6.2
RM-CCT-3K-082	82	8.2	8.0	7.1
RM-CCT-3K-092	92	9.2	9.2	>7.7
RM-CCT-3K-100	10	10.2	10.7	>9.2
RM-CCT-3K-110	11	11.2	11.0	10.1
RM-CCT-3K-120	12	11.9	11.7	11.1 ①


① This cable collet is only for crimping type cable collet, not fit for cable nut with bend relief type.

Alignment key and Polarized Keys(RM-K series)

RM-K series connector model type are composed of five letters.

The LAST LETTER indicates the key position and the contact type (male or female).

Front view of receptacle



Code	Keys No.	Angles	Series				Contact Type	
			0K	1K	2K	3K	Plug	Receptacle
G	1		0°	0°	0°	0°	Male	Female
A	2	α	30°	30°	30°	30°	Male	Female
B	2		45°	45°	45°	45°	Male	Female
C	2		60°	60°	60°	60°	Male	Female
D	2	γ	95°	95°	95°	95°	Male	Female
E	2	β	120°	120°	120°	120°	Male	Female
F	2		145°	145°	145°	145°	Male	Female
L	2	γ	75°	75°	75°	75°	Female	Male

RAYMO LAB





RM-W series

Deepsea Screw Locking Metal Connector

W series has same insulator and contact configuration as B series:

- *Secure high performance screw locking system*
- *Ideal for using underwater 300m*
- *High pin density contributing to equipment miniaturization*
- *Alignment Key and Polarized Keying System to avoid cross-interface*
- *Sealed up to IP68 and hermetic*
- *360° EMC shielded*
- *Robust and shock resistant designs*
- *Functional in a wide temperature range from -50°C to +250°C*
- *Available solder, PCB and right angle PCB contact*



RM-W series

Plugs




FVG

Receptacles



EVG

Part Numbering System

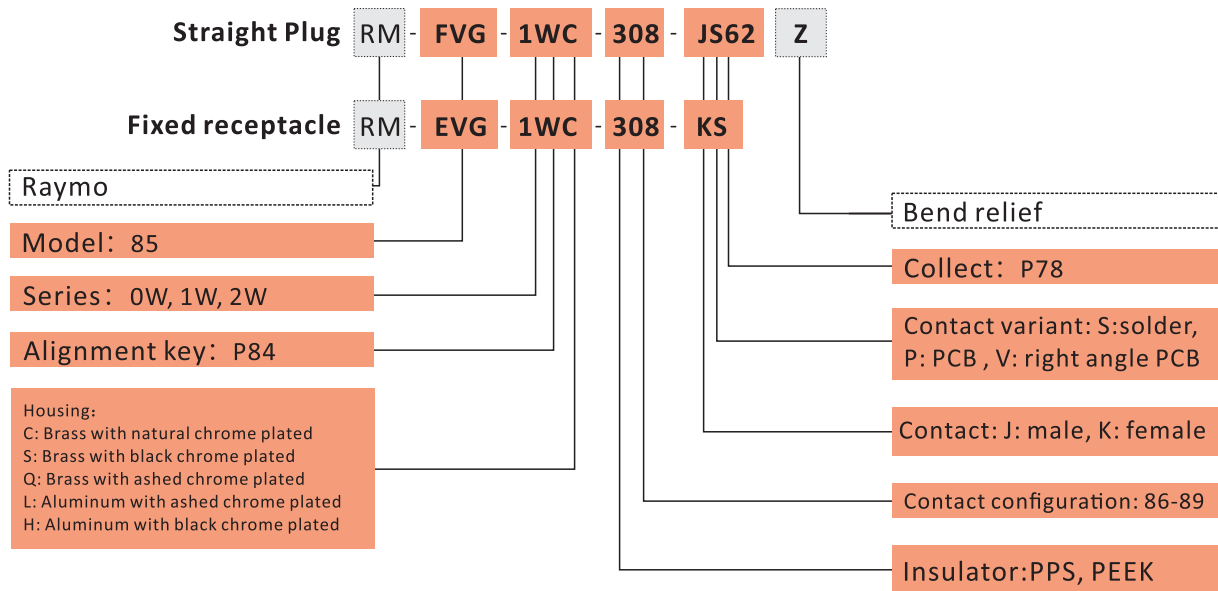

Part No.Example

Straight plug with cable collet

RM-FVG-1WC-308-JS62Z straight plug, 1W series, , multipole 8 contacts, ouer shell in natural chrome -plated brass, PPS insulator, male solder contacts, collet for 5.2-6.2mm diameter cable, with a black bend relief IP68


Fixed receptacle

RM-EVG-1WC-308-KS fixed receptacle, 1W series, mulitpole 8pin, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68

Part Section Showing Internal Components


Cable Mount Plug

- ① Inner shell
- ② Male contact
- ③ O-ring 1
- ④ O-ring 2
- ⑤ Insulator
- ⑥ Plug screw
- ⑦ Snap Spring
- ⑧ Earthing tag
- ⑨ Conical gasket
- ⑩ Inner washer
- ⑪ Cable collet
- ⑫ Collet nut

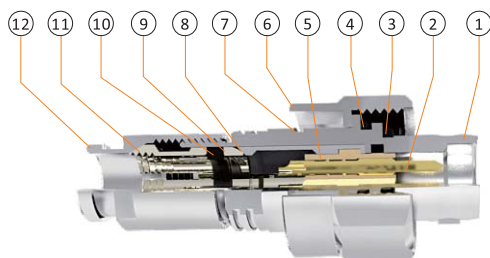

Fixed Receptacle

- ① Outer shell
- ② Insulator
- ③ Washer
- ④ Female contact
- ⑤ Hexagonal nut
- ⑥ Retaing ring

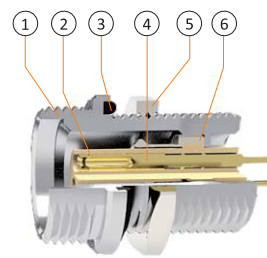

Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibrations	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1

Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10MHZ	>95 dB	IEC 60619-1-3
	at 1GHZ	>80 dB	IEC 60619-1-3

Alignment key and Polarized Keys(RM-W series)


RM-W series connector model type are composed of five letters. The LAST LETTER indicates the key position and the contact type(male or female)

Front view of receptacle




Code	Keys No.	Angles	Series				Contact Type		Remark
			0W	1W	2W	3W	Plug	Receptacle	
G	1		0°	0°	0°	0°	Male	Female	⊖
A	2	α	30°	30°	30°	30°	Male	Female	●
B	2		45°	45°	45°	45°	Male	Female	●
C	2	γ	60°	60°	60°	60°	Male	Female	○

● Available
○ Optional

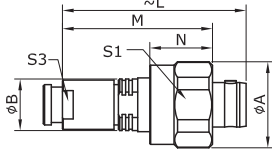

RM-FVG Cable Mount Straight plug, nut for fitting a bend relief

Reference		Dimensions(mm)						
Model	Series	A	B	L	M	N	S3	S3
RM-FVG	0W	17.2	8.9	35.5	30.8	13.5	16	8
RM-FVG	1W	19.3	11.0	43.7	35.5	14.0	18	9
RM-FVG	2W	23.5	14.0	52.5	43.0	15.5	22	12



RM-EVG Fixed socket



























Reference		Dimensions(mm)										
Model	Series	A	B	e	e1	E	L	N	S1	S2	S3	
RM-EVG	0W	16.2	16.0	M12*1.0	M14*1.0	4.0	21.7	8.0	10.5	12.5	14	
RM-EVG	1W	18.3	19.5	M14*1.0	M16*1.0	8.0	27.0	9	12.5	14.5	17	
RM-EVG	2W	22.5	21.8	M16*1.0	M20*1.0	9.0	30.7	12	14.5	18.5	19	

Insulator Configuration

		solder male contact		solder female contact		Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A
		Insulator	Contact No.	ϕ A (MM)	Solder contact	PCB straight contact	PCB elbow contact				
00B			302	2	0.5	●	●	●	1.00	0.95	5.0
			303	3	0.5	●	●	●	0.80	0.95	3.0
			304	4	0.5	●	●	●	0.80	0.65	2.0
0L 0B 0K 0W			302	2	0.9	●	●	●	1.30	1.05	10.0
			303	3	0.9	●	●	●	1.20	0.90	8.0
			304	4	0.7	●	●	●	0.85	0.70	7.0
			305	5	0.7	●	●	●	1.00	0.70	6.5
			306	6	0.5	●	●	●	0.85	0.65	2.5
			307	7	0.5	●	●	●	0.80	0.70	2.5
			309	9	0.5	●	●	○	0.60	0.50	2.0
1L 1B 1K 1W			302	2	1.3	●	●	●	1.50	1.35	15.0
			303	3	1.3	●	●	●	1.30	1.55	12.0
			304	4	0.9	●	●	●	1.35	1.45	10.0
			305	5	0.9	●	●	●	1.25	1.15	9.0

- First choice alternative
- Special order alternative

Insulator Configuration

		solder male contact		solder female contact		Insulator	Contact No.	ϕ A (MM)	Contact type			Test voltage (contact -contact) k/v rms	Test voltage (contact -shell) k/v rms	Rated current /A
									Solder contact	PCB straight contact	PCB elbow contact			
1L 1B 1K 1W			306	6	0.7	●	●	●	1.05	1.20	7.0			
			307	7	0.7	●	●	●	0.95	1.05	7.0			
			308	8	0.7	●	●	●	0.95	1.15	5.0			
			310	10	0.5	●	●	●	0.90	1.50	2.5			
			314	14	0.5	●	●	●	0.80	1.20	2.0			
			316	16	0.5	●	●	○	0.80	1.25	1.5			
2B 2K 2W			302	2	2.0	●	●	●	2.10	1.75	25.0			
			303	3	1.6	●	●	●	2.40	1.85	17.0			
			304	4	1.3	●	●	●	1.85	1.85	15.0			
			305	5	1.3	●	●	●	1.75	1.60	14.0			
			306	6	1.3	●	●	●	1.35	1.45	12.0			
			307	7	1.3	●	●	●	1.35	1.45	11.0			

- First choice alternative
- Special order alternative

Insulator Configuration

					Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A	
solder male contact	solder female contact	Insulator	Contact No.	ϕ A (MM)	Solder contact	PCB straight contact	PCB elbow contact				
2B 2K 2W			308	8	0.9	●	●	●	1.50	1.25	10.0
			310	10	0.9	●	●	●	1.45	1.30	8.0
			312	12	0.7	●	●	●	1.25	1.35	7.0
			314	14	0.7	●	●	●	1.15	1.35	6.5
			316	16	0.7	●	●	●	0.95	1.25	6.0
			318	18	0.7	●	●	●	0.85	1.20	5.5
			319	19	0.7	●	●	●	0.95	1.25	5.0
			326	26	0.5	●	●	○	0.95	1.30	2.0
			332	32	0.5	●	●	○	0.80	1.20	1.5
3B 3K			302	2	3.0	●	○	-	2.10	1.55	35.0
			303	3	2.0	●	●	○	1.90	1.50	25.0

- First choice alternative
- Special order alternative

Insulator Configuration

	Insulator Configuration		Insulator	Contact No.	ϕ A (MM)	Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A
	solder male contact	solder female contact				Solder contact	PCB straight contact	PCB elbow contact			
3B 3K			304	4	2.0	●	●	●	1.45	1.25	19.0
			305	5	1.6	●	●	○	1.90	1.25	19.0
			306	6	1.6	●	●	○	1.60	1.15	17.0
			307	7	1.6	●	●	○	1.70	1.25	15.0
			308	8	1.3	●	●	●	1.65	1.15	13.0
			309	8 1	1.3 2.0	●	●	-	1.35 1.35	1.05 1.05	6.0 15.0
			310	10	1.3	●	●	○	1.25	0.90	12.0
			312	12	0.9	●	●	●	1.45	1.00	9.0
			314	14	0.9	●	●	●	1.20	1.20	9.0
			316	16	0.9	●	●	●	1.20	0.85	8.0
			330	30	0.7	●	●	●	0.8	0.7	3.5
			332	32	0.7	●	●	●	0.75	0.7	3.0

- First choice alternative
- Special order alternative

Applications





RM-S series

Half-moon Push Pull Self-locking Connector

- *Secure high performance push pull self-locking system*
- *Unique half-moon design for blind-mated*
- *High pin density contributing to equipment miniaturization*
- *360° EMC shielded*
- *Robust and shock resistant designs*
- *Functional in a wide temperature range from -50°C to +250°C*
- *Available solder, PCB and right angle PCB contact*




RM-S series

Plugs



FFA



FFA



FFY

Receptacles




ERA




ERN



EPE




PCA



PCA

Part Numbering System

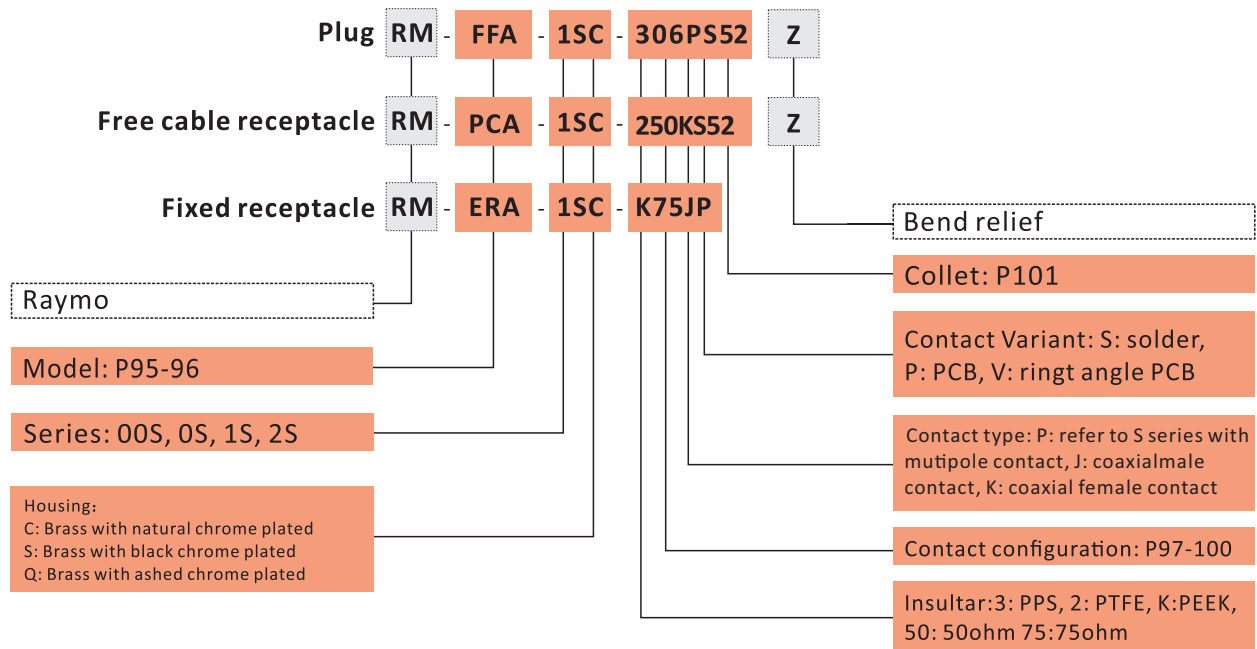

Part Number Example

Straight plug with cable collet

RM-FFA-1SC-306-JS52Z straight plug with cable collet, 1S series, multipole 6 contacts, outer shell in natural chrome-plated brass, PPS insulator, 3 male and 3 female solder contacts, cable collet for 4.2-5.2 mm diameter cable, with a black bend relief.

Fixed receptacle

RM-ERA-1SC-K75-KP fixed receptacle, nut fixing, 1S series, coaxial female contact in PCB type, outshell in natural chrome-plated brass, PEEK insulator.


Free cable receptacle

RM-PCA-1SC-250-KS52Z free cable receptacle with cable collet, 1S series, coaxial female contact, outshell in natural chrome-plated brass, PTFE insulator, collet for 4.2-5.2mm diameter cable with a black colour bend relief.

Part Section Showing Internal Components


Cable Mount Plug

- ① Outer shell
- ② Female contact
- ③ Male contact
- ④ Insulator
- ⑤ Split insert carrier A/B
- ⑥ Latch sleeve
- ⑦ Cable collet
- ⑧ Collet nut

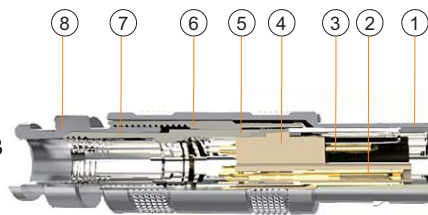

Fixed Receptacle

- ① Male contact
- ② Female contact
- ③ Locking washer
- ④ Hexagonal nut
- ⑤ Outer shell
- ⑥ Earthing crown
- ⑦ Insulator

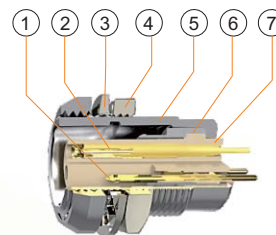


Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95 % at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP 50	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHZ	>75 dB	IEC 60619-1-3
	at 1 GHZ	>40 dB	IEC 60619-1-3

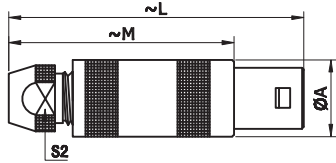


RM-FFA Cable Mount Straight Plug

Reference		Dimensions(mm)			
Model	Series	A	L	M	S2
RM-FFA	00S	6.4	26.0	18.0	4.5
RM-FFA	0S	9.0	34.5	24.5	6.5
RM-FFA	1S	12.0	42.5	31.5	8.5
RM-FFA	2S	14.8	52.0	40.0	11.0
RM-FFA	3S	17.8	61.0	46.0	14.0

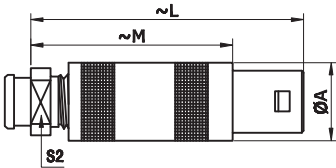


RM-FFA Cable Mount Straight Plug and Nut for fitting a bend relief

Reference		Dimensions(mm)			
Model	Series	A	L	M	S2
RM-FFA	00S	6.4	26.0	18.0	4.5
RM-FFA	0S	9.0	34.5	24.5	6.5
RM-FFA	1S	12.0	42.5	31.5	8.5
RM-FFA	2S	14.8	52.0	40.0	11.0
RM-FFA	3S	17.8	61.0	46.0	14.0

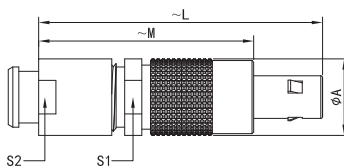

RM-FFY Cable Mount Straight Plug

Reference		Dimensions(mm)				
Model	Series	A	M	L	S1	S2
F-FFY	00	8.9	25.0	33	8.0	8.0




RM-ERA Panel Mount Fixed Receptacle, Nut fixing

Reference		Dimensions(mm)							
Model	Series	A	B	e	E	L	M	S1	S3
RM-ERA	00S	8.0	10.2	M7*0.5	5.5	14.5	1.0	6.3	9.0
RM-ERA	0S	10.0	12.4	M9*0.6	7.0	17.5	1.2	8.2	11.0
RM-ERA	1S	14.0	15.8	M12*1.0	7.5	20.2	1.5	10.5	14.0
RM-ERA	2S	18.0	19.2	M15*1.0	8.5	24.5	1.8	13.5	17.0
RM-ERA	3S	22.0	25.0	M18*1.0	11.5	29.0	2.0	16.5	22.0




RM-ERN Panel Mount Fixed Receptacle, Nut fixing, with earthing tag

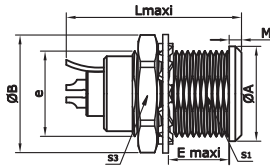


Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	L ¹⁾	M	S1	S3
RM-ERN	0S	10.0	12.4	M9*0.6	7.0	19.3	19.3	1.2	8.2	11.0
RM-ERN	1S	14.0	15.8	M12*1.0	7.5	22.4	22.4	1.5	10.5	14.0
RM-ERN	2S	18.0	19.2	M15*1.0	8.5	26.3	26.3	1.8	13.5	17.0
RM-ERN	3S	22.0	25.0	M18*1.0	11.5	29.8	29.8	2.0	16.5	22.0




RM-EPE Panel Mount Receptacle

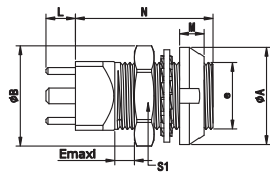

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	M	N	L	S1	
RM-EPE	00S	10.0	10.2	M7*0.5	4.5	2.5	14.0	3.0	9.0	

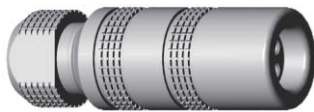


RM-PCA Cable Mount Receptacle

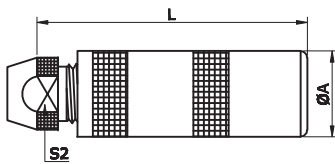

Reference		Dimensions(mm)		
Model	Series	A	L	S2
RM-PCA	00S	6.5	25.0	4.5
RM-PCA	0S	8.9	33.5	6.5
RM-PCA	1S	11.9	40.5	8.5
RM-PCA	2S	14.8	50.0	11.0
RM-PCA	3S	17.8	59.0	14.0






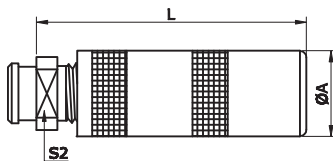



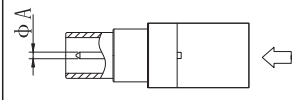

RM-PCA Cable Mount Receptacle,
nut for fitting a bend relief































Reference		Dimensions(mm)		
Model	Series	A	L	S2
RM-PCA	00S	6.5	25.0	6
RM-PCA	0S	8.9	33.5	7
RM-PCA	1S	11.9	40.5	9
RM-PCA	2S	14.8	50.0	12.0
RM-PCA	3S	17.8	59.0	14.0

Insulator Configuration

		Code	Ohm(Ω)	Contact diameter	Contact No.	Contact max. diameter	Insert max. diameter	Voltage standing-wave ratio VSWR(F=GHz)	Test voltage(kv/rms)	Current rate (A)
00S	 	250 ¹⁾	50	0.7	50	1.05	3.05	1.09 +0.11f	2.1	4
0S	 	250	50	0.9	50	0.95	2.95	1.02 +0.25f	1.0	6
1S	 	250	50	1.6	50	1.35	3.95	1.01 +0.23f	1.0	12
		275	75	1.3	75	1.05	3.95	1.02 +0.08f	0.8	10
2S	 	250	50	2.0	50	1.75	5.95	1.01 +0.95f	1.0	15
		275	75	1.6	75	1.35	5.95	1.02 +0.03f	0.5	12



























- First choice alternative
- Special order alternative

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	φ A (MM)	Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
0S			302	2	0.9	●	●	●	1.50	2.10	10.0
			303	3	0.7	●	●	●	1.00	1.50	7.0
			304	4	0.7	●	●	●	1.00	1.50	7.0
1S			302	2	1.3	●	○	○	1.20	1.80	15.0
			303	3	0.9	●	●	○	1.20	1.80	10.0
			304	4	0.9	●	●	●	1.20	1.80	10.0
			305	2	0.9	●	●	●	1.50	2.10	10.0
				3	0.7	●	●	●	1.50	2.10	7.0
			306	6	0.7	●	●	●	1.50	2.10	7.0
2S			302	2	1.6	●	○	○	1.70	2.40	20.0
			303	3	1.3	●	○	○	1.50	2.10	15.0
			304	4	1.3	●	○	○	1.70	2.40	15.0
			305	5	1.3	●	○	○	1.50	2.10	13.0
			306	6	1.3	●	○	○	1.50	2.10	12.0











- First choice alternative
- Special order alternative

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	φ A (MM)	Contact type			Test voltage(contact -contact)/k/v rms	Test voltage(contact -shell)/k/v rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
			307	3 4	1.3 0.9	●	○	○	0.80 0.80	1.20 1.20	12.0 9.0
			308	8	0.9	●	○	○	0.80	1.20	9.0
			310	10	0.9	●	○	○	0.80	1.20	7.0
3S			302	2	2.0	●	●	○	3.0	4.20	23.0
			303	3	2.0	●	○	○	1.50	2.10	20.0
			304	4	2.0	●	○	○	1.50	2.10	18.0
			305	2 3	2.0 1.3	●	○	○	1.50 1.50	2.10 2.10	18.0 14.0
			306	6	1.3	●	○	○	2.10	3.0	14.0
			307	7	1.3	●	○	○	1.0	1.50	12.0
			308	8	1.3	●	○	○	1.0	1.50	10.0
			310	10	1.3	●	○	○	1.0	1.50	9.0
			312	12	0.9	●	○	○	1.50	2.10	8.0


- First choice alternative
- Special order alternative

Insulator Configuration

solder male contact 	solder female contact 	Insulator	Contact No.	φ A (MM)	Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A
					Solder contact	PCB straight contact	PCB elbow contact			
		313	13	0.9	●	○	○	1.50	2.10	8.0
		314	14	0.9	●	○	○	1.50	2.10	7.0
		316	16	0.9	●	○	○	1.0	1.50	7.0
		318	18	0.9	●	○	○	1.0	1.50	6.0

- First choice alternative
- Special order alternative

RM-S series Cable collet

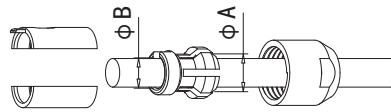

Cable Clamp Set		collet ϕ (mm)	Cable ϕ (mm)	
type	code	ϕ A	Max	Min
RM-CCT-00S-027	27	2.7	2.7	>2.2
RM-CCT-0S-032	32	3.2	3.2	>2.2
RM-CCT-0S-037	37	3.7	3.7	>3.2
RM-CCT-0S-044	44	4.4	4.4	>3.7
RM-CCT-0S-045	45	5.2	5.2	>4.2
RM-CCT-1S-052	52	5.2	5.2	>4.2
RM-CCT-1S-052	52	5.2	5.2	>4.2

Applications






RM-P series

Plastic Push Pull Self-locking Connector

- *Secure Push-pull Self-locking system*
- *High density assembly to save space*
- *Alignment Key and Polarized Keying System to avoid cross-interface*
- *Colorful nut for choice, easy for identify*
- *Available solder, PCB and right angle PCB contact*

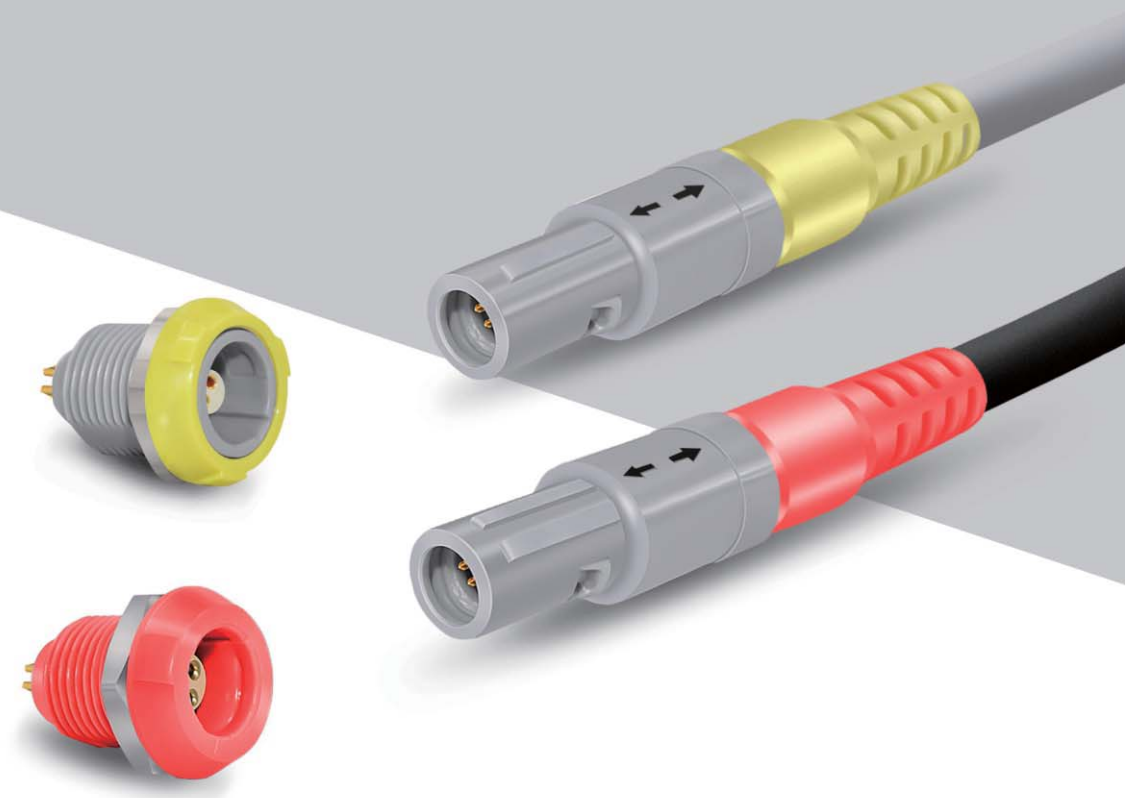

RM-P series

Plugs



PAG



PAG

Receptacles



PKG



PLG



PKG




PRG



PRG

Part Numbering System

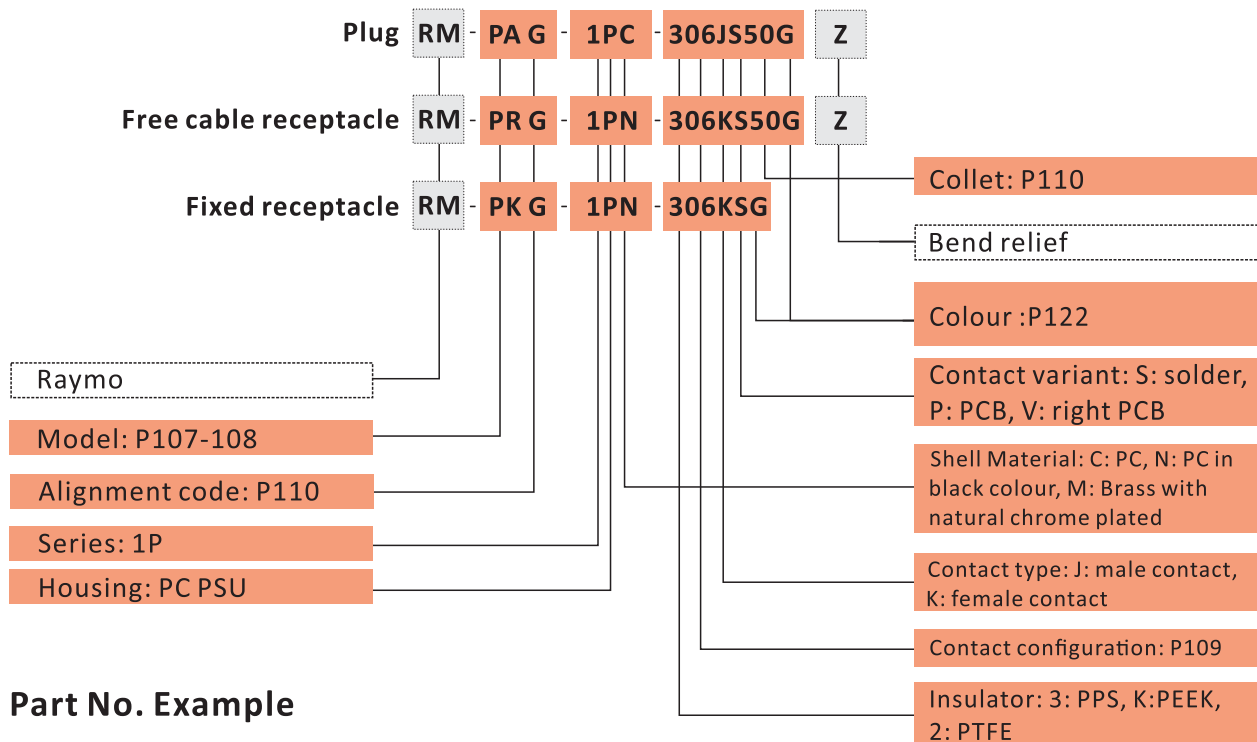

Part No. Example

Straight plug

RM-PAG-1PC-306JS52GZ straight plug with cable collet and alignment key (G=0 degree), multipole 6 male contacts in solder type, gray PC outer shell, PPS insulator, collet for 4.2-5.2mm diameter cable nut for fitting a bend relief, with a gray colour bend relief.

Free cable receptacle

RM-PRG-1PC-306KS52A free cable receptacle with cable collet, alignment key (G=0 degree), multipole 6 female contacts in solder type, gray colour PC outer shell, PPS insulator, collet for cable 4.2-5.2mm and blue colour nut.


Fixed receptacle

RM-PKG-1PC-306KSG fixed receptacle with two nuts and alignment key (G=0 degree), multipole 6 female contacts in solder type, gray colour PC outer shell, PPS insulator, gray colour plastic front nut.

Part Section Showing Internal Components


Cable Mount Plug

- ① Outer shell
- ② latch sleeve
- ③ Insulator
- ④ Male contact
- ⑤ Cable collet
- ⑥ Collet nut

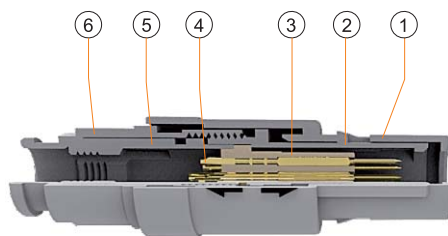

Fixed Receptacle

- ① Outer shell
- ② Front notched nut
- ③ Insulator
- ④ Hexagonal nut
- ⑤ Female contact

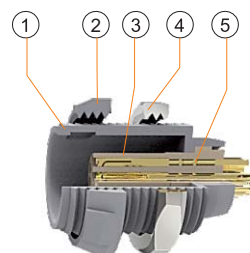


Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>1000cycles	IEC 60512-5 test 9a
Humidity	Up to 95% at 60°C	
Temperature range	-40°C, +150°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>72hrs	IEC 60512-6 test 11f
Protection index (mated)	IP40	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics	Value	Standard	
Shielding efficiency	at 10 MHZ	>75 dB	IEC 60619-1-3
	at 1 GHZ	>40 dB	IEC 60619-1-3

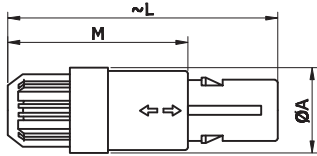


RM-PAG Cable Mount Straight plug

Reference		Dimensions(mm)		
Model	Series	A	L	M
RM-PAG	1P	14	46.5	32

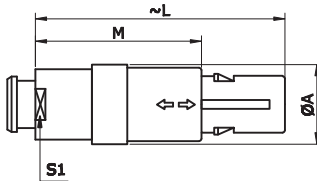


RM-PAG Cable Mount Straight plug , nut for fitting a bend relief

Reference		Dimensions(mm)			
Model	Series	A	L	M	S1
RM-PAG	1P	14	45.5	32	9




RM-PKG Fixed Receptacle with two nuts, back panel mounting

Reference		Dimensions(mm)					
Model	Series	A	L	a	e	S1	S2
RM-PKG	1P	18.5	20.5	2.7	M14*1.0	12.5	17




RM-PLG Fixed Receptacle, all-in-one type, key(G) or and nut fixing

Reference		Dimensions(mm)					
Model	Series	A	L	a	e	S1	S2
RM-PLG	1P	19.5	20.5	2.7	M14*1.0	12.5	17

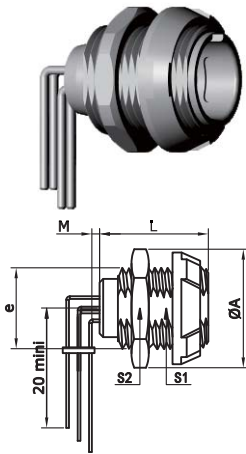


RM-PKG Fixed Receptacle with two nuts, back panel mounting elbow 90° contact for printed circuit

Reference		Dimensions(mm)					
Model	Series	A	L	M	e	S1	S2
RM-PKG	1P	19.5	20.5	2.0	M14*1.0	12.5	17.0

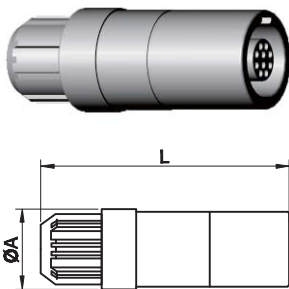

RM-PRG Cable Mount Receptacle





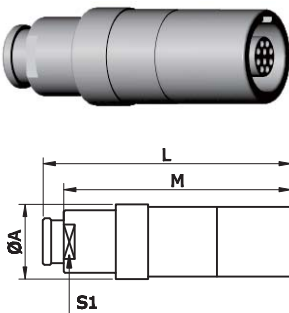







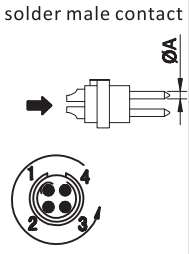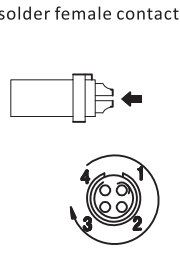











Reference		Dimensions(mm)	
Model	Series	A	L
RM-PRG	1P	14	40



RM-PRG Cable Mount Receptacle, nut for fitting a bend relief


Reference		Dimensions(mm)			
Model	Series	A	L	M	S1
RM-PRG	1P	14	43	38.7	9

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	φ A (MM)	Solder contact	Contact type			Test voltage(contact -contact)k/v rms	Test voltage(contact -shell)k/v rms	Rated current /A
							PCB straight contact	PCB elbow contact				
1P			302	2	1.3	●	●	●	1.20	1.30	10.0	
			303	3	1.3	●	●	●	1.30	1.10	10.0	
			304	4	0.9	●	●	●	1.05	0.8	7.0	
			305	5	0.9	●	●	●	1.05	0.80	7.0	
			306	6	0.7	●	●	●	1.05	0.85	6.0	
			307	7	0.7	●	●	●	1.05	0.85	5.0	
			308	8	0.7	●	●	●	1.05	0.60	5.0	
			309	9	0.5	●	●	●	0.85	0.60	3.0	
			310	10	0.5	●	●	●	0.85	0.45	3.0	
			312	12	0.5	●	●	●	0.60	0.50	2.0	
			314	14	0.5	●	●	●	0.60	0.50	2.0	

- First choice alternative
- Special order alternative

RM-P series Cable collet



Cable Clamp Set	φA (mm)	Cableφ(mm)	
		Min	Max
RM-CCT-1P-039	3.9	2.7	3.9
RM-CCT-1P-052	5.2	4.0	5.2
RM-CCT-1P-065	6.5	5.3	6.5

Alignment keys:



G=standard key

G



A=two key with 40 degree

A




B=two keys with 60 degree

B




C=two keys with 80 degree

C



H=two keys with 170 degree

H



J=two keys with 155 degree

J



RM-H series

Metal Miniature Push Pull Self-locking Connector

- *Secure high performance push pull self-locking system*
- *High pin density and light weight construction*
- *Alignment key and polarized keying system to avoid cross-interface*
- *360° EMC shielded*
- *Robust and shock resistant designs*
- *Available solder, PCB contact*



RM-H series

Plugs



HR10A



HR10A

Receptacles



HR10A



HR10A




HR10A



HR10A

Part Numbering System

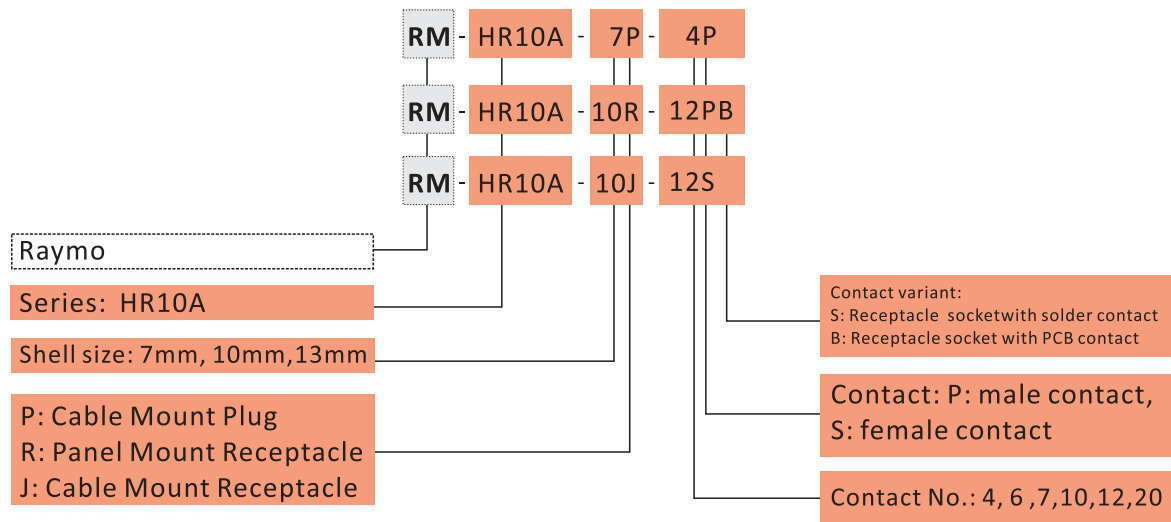

Part No.Example

Straight plug with cable collet

RM-HR10A-7P-6P Cable Mount plug, HR10A series, 7mm shell, multipole 6 contacts, male in solder type, brass-alloyed shell with nickel plated, PPS insulator, black colour bend relief for OD4.2-5.0mm cable.

Fixed receptacle

RM-HR10A-10R-12PN Fixed receptacle, 10mm shell size, 12pin male contact in PCB type, outshell in nickel-plated brass, PPS insulator.


Free cable receptacle

RM-HR10A-10J-12S Free cable receptacle with cable collet, 10mm shell size, 12female contact outshell in nickel-plated brass, PPS insulator, with a black colour bend relief.

Part Section Showing Internal Components


Straight Plug

- ① Male contact
- ② Insulator
- ③ Inner shell
- ④ Snap Spring
- ⑤ Outer shell
- ⑥ Ground crown
- ⑦ Screw
- ⑧ U collet nut

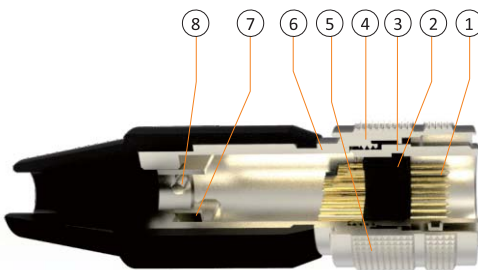

Fixed Receptacle

- ① Locking spring
- ② Outer shell
- ③ Insulator
- ④ Locking gasket
- ⑤ Hexagonal nut
- ⑥ Female contact

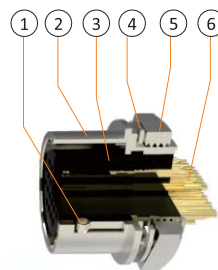


Technical Characteristics

Component	Material	Surface Treatment
Shell	Brass	Nickel
Insulator	PPS	
Male Contact	Brass	Gold or silver
Female Contact	Brass	Gold or silver


Electrical Characteristics

Description	Test Data
Resistance	50 Ω
Insulator Resistance	1000M Ω or more at DC250V
Contact Resistance	Center 6.5m Ω or less and outer 4m Ω or less at DC1A
Test Voltage	AC 250V r.m.s for 1minute
V.S.W.R	1.3 0r less for 0 to 1000MHZ
Force	4.9N 500gf or more

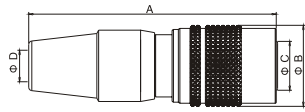


HR10A Cable mount plug

Reference		Dimensions(mm)			
Model	No. of pins	A	B	C	D
7mm	4,6	35	11.5	7.5	5
10mm	10,12	43	14.7	9	7
13mm	20	58.8	19	13	7

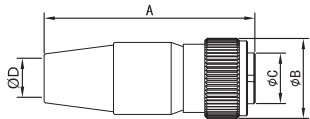


HR10A Cable mount plug

Reference		Dimensions(mm)			
Model	No. of pins	A	B	C	D
10mm	10,12	39.5	14.7	9.5	7




HR10A Panel mount receptacle

Reference		Dimensions(mm)				
Model	No. of pins	A	B	C	D	E
7mm	4,6	14	11	8.85	M11*0.75	10
10mm	10,12	16	14	11.9	M11*0.75	13
13mm	20	19.2	18	15.4	M8*0.5	17




HR10A Panel mount receptacle, printed PCB contact

Reference		Dimensions(mm)				
Model	No. of pins	A	B	C	D	E
7mm	4,6	15.6	11	8.85	M8*0.5	10
10mm	10,12	15.6	14	11.9	M11*0.75	13
13mm	20	17.8	18	15.4	M14*0.5	17



HR10A Panel mount receptacle

Reference		Dimensions(mm)				
Model	No.of pins	A	B	C	D	E
10mm	10,12	16	14	M11 * 0.75	M11 * 0.75	9.6

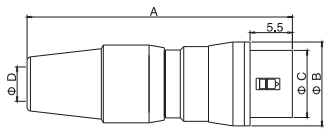

HR10 Cable mount receptacle

Reference		Dimensions(mm)			
Model	No.of pins	A	B	C	D
7mm	4,6	35.3	11	8.85	10
10mm	10,12	43	14	11.9	13

Insulator Configuration


Shell size	7 mm			10 mm	
Contact No. view					
Contact No.	4	5	6	10	12
Test Voltage	AC500V for a minute	AC300V for a minute		AC300V for a minute	
Test Current	2A	2A		2A	
Insulation Resistance	MIN 1,000M Φ	MIN 1,000M Φ		MIN 1,000M Φ	
Contact Resistance	MAX 10m Φ	MAX 10m Φ		MAX 10m Φ	
Solder cup OD	Φ 0.8	Φ 0.8		Φ 0.8	



Shell size	13 mm
Contact No. view	
Contact No.	20
Test Voltage	AC300V for a minute
Test Current	2A
Insulation Resistance	MIN 1,000M Φ
Contact Resistance	MAX 10m Φ
Solder cup OD	Φ 0.8

Note:

- 1: Above view is from socket front view.
- 2: Voltage is test voltage.
- 3: Insulator resistance is tested based on DC100V.
- 4: Contact resistance is tested based on DC100V.



Receptacle PCB type pinout

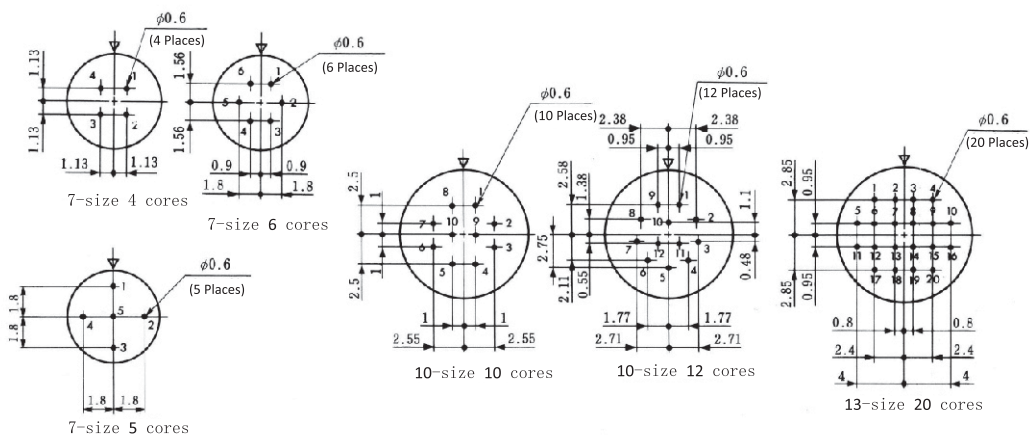

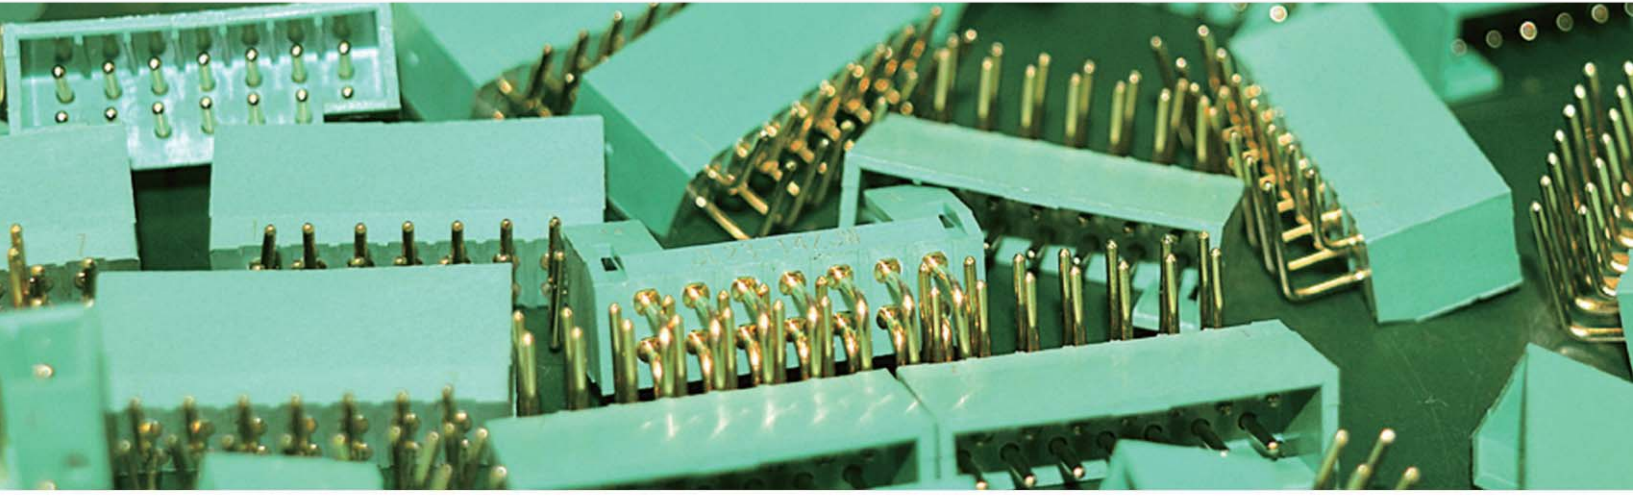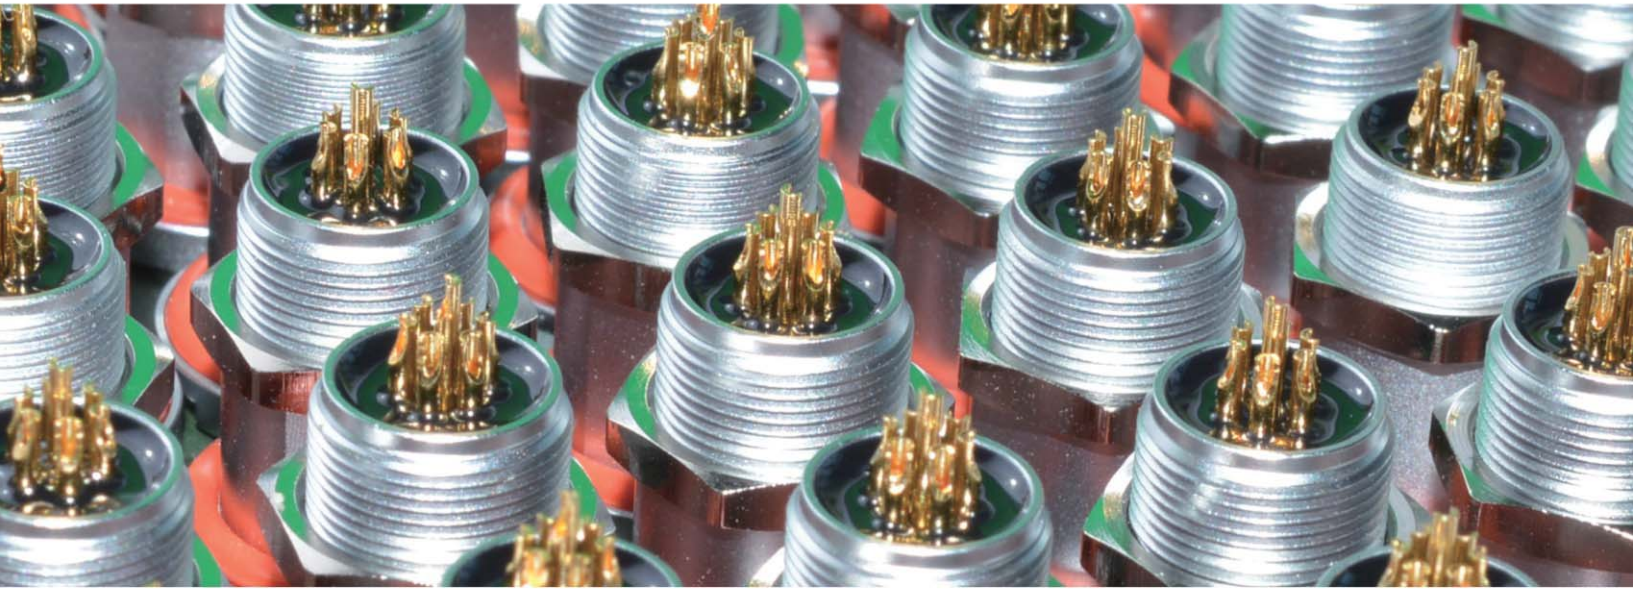





Accessories




Reference		Dimensions(mm)				
Model	Series	A	B	L	N	
BFG-0K-100-NAS	0K	14.0	6	12.5	85	
BFG-1K-100-NAS	1K	16	6	15.5	85	
BFG-2K-100-NAS	2K	19.5	6	17.5	85	
BFG-3K-100-NAS	3K	23.0	6	22.0	120	




Reference		Dimensions(mm)				
Model	Series	A	B	L	N	
BFF-0F-200-NAS	0F	9.8	4	12.5	65	
BFF-1F-200-NAS	1F	12	4	13.5	85	
BFF-AF-200-NAS	AF	14	4	12.5	85	
BFF-2F-200-NAS	2F	16	4	15	120	




Reference		Dimensions(mm)					
Model	Series	A	B	L	M	N	
BRE-00-200-NAS	00	7.5	7.5	8.8	3.5	60	
BRE-0S-200-NAS	0S-0B	9.5	9.5	10.5	4.5	85	
BRE-1S-200-NAS	1S-1B	11.0	11.0	15.5	5.0	85	
BRE-2S-200-NAS	2S-2B	12.0	12.0	14.0	6.0	85	
BRE-3S-200-NAS	3S-3B	14.0	14.0	18.0	8.0	120	




Reference		Dimensions(mm)					
Model	Series	A	B	L	M	N	
FD0FG9-1-ZM-01	0F	10	7	12.8	3	60	
FD1FG9-1-ZM-01	1F	14	12	23.4	8.5	85	
FD2FG9-1-ZM-01	AF	14	11.7	21.6	8.5	85	




Reference		Dimensions(mm)					
Model	Series	A	B	M	L	N	
BRE-0K-200-NAS	0K	15	7	4	15	85	
BRE-1K-200-NAS	1K	17	5.8	6	20	85	
BRE-2K-200-NAS	2K	20.5	5.8	8	24	85	



Reference		Dimensions(mm)					
Model	Series	A	B	C	L	M	N
FD0FG9-1-ZM	0F	10	7	9.1	12.8	3	60
FD1FG9-1-ZM	1F	14	5.8	14.1	13.7	2.3	85
FDAFG9-1-ZM	AF	14	5.8	14.1	13.7	2.3	85
FD2FG9-1-ZM	2F	18	8.0	16.1	14.0	3.0	120



Reference		Dimensions(mm)					
Model	Series	A	B	L	M	S1	
BRP-0F-200-NAS	0F	11.9	11.8	40	6.3	8.0	
BRP-1F-200-NAS	1F	14.1	14.0	60	7.2	12.5	
BRP-AF-200-NAS	AF	14.1	14.0	60	7.2	12	
BRP-2F-200-NAS	2F	16.1	16.0	60	8.0	14.5	




Reference		Dimensions(mm)					
Model	Series	A	B	L	M	S1	
BRP-0B-200-NAS	0B	11.9	9.0	40	6.3	8.0	
BRP-1B-200-NAS	1B	14.1	12.0	60	7.2	10.5	
BRP-2B-200-NAS	2B	16.1	15.0	60	7.2	13.5	

Main characteristics

Material: TPU (Thermoplastic Polyurethane)

Temperature range in dry atmosphere: -60°C +200°C

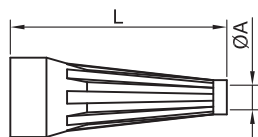

Shell Size	Cable ϕ		Dimensions (mm)		Part Number
	min	max	A	L	
00	2.8	3.1	2.8	22	RM-GMA-0B-028-DG
0B	3.0	3.4	2.5	24	RM-GMA-0B-025-DG
	2.5	3.0	3.0	24	RM-GMA-0B-030-DG
0S	3.0	3.5	3.5	24	RM-GMA-0B-035-DG
0K	3.5	4.0	4.0	24	RM-GMA-0B-040-DG
0F	4.0	4.5	4.5	24	RM-GMA-0B-045-DG
	4.5	5.5	5.5	27	RM-GMA-0B-055-DG
1B	4.0	4.4	4.0	30	RM-GMA-1B-040-DG
1S	4.5	4.9	4.5	30	RM-GMA-1B-045-DG
1K	5.4	6.0	5.4	30	RM-GMA-1B-054-DG
1F	6.5	7.0	6.5	30	RM-GMA-1B-065-DG
	5.0	5.5	5.0	36	RM-GMA-2B-050-DG
2B	6.0	6.5	6.0	36	RM-GMA-2B-060-DG
	7.0	7.7	7.0	36	RM-GMA-2B-070-DG
2K	7.8	8.8	7.8	36	RM-GMA-2B-080-DG
	4.5	5.2	4.5	42	RM-GMA-3B-050-DG
3S	6.0	6.9	6.0	42	RM-GMA-3B-060-DG
3B	7.0	7.9	7.0	42	RM-GMA-3B-070-DG
3K	8.0	8.9	8.0	42	RM-GMA-3B-080-DG
	9.0	10.0	9.0	42	RM-GMA-3B-090-DG
1P	2.7	3.9	3.9	30	RM-GMA-1P-039-DG
	4.0	5.2	5.2	30	RM-GMA-1P-052-DG
	5.2	6.5	6.5	30	RM-GMA-1P-065-DG




Note:

The last letter «G» of the part number indicates the gray colour of the bend relief. For ordering a bend relief with another colour, and replace the letter «G» by the letter of the required colour.

A bend relief made from thermoplastic polyurethane elastomer can be fitted over RAYMO plugs and receptacles that are supplied with nut for fitting such bend relief. They are available in nine different colours match with the GRA insulating washers. Each color has the code listed below.

Code	Colour
A	Blue
B	White
G	Gray
J	Yellow
M	Brown
N	Black
R	Red
S	Orange
V	Green

Panel cut-outs

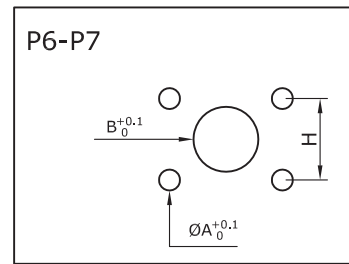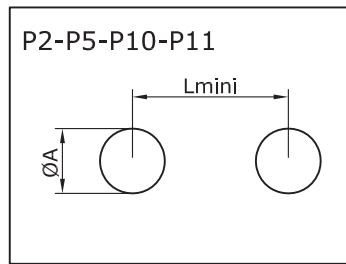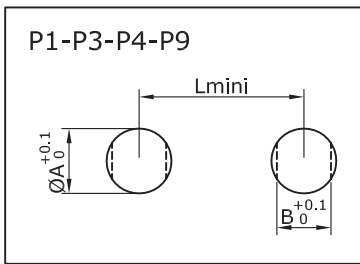

RM-B series

Series	P1			P2		P3			P4			P5		P9			P10	
	$\varnothing A$	B	L	$\varnothing A$	L	$\varnothing A$	B	L	$\varnothing A$	B	L	$\varnothing A$	L	$\varnothing A$	B	L	$\varnothing A$	L
00	7.1	6.4	12.5	7.1	11.5	-	-	-	-	-	-	-	-	7.1	6.4	12.0	-	-
0B	9.1	8.3	14.5	9.1	13.5	14.1	12.6	20.1	10.1	9.1	15.0	8.3	10.5	9.1	8.3	15.0	-	-
1B	12.1	10.6	18.5	-	-	16.1	14.6	22.0	14.1	12.6	21.0	11.2	14.0	12.1	10.6	19.0	11.1	17.0
2B	15.1	13.6	22.5	-	-	19.2	17.1	28.0	16.1	15.1	23.0	13.9	18.0	15.1	13.6	23.0	-	-
3B	18.2	16.6	27.0	-	-	-	-	-	20.2	18.6	29.5	-	-	18.2	16.6	27.0	-	-

Cut-out types

Model	Type	Model	Type
ECG	P1	HCG	P3
EEG	P1	HEG	P9
EHG	P1	HGG	P9
EXG	P2/P10	HHG	P9
FAG	P1	PFG	P1

Mounting nut torque

Series	Torque (Nm)	
	Metal shell	Plastic shell
00	1.0	0.4
0B	2.5	0.4
1B	4.5	0.7
2B	6.0	0.8
3B	9.0	1.0

RM-K series

Series	P1			P6			P7		
	$\varnothing A$	B	L	$\varnothing A$	B	L	$\varnothing A$	B	L
0K	14.1	12.6	20.5	-	-	-	-	-	-
1K	16.1	14.6	22.5	-	-	-	-	-	-
2K	20.2	18.6	29.0	-	-	-	-	-	-
3K	24.2	22.6	35.5	3.5	22.6	20.6	3.5	23.1	23.0

Cut-out types

Model	Type
ECG	P1
EEG	P1

Mounting nut torque

Series	Torque (Nm)
0K	5
1K	7
2K	9
3K	12

RM-S series

Series	P1			P2		P3			P4			P6			P7			P10	
	∅A	B	L	∅A	L	∅A	B	L	∅A	B	L	∅A	B	H	∅A	B	H	∅A	L
00	7.1	6.4	12.5	7.1	11.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0S	9.1	8.3	14.5	9.1	13.5	12.1	10.6	20.0	10.1	9.1	15.0	-	-	-	-	-	-	-	-
1S	12.1	10.6	18.5	12.1	19.0	14.1	12.6	21.0	12.1	10.6	18.0	3.3	12.1	12.7	2.7	11.1	12.4	11.1	17.0
2S	15.1	13.6	22.5	15.1	21.5	16.1	14.6	22.0	16.1	15.1	23.1	3.3	15.1	15.5	-	-	-	-	-
3S	18.2	16.6	27.0	18.2	27.0	20.2	18.6	30.0	20.2	18.6	29.0	3.3	18.2	18.0	-	-	-	-	-

Cut-out types


Model	Type
ERG	P1
ERD	P1

Mounting nut torque


Series	Torque (Nm)	
	Metal shell	Plastic shell
0S	2.5	0.4
1S	4.5	0.7
2S	6.0	0.8
3S	9.0	1.0

PCB drilling pattern


Fixed receptacle with straight print contact (RM-B-K series)

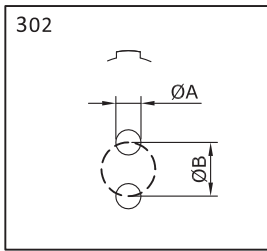


Series	Dimensions(mm)	
	A	B
00	0.6	1.2
0B-0K	0.8	2.2
1B-1K	0.8	2.8
2B-2K	0.8	4.4

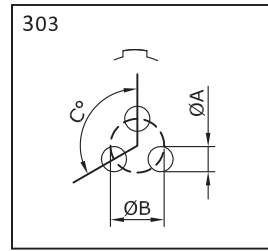


Series	Dimensions(mm)		
	A	B	C
00	0.6	1.35	120°
0B-0K	0.8	2.30	120°
1B-1K	0.8	3.00	120°
2B-2K	0.8	4.60	120°
3B-3K	0.8	5.60	120°

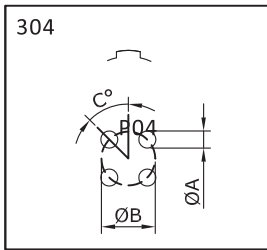


Series	Dimensions(mm)		
	A	B	C
00	0.6	1.6	45°
0B-0K	0.8	2.5	45°
1B-1K	0.8	3.1	45°
2B-2K	0.8	5.0	45°
3B-3K	0.8	6.2	45°

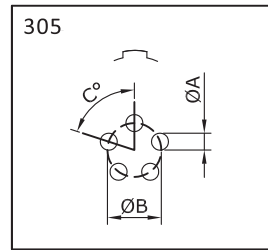


Series	Dimensions(mm)		
	A	B	C
0B-0K	0.6	2.8	72°
1B-1K	0.8	3.4	72°
2B-2K	0.8	5.2	72°
3B-3K	0.8	6.7	72°

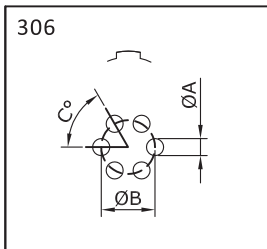


Series	Dimensions(mm)		
	A	B	C
0B-0K	0.6	3.0	60°
1B-1K	0.8	3.7	60°

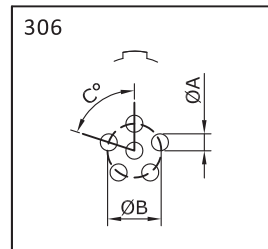


Series	Dimensions(mm)		
	A	B	C
2B-2K	0.8	5.6	72°
3B-3K	0.8	7.1	72°

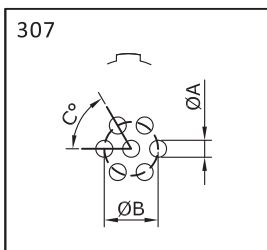


Series	Dimensions(mm)		
	A	B	C
0B-0K	0.6	3.0	60°
1B-1K	0.8	3.7	60°
2B-2K	0.8	5.8	60°
3B-3K	0.8	7.08	60°

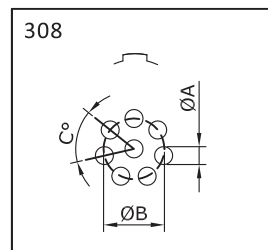


Series	Dimensions(mm)		
	A	B	C
1B-1K	0.8	3.8	51°26'

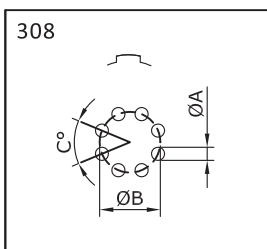


Series	Dimensions(mm)		
	A	B	C
2B-2K	0.8	6.4	45°
3B-3K	0.8	7.5	45°

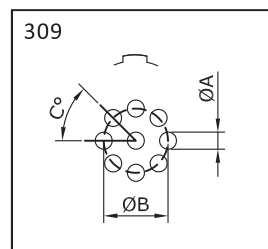

Series	Dimensions(mm)		
	A	B	C
0B-0K	0.6	3.2	45°
3B-3K	0.8	7.5	45°

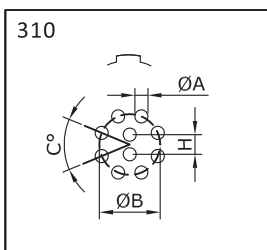


Series	Dimensions(mm)			
	A	B	C	H
1B-1K	0.6	3.95	45°	1.40
2B-2K	0.8	6.2	45°	2.15
3B-3K	0.8	7.9	45°	2.80

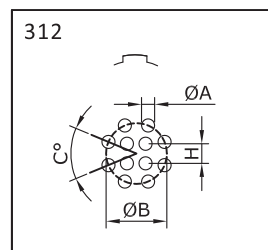


Series	Dimensions(mm)			
	A	B	C	H
2B-2K	0.8	6.5	45°	2.80
3B-3K	0.8	8.2	45°	3.40

PCB drilling pattern


Fixed receptacle with straight print contact (B-K series)

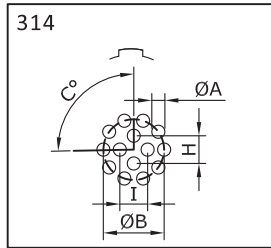


Series	Dimensions(mm)				
	A	B	C	H	I
1B-1K	0.6	4.4	90°	1.90	1.80
2B-2K	0.8	6.5	90°	2.65	2.65
3B-3K	0.8	8.2	90°	3.40	3.40

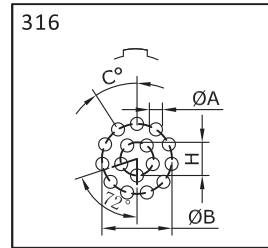


Series	Dimensions(mm)			
	A	B	C	H
1B-1K	0.6	4.4	32°44'	2.0

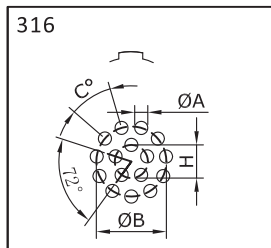

Series	Dimensions(mm)			
	A	B	C	H
2B-2K	0.8	6.6	32°44'	3.10
3B-3K	0.8	8.4	32°44'	3.86

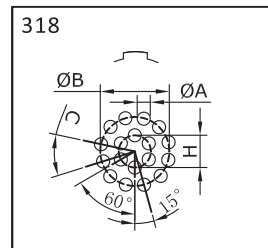


Series	Dimensions(mm)			
	A	B	C	H
2B-2K	0.8	6.7	30°	3.5
3B-3K	0.8	8.4	30°	4.34

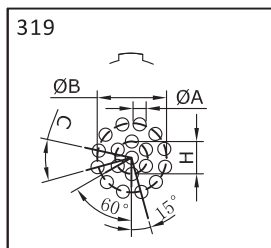

Series	Dimensions(mm)			
	A	B	C	H
2B-2K	0.8	6.7	30°	3.50



Length of straight print contacts (for receptacle)

Series	Contact No.	Dimensions(mm)	
		Ø C	L
00	302	0.5	3.0
	302	0.5	3.0
	302	0.5	3.0
0B 0K	302/303	0.7	3.2
	304/305	0.5	3.2
	306/307/309	0.5	3.2
1B 1K	302/303/303/304/305	0.7	3.0
	306/307/308	0.7	3.0
	310/314/316	0.5	4.0
2B 2K	302/303/304/305/306/307	0.7	3.0
	308/310/314/316/318/319	0.7	3.0
	326/332	0.5	3.0
3B 3K	303/304/305/306/307	0.7	3.0
	308/309/310/312/314/316/318	0.7	3.0
	320/322/324/326/330	0.5	5.0

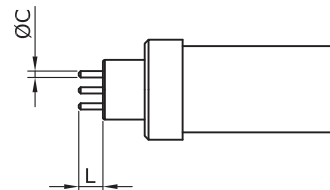


PCB drilling pattern


Fixed receptacle with elbow print contact (RM-B-K series)

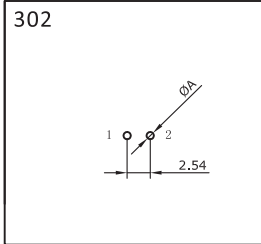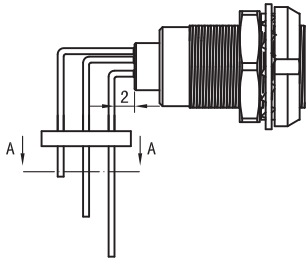













Series	Dimensions (mm)	
	A	
00	0.6	
0B-0K	0.7	
1B-1K	0.9	
2B-2K	0.9	

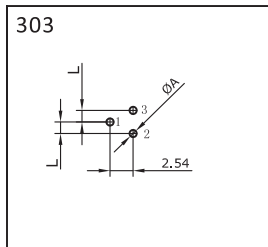

Series	Dimensions(mm)	
	A	L
00	0.6	1.27
0B-0K	0.7	1.27
1B-1K	0.9	1.27
2B-2K	0.9	2.54









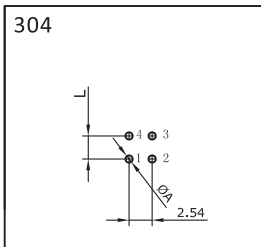


Series	Dimensions(mm)	
	A	L
00	0.6	2.54
0B-0K	0.7	2.54
1B-1K	0.7	2.54
2B-2K	0.9	3.50

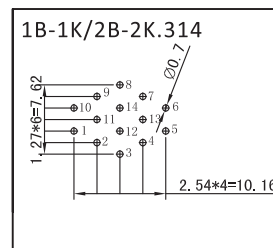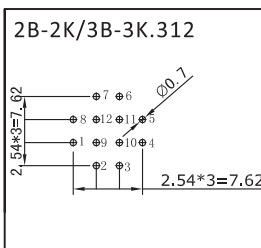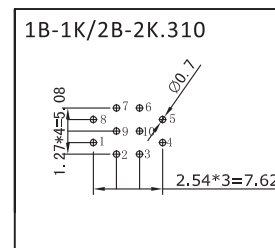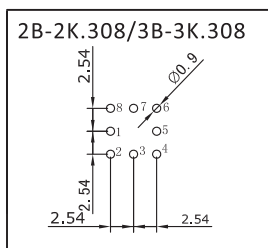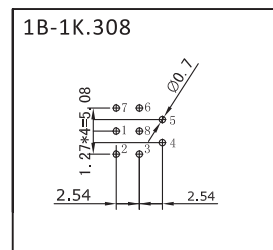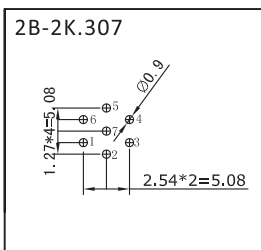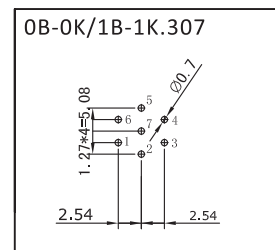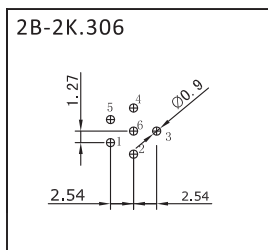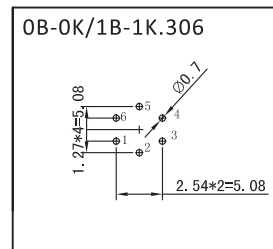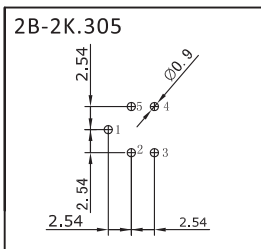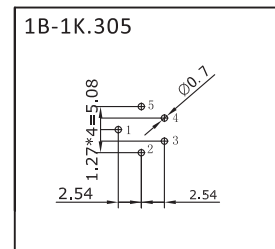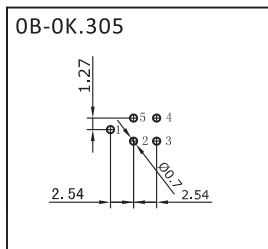

PCB drilling pattern


Fixed receptacle with elbow (90°) print contact (RM-B-K series)

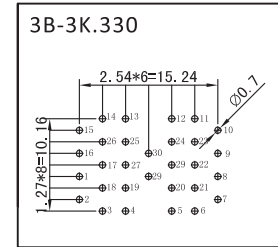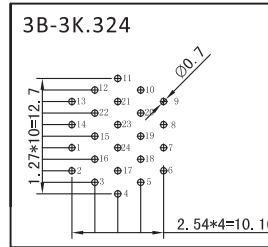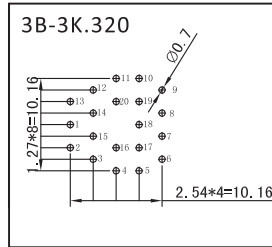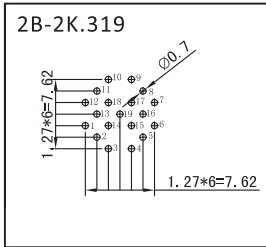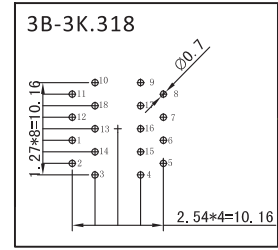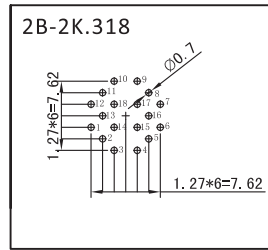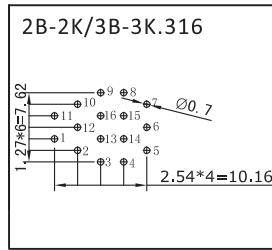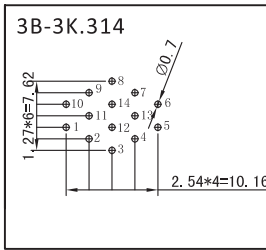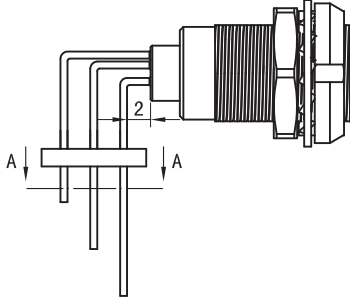




Cable

FC.PUR.N01.1802

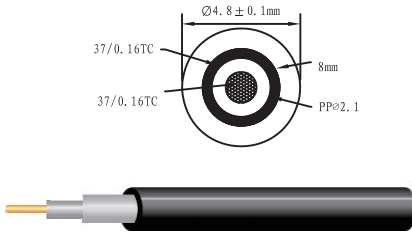


SPECIFICATION	φ4.8(37/0.16TC+SP37/0.16TC) cold-proof-40°C pu cable	
CONDUCTOR	SIZE	0.75 mm ² +0.75 mm ²
	SPECIFICATION MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	& 37/0.16TC
INSULATION	COLOR	tin colour
	AVG . THICK	0.4845mm
	MIN . THICK	0.4246mm
	DIAMETER	φ2.1±0.05mm
SHIELDED	MATERIAL	PP
	COLOR	white
JACKET	MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	37/0.16TC±1 +PT
	AVG . THICK	1.2101
	MIN . THICK	1.1876
	DIAMETER	4.8±0.1mm
MARKING	MATERIAL	cold-proof-40°C pu cable
	COLOR	matt black colour
no letter printed on the cable surface		

FC.PUR.N01.2001

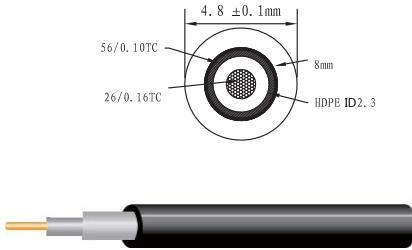


SPECIFICATION	φ4.8(26/0.16TC ID2.3+SP56/0.10TC) cold-proof-40°C pu cable	
CONDUCTOR	SIZE	20AWG
	SPECIFICATION MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	& 26/0.16TC
INSULATION	COLOR	tin colour
	AVG . THICK	0.4845mm
	MIN . THICK	0.4246mm
	DIAMETER	φ2.3±0.05mm
SHIELDED	MATERIAL	HDPE
	COLOR	white
JACKET	MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	56/0.10TC±2 +PT
	AVG . THICK	1.2101
	MIN . THICK	1.1876
	DIAMETER	4.8±0.1mm
MARKING	MATERIAL	cold-proof-40°C pu cable
	COLOR	matt black colour
no letter printed on the cable surface		

FC.PUR.N01.2601

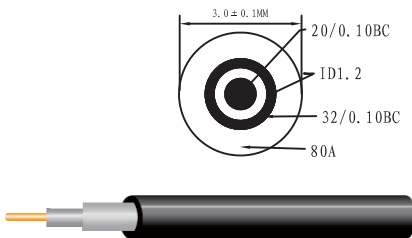


SPECIFICATION	Φ3.0(20/0.10BC++32/0.10Winding shield) cold-proof-40°C pu cable for RCA connector	
CONDUCTOR	SIZE	& 26AWG
	SPECIFICATION MATERIAL	Bare copper
	CONSTRUCTION	& 20/0.10BC
INSULATION	COLOR	Bare copper
	AVG . THICK	0.4845mm
	MIN . THICK	0.4246mm
	DIAMETER	1.2±0.05mm
SHIELDED	MATERIAL	PP
	COLOR	transparent
JACKET	MATERIAL	Bare copper
	CONSTRUCTION	32/0.10BC
	AVG . THICK	0.8001
	MIN . THICK	0.7845
	DIAMETER	Φ3.0±0.1mm
MARKING	MATERIAL	cold-proof-40°C pu cable
	COLOR	matt black colour
no letter printed on the cable surface		

FC.PUR.N01.0301

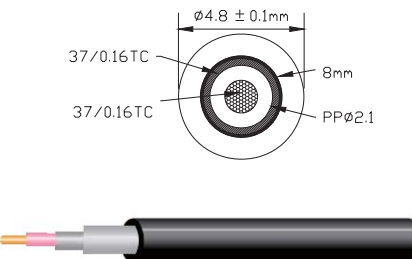


SPECIFICATION	Φ13.0 1C*25mm2+B(braided)+P(cotton paper)	
CONDUCTOR	SIZE	03AWG
	SPECIFICATION MATERIAL	Bare copper
	CONSTRUCTION	196/0.404MM
INSULATION	COLOR	Bare copper
	AVG . THICK	5.10INCH
	MIN . THICK	0.4246mm
	DIAMETER	10.0±0.20MM
SHIELDED	MATERIAL	PP
	COLOR	transparent
JACKET	MATERIAL 1	24*10/0.12MM (Tin-Coated Copper) (10)(covering: 85%MIN)
	MATERIAL 1	cotton paper 0.04*40MM (covering: 125%MIN)
MARKING	DIAMETER	Φ13.00±0.30MM
	MATERIAL	PU-813/85A (-40°C~+80°C) (flame retardant rating: VW-1)
	COLOR	matt black colour
no letter printed on the cable surface		

FC.PUR.N02.1701

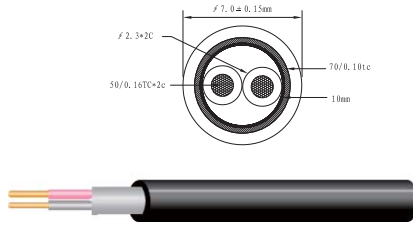


SPECIFICATION	Φ7.0(50/0.16TCID2.3*2c red black+AL+70/0.10TC Winding shield)80A cold-proof-40°C PU black	
CONDUCTOR	SIZE	1.0 mm ²
	SPECIFICATION MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	& 50/0.16TC±2
INSULATION	COLOR	tin colour
	AVG . THICK	0.4954mm
	MIN . THICK	04722.mm
	DIAMETER	φ2.3mm
	MATERIAL	PE+color concentrate
SHIELDED	COLOR	red black
	MATERIAL	Tin-Coated Coppe
JACKET	CONSTRUCTION	SP70/0.10TC±4
	AVG . THICK	0.8001mm
	MIN . THICK	0.7652mm
	DIAMETER	7.0mm±0.15
	MATERIAL	80A PU cold-proof-40°C PU
MARKING	COLOR	matt black colour
	no letter printed on the cable surface	

FC.PUR.N02.2201

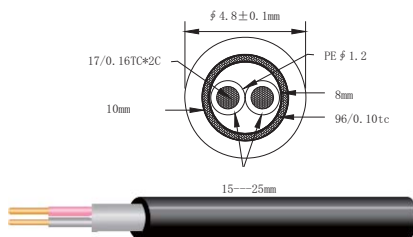


SPECIFICATION	Φ4.8(17/0.16TCID1.2*2C white green +AL+braided 96/0.10TC+PT)80A cold-proof-40°C PU black	
CONDUCTOR	SIZE	22AWG
	SPECIFICATION MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	& 17/0.16TC
INSULATION	COLOR	tin colour
	AVG . THICK	0.2021mm
	MIN . THICK	0.1985mm
	DIAMETER	1.2mm±0.05
	MATERIAL	PE
SHIELDED	COLOR	white green
	MATERIAL	Tin-Coated Copper
JACKET	CONSTRUCTION	AL+braided96/0.10TC±6
	AVG . THICK	1.855mm
	MIN . THICK	1.542mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A PU cold-proof-40°C PU
MARKING	COLOR	matt black colour
	no letter printed on the cable surface	

FC.PUR.N03.1802

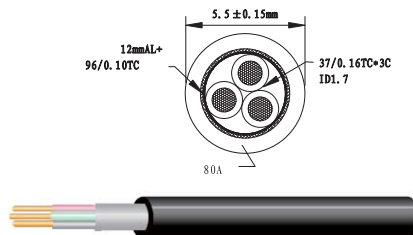


SPECIFICATION	Φ5.5(37/0.16TCID1.7*3c red black yellow +AL+ 96/0.10braided)80A cold-proof-40°C PU black	
CONDUCTOR	SIZE	0.75mm ² *3c
	SPECIFICATION MATERIAL	Bare copper
	CONSTRUCTION	& 37/0.16TC±1
INSULATION	COLOR	tin colour
	AVG . THICK	0.3804mm
	MIN . THICK	0.3254mm
	DIAMETER	φ1.7±0.05
	MATERIAL	PE+color concentrate
SHIELDED	COLOR	red black yellow
	MATERIAL	Tin-Coated Copper
JACKET	CONSTRUCTION	AL+96/0.10TC±6
	AVG . THICK	0.6800mm
	MIN . THICK	0.6542mm
	DIAMETER	5.5mm±0.1
	MATERIAL	80A PU cold-proof-40°C PU
MARKING	COLOR	matt black colour
	no letter printed on the cable surface	

FC.HPU.N03.2401

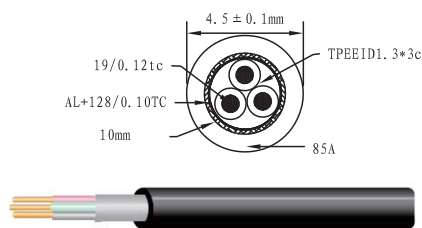


SPECIFICATION	Φ4.5(19/0.12TCID1.3*3c black brown blue +AL+ 128/0.10TC braided+PT)85A Flame-retardant High-temperature-resistance 120°C PU black	
CONDUCTOR	SIZE	24AWG*3c
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	& 19/0.12TC
INSULATION	COLOR	tin colour
	AVG . THICK	0.34mm
	MIN . THICK	0.3mm
	DIAMETER	φ1.3±0.05
	MATERIAL	TPEE+color concentrate
SHIELDED	COLOR	black brown blue
	MATERIAL	Tin-Coated Copper
JACKET	CONSTRUCTION	15MMAL+16/8/0.10TCbraided
	AVG . THICK	0.65mm
	MIN . THICK	0.6mm
	DIAMETER	4.5mm±0.1
	MATERIAL	85A Flame-retardant High-temperature-resistance 120°C PU black
MARKING	COLOR	matt black colour
	no letter printed on the cable surface	

FC.PUR.N04.2401

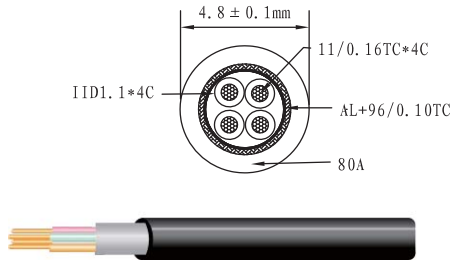


SPECIFICATION		φ4.8(11/0.16TC*4C red yellow black green PE+AL+96/0.10TC+PT)80A cold-proof-40°C PU black
CONDUCTOR	SIZE	24 AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	11/0.16
INSULATION	COLOR	tin colour
	AVG . THICK	0.242 mm
	MIN . THICK	0.217 mm
	DIAMETER	φ1.1mm±0.05
SHIELDED	MATERIAL	Tin-Coated Copper
	CONSTRUCTION	8mmAL+96/0.010TC±5+10mmPT
JACKET	AVG . THICK	0.80mm
	MIN . THICK	0.775mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A PU cold-proof-40°C
MARKING	COLOR	black colour
MARKING		no letter printed on the cable surface

FC.PUR.N04.2426

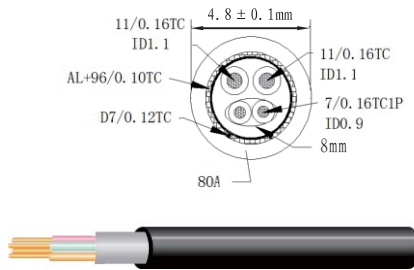


SPECIFICATION		φ4.8(7/0.16TC*1P white green PE+AL+11/0.16TC*2CP red black +AL+07/0.12TC+96/0.10TC)80A cold-proof-40°C PU black
CONDUCTOR	SIZE	26AWG & 24 AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	7/16 & 11/0.16
INSULATION	COLOR	tin colour
	AVG . THICK	0.242 mm
	MIN . THICK	0.217 mm
	DIAMETER	φ0.9mm & 1.1mm±0.05
SHIELDED	MATERIAL	AL+Tin-Coated Copper
	CONSTRUCTION	8mmAL+16/6/0.10TC±6
JACKET	AVG . THICK	0.80mm
	MIN . THICK	0.775mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A cold-proof-40°C PU black
MARKING	COLOR	matt black colour
MARKING		no letter printed on the cable surface

FC.PUR.N05.2401

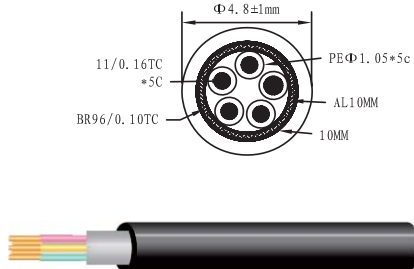


SPECIFICATION		φ4.8(11/0.16TC*1.1PE*5C red black white blue green+AL+BR96/0.10TC+PT) 80A cold-proof-40°C PU black
CONDUCTOR	SIZE	24 AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	11/0.16
INSULATION	COLOR	tin colour
	AVG . THICK	0.2135mm
	MIN . THICK	0.2085mm
	DIAMETER	φ1.05 ±0.05
SHIELDED	MATERIAL	PE
	CONSTRUCTION	red black white blue green
JACKET	MATERIAL	Tin-Coated Copper
	CONSTRUCTION	10mmAL + BR96/0.10±6 +PT
	AVG . THICK	1.275mm
	MIN . THICK	1.125mm
MARKING	DIAMETER	4.8mm±0.1
	MATERIAL	80A cold-proof-40°C PU black
MARKING	COLOR	matt black colour
MARKING		no letter printed on the cable surface

FC.PUR.N05.2426

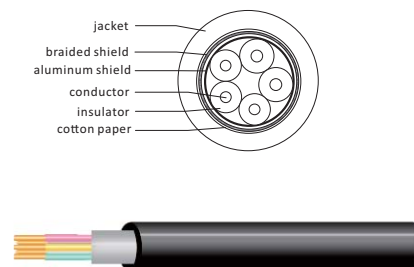


SPECIFICATION		(2C*24AWG black red+3C*26AWG green blue white+AL+B+P) PU-813/80A(Black) (Non-flame-retardant) (temperature-resistance: -40°C~+80°C)
CONDUCTOR	SIZE	24AWG & 26 AWG
	SPECIFICATION MATERIAL	TA
	CONSTRUCTION	11/0.16&7/0.16
INSULATION	STRANDED LAY	0.7INCH&0.6INCH
	DIAMETER	φ2.05mm±0.05
	MATERIAL	HD-PE
	COLOR	black red green blue white
SHIELDED	STRANDED LAY	60±10MM
	AL-FOIL SPECIFICATION	0.02*15MM(Conductive facing outside)
	OVERLAP RATE	Above 25%
MARKING	DIAMETER	4.8mm±0.1
	BRAIDED MATERIAL	16*6/0.10MM TA(12)(covering: 75%MIN)
JACKET	COTTON PAPER MATERIAL	0.04*20MM(covering:125%MIN)
	MATERIAL	PU-813/80A(Black) (Non-flame-retardant) (temperature-resistance: -40°C~+80°C)
MARKING	COLOR	matt black colour
MARKING		no letter printed on the cable surface

FC.PUR.N06.2001

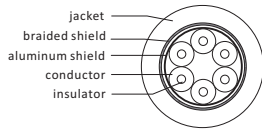


SPECIFICATION	φ7.0(6C*0.5mm2black brown red orange yellow green+AL+B)PU-813/85A(Black) (flame-retardant) (temperature-resistance: -40℃~+80℃)	
CONDUCTOR	SIZE	0.5mm ²
	SPECIFICATION MATERIAL	TA
	CONSTRUCTION	25/0.16mm
INSULATION	STRANDED LAY	0.8INCH
	DIAMETER	φ1.50±0.05MM
	MATERIAL	SR-PVC
STRANDED	COLOR	black brown red orange yellow green
	STRANDED LAY	100±10MM
	AL-FOIL SPECIFICATION	0.02*25MM(anti-surrounding)
SHIELDED	OVERLAP RATE	Above 25%
	MATERIAL	16*7/0.12MM TA (6)
	COVERING	65%MIN
JACKET	DIAMETER	7.00±0.20MM
	MATERIAL	(flame-retardant) (temperature-resistance: -40℃~+80℃)
	COLOR	half-matt black colour
MARKING	no letter printed on the cable surface	

FC.PUR.N06.2426-1

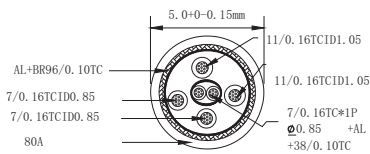


SPECIFICATION	φ5.0(11/0.16TC*1.05*2Cred black+7/0.16TC*0.85*1P white green+38/0.10TC Winding shield+7/0.16TC*0.85*2C blue yellow+AL+96/0.10TC) 80A cold-proof-40℃PU black	
CONDUCTOR	SIZE	26AWG & 24 AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	7/16 & 11/0.16
INSULATION	COLOR	tin colour
	AVG . THICK	0.242 mm
	MIN . THICK	0.217 mm
	DIAMETER	φ0.9mm & 1.1mm±0.05
	MATERIAL	PE
SHIELDED	COLOR	white green & red black
	MATERIAL	AL+Tin-Coated Copper
JACKET	CONSTRUCTION	8mmAL+16/6/0.10TC±6
	AVG . THICK	0.80mm
	MIN . THICK	0.775mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A cold-proof-40℃PU black
MARKING	no letter printed on the cable surface	

FC.PUR.N07.2801

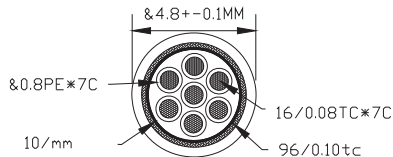


SPECIFICATION	φ4.8<16/0.08TC ID0.8*7C)+AL+96/0.10TC braided > 80A cold-proof-40℃PU black	
CONDUCTOR	SIZE	28AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	16/0.08TC
INSULATION	COLOR	tin colour
	AVG . THICK	0.2305mm
	MIN . THICK	0.2013mm
	DIAMETER	φ0.8±0.05mm
	MATERIAL	PE
SHIELDED	COLOR	white black blue green brown red yellow
	MATERIAL	Tin-Coated Copper
JACKET	CONSTRUCTION	AL+braided96/0.10TC
	AVG . THICK	0.8120mm
	MIN . THICK	0.7921mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A cold-proof-40℃PU black
MARKING	no letter printed on the cable surface	

FC.PUR.N08.2603

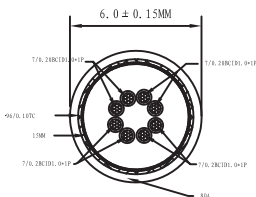


SPECIFICATION	φ6.0(8C HSYV +AL+96/0.10TCV braided+PT) OD6.0 cold-proof-40℃PU	
CONDUCTOR	SIZE	
	SPECIFICATION MATERIAL	Bare copper
	CONSTRUCTION	&7/0.2BC
INSULATION	COLOR	tin colour
	AVG . THICK	0.2305mm
	MIN . THICK	0.2013mm
	DIAMETER	φ1.0±0.05mm
	MATERIAL	PE+color concentrate
SHIELDED	COLOR	yellow white+yellow blue white+blue green white+green brown white+brown
	MATERIAL	Tin-Coated Copper
JACKET	CONSTRUCTION	AL+96/0.10TC braided
	AVG . THICK	1.0982mm
	MIN . THICK	0.9131mm
	DIAMETER	6.0±0.15mm
	MATERIAL	80A PU cold-proof-40℃ PU
MARKING	no letter printed on the cable surface	

FC.PUR.N08.2601

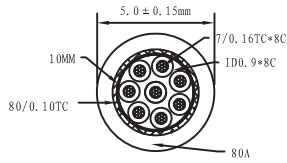


SPECIFICATION	$\phi 5.0(0.7/0.16\text{BC ID}0.9*8\text{C}+\text{AL}+80/0.10\text{ braided})$ +cotten gray colour cold-proof-40°C PU	
CONDUCTOR	SIZE	26AWG
	SPECIFICATION MATERIAL	Bare copper
	CONSTRUCTION	&7/0.16TC
INSULATION	COLOR	Bare copper
	AVG . THICK	0.2305mm
	MIN . THICK	0.2013mm
	DIAMETER	$\phi 0.9 \pm 0.05\text{mm}$
	MATERIAL	HDPE
SHIELDED	MATERIAL	Bare copper
	CONSTRUCTION	AL+80/0.10BC
JACKET	AVG . THICK	1.0982mm
	MIN . THICK	0.9131mm
	DIAMETER	$5.0\text{mm} \pm 0.15$
	MATERIAL	80A cold-proof-40°C PU gray
MARKING	COLOR	gray
	no letter printed on the cable surface	

FC.PUR.N09.2628

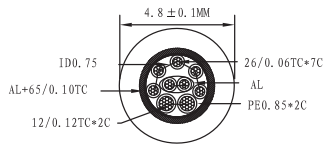


SPECIFICATION	$\phi 4.8(12/0.12\text{TC} \times 0.85\text{PE}+2\text{C}+26/0.06\text{TC} \times 0.65\text{PE} \times 1\text{P}+$ AL+5C+AL+65/0.10TC+PT)cold-proof-40°C PU cable	
CONDUCTOR	SIZE	$2 \times 0.14\text{mm}^2 + 7 \times 0.08\text{mm}^2$
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	12/0.12 & 26/0.06
INSULATION	COLOR	tin color
	AVG . THICK	0.2435mm
	MIN . THICK	0.2185mm
	DIAMETER	$\phi 0.85 \text{ \& } 0.65 \pm 0.05$
	MATERIAL	PE
SHIELDED	MATERIAL	bare copper
	CONSTRUCTION	10mmAL+65/0.10TC braid+PT
JACKET	AVG . THICK	0.975mm
	MIN . THICK	0.925mm
	DIAMETER	$\phi 4.8\text{mm} \pm 0.1$
	MATERIAL	cold-proof-40°C PU cable
MARKING	COLOR	matt black color
	no letter printed on the cable surface	

FC.PUR.N09.2226

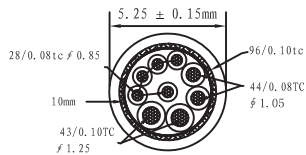


SPECIFICATION	$\phi 5.2 (43/0.10\text{TC} 1.25+44/0.08\text{TC} 1.05+28/0.08\text{TC} 0.85)$ +AL+96/0.10BR cold-proof-40°C PU cable	
CONDUCTOR	SIZE	$2 \times 0.34\text{mm}^2 + 2 \times 0.22\text{mm}^2 + 5 \times 0.14\text{mm}^2$
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	43/0.10TC 44/0.08TC 28/0.08TC
INSULATION	COLOR	tin color
	AVG . THICK	0.2305mm
	MIN . THICK	0.2013mm
	DIAMETER	$\&1.25 \text{ \& } 1.05 \text{ \& } 0.85$
	MATERIAL	PE
SHIELDED	MATERIAL	Tin-Coated copper
	CONSTRUCTION	AL+96/0.10TC braid
JACKET	AVG . THICK	1.0982mm
	MIN . THICK	0.9131mm
	DIAMETER	$\phi 5.25\text{mm} \pm 0.25$
	MATERIAL	cold-proof-40°C PU cable
MARKING	COLOR	matt black color
	no letter printed on the cable surface	

FC.PUR.N10.2224

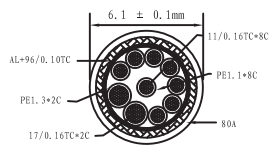


SPECIFICATION	$\phi 6.1(17/0.16\text{TC ID}1.3*2\text{C}+11/0.16\text{ID}1.1*8\text{C})$ +AL+96/0.10TC braid cold-proof -40°C PU cable	
CONDUCTOR	SIZE	$2 \times 0.34\text{mm}^2 + 8 \times 0.2\text{mm}^2$
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	17/0.16TC 11/0.16TC
INSULATION	COLOR	17/0.16TC 11/0.16TC
	AVG . THICK	0.2690mm
	MIN . THICK	0.2453mm
	DIAMETER	$\&1.3 \text{ \& } 1.1 \pm 0.05\text{mm}$
	MATERIAL	PE
SHIELDED	MATERIAL	Tin-Coated copper
	CONSTRUCTION	AL+96/0.10TC braid
JACKET	AVG . THICK	0.6185mm
	MIN . THICK	0.6014mm
	DIAMETER	$\phi 6.1\text{mm} \pm 0.1$
	MATERIAL	cold-proof-40°C PU cable
MARKING	COLOR	matt black color
	no letter printed on the cable surface	

FC.PUR.N10.2601

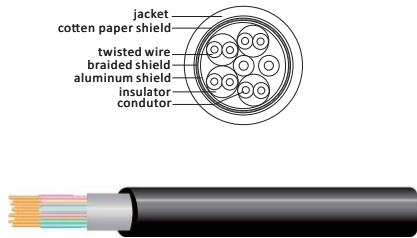


SPECIFICATION	φ7.0(4P*26AWG+2C*26AWG+AL+B+P) cold-proof -40 °C PU cable	
CONDUCTOR	SIZE	10*0.14mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	7/0.165MM, 7/0.16MM
INSULATION	COLOR	tin color
	AVG . THICK	0.89MM
	MIN . THICK	0.87MM
	DIAMETER	8±1.00±0.05MM
	MATERIAL	PE
SHIELDED	COLOR	red,back+blue*white blue orange*white orange green*white green brown*white brown
	MATERIAL	Tin-Coated copper
	CONSTRUCTION	0.020*18MM
JACKET	DIAMETER	φ7.00±0.20MM
	MATERIAL	cold- proof -40°C PU cable
	COLOR	matt black color
MARKING	no letter printed on the cable surface	

FC.PVC.N12.2801

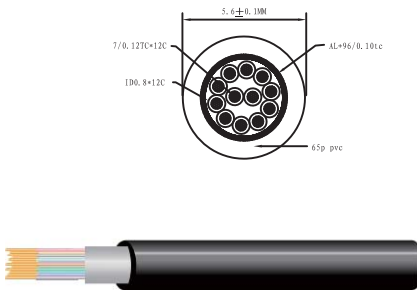


SPECIFICATION	φ5.6(7/12TC*0.8*12C)+AL+96/0.10TC) PVC cable	
CONDUCTOR	SIZE	12*0.08mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	7/0.12
INSULATION	COLOR	tin color
	AVG . THICK	0.2435mm
	MIN . THICK	0.2185mm
	DIAMETER	φ0.8
	MATERIAL	PVC
SHIELDED	COLOR	red,black,white,green,blue,yellow, brown,orange,purple,gray,pink, light blue
	MATERIAL	Bare copper
	CONSTRUCTION	AL+96/0.10TC
JACKET	AVG . THICK	0.975mm
	MIN . THICK	0.925mm
	DIAMETER	φ5.6mm±0.15
	MATERIAL	PVC cable
MARKING	COLOR	matt black color
	no letter printed on the cable surface	

FC.PUR.N13.2601

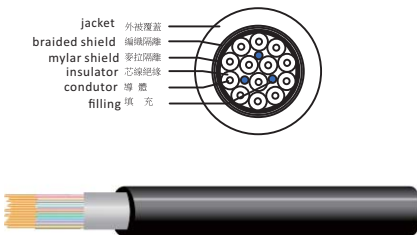


SPECIFICATION	φ6.6 (13C*26AWG+F+MY+B) VW-1 PU cable	
CONDUCTOR	SIZE	13*0.14mm ²
	SPECIFICATION MATERIAL	BA
	CONSTRUCTION	19/0.10MM
INSULATION	COLOR	
	DIAMETER	φ0.90±0.05MM
	MATERIAL	PE
SHIELDED	COLOR	Black,brown,red,orange,yellow, green,blue,purple,gray,white,black white, brown white, red white
	MATERIAL	Bare copper
	CONSTRUCTION	16*5/0.12MM TA
JACKET	DIAMETER	φ6.60±0.20MM
	MATERIAL	VW-1 PU cable
	COLOR	matt black color
MARKING	no letter printed on the cable surface	

FC.PUR.N14.2428-T

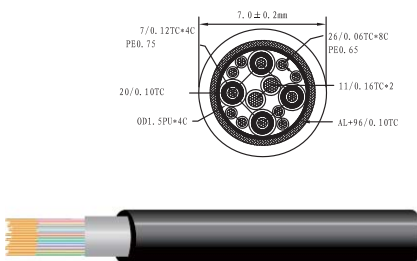


SPECIFICATION	φ7.0 (26/0.06*8C* φ0.65+11/0.16tc*2c φ1.1+(7/0.12tc φ0.75 +sp20/0.10tc) φ1.5+AL+ 96/0.10TC braid) cold-proof -40°C PU cable	
CONDUCTOR	SIZE	2*0.2mm ² +8*0.14mm ² +4*0.08mm ² (50ohm)
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	26/0.06TC 11/0.16TC 7/0.12TC
INSULATION	COLOR	tin color
	AVG . THICK	0.2305mm
	MIN . THICK	0.2013mm
	DIAMETER	8±0.65 & 1.1 & 0.75±0.05mm
	MATERIAL	PE
SHIELDED	COLOR	white,red,black,yellow,green,blue, grey,brown, red black, red,yellow, brown,white
	MATERIAL	Tin-Coated copper
	CONSTRUCTION	20/0.10tc
JACKET	AVG . THICK	1.0982mm
	MIN . THICK	0.9131mm
	DIAMETER	φ7.0mm±0.25
	MATERIAL	cold-proof -40°C PU cable
MARKING	COLOR	matt black color
	no letter printed on the cable surface	

FC.PUR.N15.2401

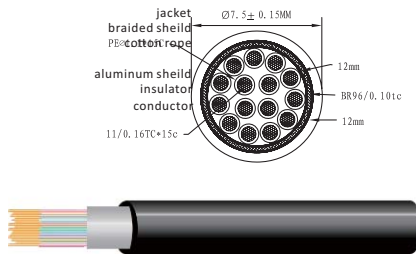

SPECIFICATIN		Ø7.5(11/0.16TC*15c+AL+BR96/0.10TC+PT)Cold-proof -40℃PU cable
CONDUCTOR	SIZE	15*0.2mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	& 11/0.16TC
INSULATION	COLOR	tin color
	AVG . THICK	0.2435mm
	MIN . THICK	0.2113mm
	DIAMETER	Φ1.1±0.05mm
	MATERIAL	PE
SHIELDED	MATERIAL	Tin-Coated copper
	CONSTRUCTION	AL+BR96/0.10TC±6 +PT
JACKET	AVG . THICK	0.7391mm
	MIN . THICK	0.6235mm
	DIAMETER	Φ7.5mm±0.15
	MATERIAL	cold-proof -40℃ PU cable
MARKING	COLOR	matt black color
		no letter printed on the cable surface

FC.PUR.N15.2801-T

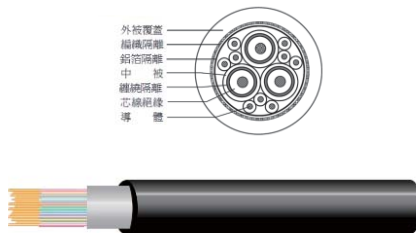


SPECIFICATIN		Ø8.0 (3C*UL1354(S)+9C*28AWG+AL+B/ UL2919) flammability VW-1 cold-proof -55℃ TPU cable
CONDUCTOR	SIZE	9*0.08mm+3*0.08mm (75ohm)
	SPECIFICATION MATERIAL	TA
	CONSTRUCTION	& 11/0.16TC
INSULATION	COLOR	TA
	DIAMETER	Φ1.60±0.05MM / 0.85±0.05MM
	MATERIAL	FM-PE/SR-PVC
SHIELDED	MATERIAL	TA
	CONSTRUCTION	16*9/0.12MM
JACKET	DIAMETER	Φ7.80±0.20MM
	MATERIAL	UL-813/70P cold-proof -40℃ PU cable
	COLOR	matt black color
MARKING		E119932-U AWM 2919 80℃ 30V VW-1 LOW VOLTAGE COMPUTER CABLE COPARTNER

FC.TPU.N16.1401




SPECIFICATIN		Ø12.0 (2P*26# + D + AL + MY) + (2C*14# + AL) + 3C*24# + 7C*26# + AL + B + P cold-proof -40℃ PU cable
CONDUCTOR	SIZE	2*2.0mm+3*0.2mm+7*0.14mm+4*0.14mm
	SPECIFICATION MATERIAL	BA + TA + TA+TA
	CONSTRUCTION	7/0.165MM 41/0.254MM 7/0.20MM 7/0.16MM
INSULATION	COLOR	BA/TA
	DIAMETER	0.87~0.90MM 2.80±0.10MM 1.10±0.05MM 1.0±0.05MM
	MATERIAL	HD-PE
SHIELDED	MATERIAL	TA
	CONSTRUCTION	24*10/0.12MM TA + 0.040*40MM paper
JACKET	DIAMETER	Φ12.0±0.30MM
	MATERIAL	flammability VW-1 cold-proof -55℃ TPU-813 cable
	COLOR	matt black color
MARKING		no letter printed on the cable surface

FC.PUR.N19.2428-S

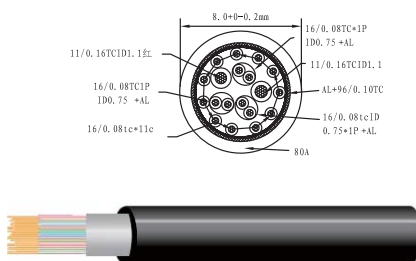


SPECIFICATIN		Ø8.0 (11/0.16TC*1.1*2c+16/0.08TC*0.75*11c+16/0.08TC1P+AL+16/0.08TC1P+AL+16/0.08TC1P+AL) + AL+96/0.10TC cold-proof -40℃ PU cable
CONDUCTOR	SIZE	2*2.0mm ² +17*0.08mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	11/0.16 & 16/0.08
INSULATION	COLOR	tin color
	AVG . THICK	0.2435mm
	MIN . THICK	0.2185mm
	DIAMETER	Φ1.1 Φ 0.75±0.05
	MATERIAL	PE
SHIELDED	MATERIAL	Bare copper
	CONSTRUCTION	15mmAL+96/0.10TC braid+PT
JACKET	AVG . THICK	0.975mm
	MIN . THICK	0.925mm
	DIAMETER	Φ8.0mm±0.2
	MATERIAL	cold-proof -40℃ PU cable
MARKING	COLOR	matt black color
		no letter printed on the cable surface

FC.PUR.N20.3001-T

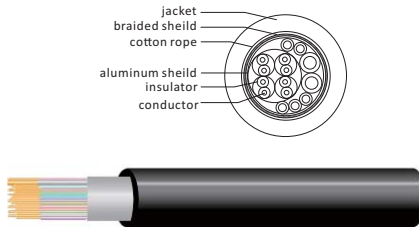

SPECIFICATIN	Φ7.0 (4P*28#+AL)*1C+2C*18#+5C*26#+AL+B+P) PU-813/85A cable	
CONDUCTOR	SIZE	4*0.05mm ² +10*0.05mm ² +0.05mm ² (75ohm)
	SPECIFICATION MATERIAL	BA/TA/TA
	CONSTRUCTION	7/0.127MM 34/0.18MM 7/0.16MM
INSULATION	COLOR	BA/TA/TA
	DIAMETER	Φ0.75±0.05MM/1.80±0.05MM/0.70±0.05MM
	MATERIAL	HD-PE/SR-PVC/HD-PE
SHIELDED	COLOR	red,yellow,brown,orange+brown*white, blue*white,red*white, green*white,black*white+coaxial white
	MATERIAL	TA
	CONSTRUCTION	16*8/0.12MM TA
JACKET	DIAMETER	8.00±0.20MM
	MATERIAL	PU-813/85A
	COLOR	matt black color
MARKING	no letter printed on the cable surface	

FC.PUR.N32.2830-T

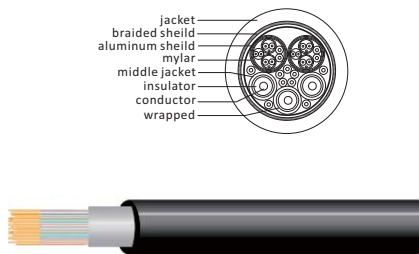

SPECIFICATIN	Φ9.5 ((1C*30#+S)3C+9C*30#+((1P*32#+DAM)2C+1P*32#+2C*28#+ABM)2C+AB) UL-813/70P PU cable	
CONDUCTOR	SIZE	2*0.08mm ² +3*0.05mm ² +9*0.05mm ² +6*0.03mm ² (75ohm)
	SPECIFICATION MATERIAL	TA
	CONSTRUCTION	(1C*30#+S)3C+9C*30H//((1P*32#+DAM)2C+1P*32#+2C*28#+ABM)2C
INSULATION	COLOR	TA
	DIAMETER	Φ1.30±0.05MM/1.30±0.05MM/0.55±0.01MM/0.50±0.05mm/0.65±0.05MM
	MATERIAL	FM-PE/PP/FM-PE+SKIN/HD-PE
SHIELDED	COLOR	red,black+pink,light green,light blue+red, black,brown,orange,yellow,green,blue, purple,gre+yellow*blue,orange*purple, green*white
	MATERIAL	TA
	CONSTRUCTION	24*8/0.12MM TA
JACKET	DIAMETER	9.50±0.20MM
	MATERIAL	UL-813/70P PU cable
	COLOR	matt black color
MARKING	no letter printed on the cable surface	

Product Safety Notice

**PLEASE READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY AND CONSULT ALL RELEVANT NATIONAL AND INTERNATIONAL SAFETY REGULATIONS FOR YOUR APPLICATION.
IMPROPER HANDLING, CABLE ASSEMBLY, OR WRONG USE OF CONNECTORS CAN RESULT IN HAZARDOUS SITUATIONS.**

1. SHOCK AND FIRE HAZARD

Incorrect wiring, the use of damaged components, presence of foreign objects (such as metal debris), and / or residue (such as cleaning fluids), can result in short circuits, overheating, and / or risk of electric shock.

Mated components should never be disconnected while live as this may result in an exposed electric arc and local overheating, resulting in possible damage to components.

2. HANDLING

Connectors and their components should be visually inspected for damage prior to installation and assembly. Suspect components should be rejected or returned to the factory for verification.

Connector assembly and installation should only be carried out by properly trained personnel. Proper tools must be used during installation and / or assembly in order to obtain safe and reliable performance.

3. USE

Connectors with exposed contacts should never be live (or on the current supply side of a circuit). Under general conditions voltages above 30 VAC and 42 VDC are considered hazardous and proper measures should be taken to eliminate all risk of transmission of such voltages to any exposed metal part of the connector.

4. TEST and OPERATING VOLTAGES

The maximum admissible operating voltage depends upon the national or international standards in force for the application in question. Air and creepage distances impact the operating voltage; reference values are indicated in the catalog however these may be influenced by PC board design and / or wiring harnesses.

The test voltage indicated in the catalog is 75% of the mean breakdown voltage; the test is applied at 500 V/s and the test duration is 1 minute.

5. CE MARKING

CE Marking is applied to a complete product or device, and implies that the device complies with one or several European safety directives.

CE Marking can not be applied to electromechanical components such as connectors.

6. PRODUCT IMPROVEMENTS


SHENZHEN RAYMO ELECTRONICS TECHNOLOGY LIMITED have the right to modify and improve to our products or specifications without providing prior notification.



Certificate of High and New Technology Enterprise



SGS

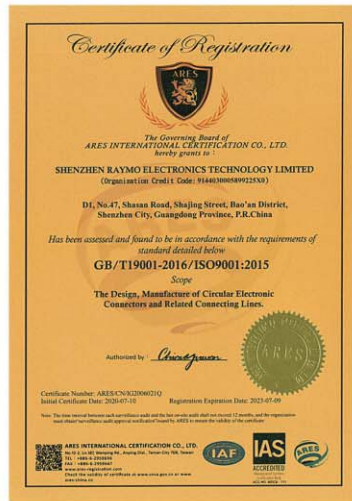

ISO9001:2015



Management System Certificate



CE



ROHS2.0



RAYMO ELECTRONICS TECHNOLOGY LIMITED

Add: 1&4/F,No.2 Blvd, Shasan Industrial Area, Shajing, Bao'an. Shenzhen,China, 518104

Tel: 86 - 0755 - 29872966

Fax: 86 - 0755 - 27573767

Email: sales@raymoconnectors.com

www.raymoconnectors.com

